LEVOLOR®



# Custom Roller Shades

## Reference Guide

September 2026

For more info visit LEVOLOR.com

# TABLE OF CONTENTS


## Product Overview

• Collection Information (includes Opacity) . . . 2-3
• Color Chart. . . . 4-6

## Collection Specifications

• Spec Grid: Continuous Cord Loop / InMotion™ and Cordless . . . 7-64
– Screen Collections . . . 7-21
– Fabric Collections . . . 22-64

## Product Specifications

• Operating Systems: . . . 65-66
- Continuous Cord Loop . . . 65
- PerfectPlacement™ Cordless . . . 66
• Top Treatment Cassettes . . . 66
• Overview InMotion™ Wand . . . 66
• Overview InMotion™ . . . 67-68
• Top Treatment - Fabric Valance . . . 69
• Privacy Side Channels . . . 69
• Railroaded Material . . . 70
• Bottomrail Options . . . 70

## Additional Options

• Roll Direction . . . 71
• 2-on-1 . . . 71
• Magnetic Hold Down Bracket . . . 71
• Cleaning and Care . . . 71
• Product Characteristics & Information . . . 72
• Mounting Requirements . . . 73

## Finished Dimensions

• Continuous Cord Loop and PerfectPlacement™ Cordless . . . 74
• InMotion™ and InMotion™ Wand . . . 75

• Solar Optical Chart and Information . . . 76-79

## Parts and Components

• Deluxe Valance . . . 80
• Cordless Lift PerfectPlacement™ Open Roll . . . 81
• Cordless Lift PerfectPlacement™ Cassette . . . 82
• Continuous Loop Control . . . 83-84
• InMotion™ Wand . . . 85-86


**The following information, listed below, is available online at LEVOLOR.com**

- Terms and Conditions
- Freight
- Warning and Safety Information
- Order Processing
- Claims and Returns
- Warranty

# COLLECTION INFORMATION

| Collection Code | Collection Name | Roll Width | Composition | Opacity | Greenguard Certified | Railroad Option | Splice/ Seam | Bottom Rail Omni Heat Sealed Aluminum | Panel Track |
|---|---|---|---|---|---|---|---|---|---|
| LS013 | 1% Catalina | 118" | 100% TPO -thermoplastic (PVC Free) | 1% Openness | Yes | Yes | No | Omni Only | Yes |
| LS010 | 1% Newport | 98" | 25% Fiberglass, 75% PVC | 1% Openness | Yes | Yes | Yes | All | Yes |
| LS049 | 1% Solapur | 118" | 70% PVC, 30% Polyester | 1% Openness | Yes | Yes | Yes | All | Yes |
| LS008 | 3% Acadia | 118" | 18% Polyester, 25% Recycle Polyester, 57% PVC | 3% Openness | Yes | No | No | All | Yes |
| LS026 | 3% Barcelona | 113" | 70% PVC, 30% Polyester | 3% Openness | No | No | No | All | Yes |
| LS014 | 3% Catalina | 118" | 100% TPO -thermoplastic (PVC Free) | 3% Openness | Yes | Yes | No | Omni Only | Yes |
| LS006 | 3% Malibu | 118" | 30% Polyester, 70%PVC | 3% Openness | Yes | Yes | Yes | All | Yes |
| LS011 | 3% Newport | 98" | 25% Fiberglass, 75% PVC | 3% Openness | Yes | Yes | Yes | All | Yes |
| LS027 | 3% Providence | 113" | 70% PVC, 30% Polyester | 3% Openness | No | No | No | All | Yes |
| LS050 | 3% Revival | 113" | 30% Polyester, 70% PVC | 3% Openness | No | No | No | All | Yes |
| LS028 | 3% Shangrila | 113" | 70% PVC, 30% Polyester | 3% Openness | No | No | No | All | Yes |
| LS048 | 3% Solapur | 118" | 70% PVC, 30% Polyester | 3% Openness | Yes | Yes | Yes | All | Yes |
| LS045 | 3% Stonewash | 113" | 30% Polyester, 70% PVC | 3% Openness | No | No | No | All | Yes |
| LS009 | 5% Acadia | 118" | 18% Polyester, 25% Recycle Polyester, 57% PVC | 5% Openness | Yes | No | No | All | Yes |
| LS015 | 5% Catalina | 118" | 100% TPO -thermoplastic (PVC Free) | 5% Openness | Yes | Yes | No | Omni Only | Yes |
| LS005 | 5% Key West | 118" | 30% Polyester, 70%PVC | 5% Openness | Yes | Yes | Yes | All | Yes |
| LS012 | 5% Newport | 98" | 25% Fiberglass, 75% PVC | 5% Openness | Yes | Yes | Yes | All | Yes |
| LS047 | 5% Solapur | 118" | 70% PVC, 30% Polyester | 5% Openness | Yes | Yes | Yes | All | Yes |
| LS007 | 5% Sonoma | 118" | 30% Polyester, 70%PVC | 5% Openness | Yes | Yes | Yes | All | Yes |
| LS046 | 10% Solapur | 118" | 70% PVC, 30% Polyester | 10% Openness | Yes | Yes | Yes | All | Yes |
| LF038 | Aberdeen | 110" | 100% Polyester | Light Filtering | Yes | No | No | All | Yes |
| LF049 | Aspen | 110" | 100% Polyester | Light Filtering | Yes | No | No | All | Yes |
| LB049 | Aspen Blackout | 110" | 100% Polyester | Blackout | Yes | All | Yes | All | Yes |
| LF026 | Barcelona | 105" | 100% Polyester | Light Filtering | No | No | No | All | Yes |
| LB026 | Barcelona Blackout | 105" | 100% Polyester | Blackout | No | No | No | All | Yes |
| LF019 | Bellamy | 110" | 100% Polyester | Light Filtering | No | No | No | All | Yes |
| LB019 | Bellamy Blackout | 110" | 100% Polyester with Acrylic Coating | Blackout | No | No | No | All | Yes |
| LF054 | Belmont | 118" | 90% Polyester, 10% Cationic Polyester | Semi-Sheer | Yes | No | No | All | Yes |
| LB054 | Belmont Blackout | 118" | 90% Polyester, 10% Cationic Polyester | Blackout | Yes | No | No | All | Yes |
| LF052 | Boulevard | 110" | 100% Polyester | Light Filtering | Yes | No | No | All | Yes |
| LB052 | Boulevard Blackout | 110" | 100% Polyester | Blackout | Yes | No | No | All | Yes |
| LF033 | Brighton | 110" | 100% Polyester | Light Filtering | No | No | No | All | Yes |
| LF046 | Chelsea | 118" | 100% Polyester | Light Filtering | Yes | No | No | All | Yes |
| LB046 | Chelsea Blackout | 118" | 100% Polyester | Blackout | Yes | No | No | All | Yes |
| LF055 | Finnley | 118" | 100% Polyester | Light Filtering | No | No | No | Omni Only | Yes |
| LB055 | Finnley Blackout | 118" | 100% Polyester | Blackout | No | No | No | All | Yes |
| LF050 | Kashia | 94" | 100% Polyester | Light Filtering | No | No | No | All | Yes |
| LF018 | Madison | 110" | 100% Polyester | Light Filtering | No | Yes | Yes | All | Yes |
| LB018 | Madison Blackout | 110" | 100% Polyester with Acrylic Coating | Blackout | No | Yes | Yes | All | Yes |
| LB057 | Midtown Blackout | 110" | 100% Polyester | Blackout | Yes | Yes | Yes | All | Yes |
| LF051 | Monte Vista | 94" | 100% Polyester | Semi-Sheer | No | No | No | All | Yes |
| LB051 | Monte Vista Blackout | 94" | 100% Polyester with Acrylic Coating | Blackout | No | No | No | All | Yes |
| LF056 | Oxford | 94" | 100% Polyester | Light Filtering | No | No | No | All | Yes |
| LB056 | Oxford Blackout | 94" | 100% Polyester | Blackout | No | No | No | All | Yes |
| LF027 | Providence | 113" | 100% Polyester | Light Filtering | No | No | No | All | Yes |
| LB027 | Providence Blackout | 113" | 100% Polyester | Blackout | No | No | No | All | Yes |

NOTE: Refer to the specification charts on pages 7-64 for the minimum and maximum width and height of each fabric for specific system and/or top treatment. .

# COLLECTION INFORMATION

| Collection Code | Collection Name | Roll Width | Composition | Opacity | Greenguard Certified | Railroad Option | Splice/ Seam | Bottom Rail Omni Heat Sealed Aluminum | Panel Track |
|---|---|---|---|---|---|---|---|---|---|
| LF039 | Ravello | 110" | 100% Polyester | Light Filtering | Yes | Yes | Yes | All | Yes |
| LF047 | Revival | 105" | 100% Polyester | Light Filtering | No | No | No | All | Yes |
| LB047 | Revival Blackout | 105" | 100% Polyester | Blackout | No | No | No | All | Yes |
| LF028 | Shangrila | 113" | 100% Polyester | Light Filtering | No | No | No | All | Yes |
| LB028 | Shangrila Blackout | 113" | 100% Polyester | Blackout | No | No | No | All | Yes |
| LF045 | Stonewash | 105" | 100% Polyester | Light Filtering | No | No | No | All | Yes |
| LB045 | Stonewash Blackout | 105" | 100% Polyester | Blackout | No | No | No | All | Yes |
| LF048 | Toulouse | 110" | 100% Polyester | Light Filtering | No | No | No | All | Yes |
| LB048 | Toulouse Blackout | 110" | 100% Polyester with Acrylic Coating | Blackout | No | No | No | All | No |
| LF053 | Valentina | 122" | 100% Polyester | Light Filtering | No | Yes | Yes | All | Yes |
| LB053 | Valentina Blackout | 120" | 100% Polyester | Blackout | No | Yes | Yes | All | Yes |
| LF040 | Valhalla | 110" | 93.3% Polyester, 6.7% Linen | Light Filtering | Yes | No | No | All | No |
| LB058 | Vitality Blackout | 72" | 73% PVC, 27% Woven Fiberglass | Vinyl | Yes | Yes | Yes | All | Yes |
| LF035 | Waverly | 118" | 100% Polyester | Light Filtering | No | No | No | All | Yes |
| LB035 | Waverly Blackout | 118" | 100% Polyester | Blackout | No | No | No | All | Yes |
| LF020 | Westport | 118" | 50% PES/50% ReOcPlastic | Semi-Sheer | Yes | No | No | All | Yes |
| LB020 | Westport Blackout | 114" | 50% PES/50% ReOcPlastic | Blackout | Yes | No | No | All | Yes |

NOTE: Refer to the specification charts on pages 7-64 for the minimum and maximum width and height of each fabric for specific system and/or top treatment. .

# SCREEN COLOR CHART

| Collection Code | Collection Name | Color Code | Screen Color | Component Set |
|---|---|---|---|---|
| LS013 | 1% Catalina | 05 | Onyx | Black |
| LS013 | 1% Catalina | 04 | Bronze | Bronze |
| LS013 | 1% Catalina | 06 | Carbon | Black |
| LS013 | 1% Catalina | 02 | Bone | Vanilla |
| LS013 | 1% Catalina | 03 | Nickel | Gray/Silver |
| LS013 | 1% Catalina | 01 | Powder | White |
| LS010 | 1% Newport | 05 | Onyx | Black |
| LS010 | 1% Newport | 04 | Bronze | Bronze |
| LS010 | 1% Newport | 06 | Carbon | Black |
| LS010 | 1% Newport | 02 | Bone | Vanilla |
| LS010 | 1% Newport | 03 | Nickel | Gray/Silver |
| LS010 | 1% Newport | 01 | Powder | White |
| LS049 | 1% Solapur | 04 | Bronze | Bronze |
| LS049 | 1% Solapur | 03 | Onyx | Black |
| LS049 | 1% Solapur | 01 | Powder | White |
| LS049 | 1% Solapur | 06 | Nickel | Gray/Silver |
| LS049 | 1% Solapur | 05 | Bone | Vanilla |
| LS046 | 10% Solapur | 01 | Powder | White |
| LS046 | 10% Solapur | 03 | Onyx | Black |
| LS046 | 10% Solapur | 04 | Bronze | Bronze |
| LS046 | 10% Solapur | 05 | Bone | Vanilla |
| LS046 | 10% Solapur | 06 | Nickel | Silver |
| LS008 | 3% Acadia | 04 | Onyx | Black |
| LS008 | 3% Acadia | 05 | Carbon | Black |
| LS008 | 3% Acadia | 03 | Nickel | Gray/Silver |
| LS008 | 3% Acadia | 02 | Bone | Vanilla |
| LS008 | 3% Acadia | 01 | Powder | White |
| LS026 | 3% Barcelona | 02 | Marine | White |
| LS026 | 3% Barcelona | 01 | Flintrock | Gray/Silver |
| LS014 | 3% Catalina | 05 | Onyx | Black |
| LS014 | 3% Catalina | 04 | Bronze | Bronze |
| LS014 | 3% Catalina | 06 | Carbon | Black |
| LS014 | 3% Catalina | 02 | Bone | Vanilla |
| LS014 | 3% Catalina | 03 | Nickel | Gray/Silver |
| LS014 | 3% Catalina | 01 | Powder | White |
| LS006 | 3% Malibu | 04 | Honeywheat | White |
| LS006 | 3% Malibu | 01 | Cinnamon | Bronze |
| LS006 | 3% Malibu | 03 | Cappuccino | Vanilla |
| LS006 | 3% Malibu | 02 | Beechwood | Gray/Silver |
| LS011 | 3% Newport | 05 | Onyx | Black |
| LS011 | 3% Newport | 04 | Bronze | Bronze |
| LS011 | 3% Newport | 06 | Carbon | Black |
| LS011 | 3% Newport | 02 | Bone | Vanilla |
| LS011 | 3% Newport | 03 | Nickel | Gray/Silver |
| LS011 | 3% Newport | 01 | Powder | White |
| LS027 | 3% Providence | 02 | Rose | White |
| LS027 | 3% Providence | 05 | Oyster | Vanilla |
| LS027 | 3% Providence | 06 | Julep | Gray/Silver |
| LS027 | 3% Providence | 03 | Fine Silver | Gray/Silver |
| LS027 | 3% Providence | 04 | Blue Jay | Gray/Silver |
| LS050 | 3% Revival | 01 | Static Noise | White |
| LS050 | 3% Revival | 02 | Paradise | White |
| LS050 | 3% Revival | 03 | Enchantment | White |
| LS028 | 3% Shangrila | 02 | Ginger Root | Vanilla |
| LS028 | 3% Shangrila | 03 | Eucalyptus | White |
| LS048 | 3% Solapur | 04 | Bronze | Bronze |
| LS048 | 3% Solapur | 03 | Onyx | Black |
| LS048 | 3% Solapur | 01 | Powder | White |
| LS048 | 3% Solapur | 06 | Nickel | Gray/Silver |
| LS048 | 3% Solapur | 05 | Bone | Vanilla |
| LS045 | 3% Stonewash | 01 | Fossil | Bronze |
| LS045 | 3% Stonewash | 02 | Denim | Silver |
| LS045 | 3% Stonewash | 03 | Ocean | Silver |
| LS009 | 5% Acadia | 04 | Onyx | Black |
| LS009 | 5% Acadia | 05 | Carbon | Black |
| LS009 | 5% Acadia | 03 | Nickel | Gray/Silver |
| LS009 | 5% Acadia | 02 | Bone | Vanilla |
| LS009 | 5% Acadia | 01 | Powder | White |
| LS015 | 5% Catalina | 05 | Onyx | Black |
| LS015 | 5% Catalina | 04 | Bronze | Bronze |
| LS015 | 5% Catalina | 06 | Carbon | Black |
| LS015 | 5% Catalina | 02 | Bone | Vanilla |
| LS015 | 5% Catalina | 03 | Nickel | Gray/Silver |
| LS015 | 5% Catalina | 01 | Powder | White |
| LS005 | 5% Key West | 04 | Oatmeal | White |
| LS005 | 5% Key West | 02 | Doe | Gray/Silver |
| LS005 | 5% Key West | 01 | Cocoa | Bronze |
| LS005 | 5% Key West | 07 | Iron Ore | Black |
| LS005 | 5% Key West | 03 | Mink | Gray/Silver |
| LS005 | 5% Key West | 05 | Burlap | Gray/Silver |
| LS005 | 5% Key West | 06 | Barley | Vanilla |
| LS012 | 5% Newport | 05 | Onyx | Black |
| LS012 | 5% Newport | 04 | Bronze | Bronze |
| LS012 | 5% Newport | 06 | Carbon | Black |
| LS012 | 5% Newport | 02 | Bone | Vanilla |
| LS012 | 5% Newport | 03 | Nickel | Gray/Silver |
| LS012 | 5% Newport | 01 | Powder | White |
| LS047 | 5% Solapur | 04 | Bronze | Bronze |
| LS047 | 5% Solapur | 03 | Onyx | Black |
| LS047 | 5% Solapur | 01 | Powder | White |
| LS047 | 5% Solapur | 06 | Nickel | Gray/Silver |
| LS047 | 5% Solapur | 05 | Bone | Vanilla |
| LS007 | 5% Sonoma | 02 | Ocean | Gray/Silver |
| LS007 | 5% Sonoma | 01 | Moss | Gray/Silver |
| LS007 | 5% Sonoma | 10 | Toast | Vanilla |
| LS007 | 5% Sonoma | 03 | Biscuit | Gray/Silver |
| LS007 | 5% Sonoma | 05 | Blush | White |
| LS007 | 5% Sonoma | 09 | Merlot | Black |
| LS007 | 5% Sonoma | 07 | Java | Black |
| LS007 | 5% Sonoma | 06 | Rosemary | Gray/Silver |
| LS007 | 5% Sonoma | 04 | Sea Glass | Gray/Silver |
| LS007 | 5% Sonoma | 08 | Pebble | Gray/Silver |

Component Set includes plastic chain, chain tensioner, top treatments with end caps, open roll bracket covers, and bottom rail with end caps and are pre-selected based on screen/fabric color.

# FABRIC COLOR CHART

| Collection Code | Collection Name | Color Code | Fabric Color | Component Set |
|---|---|---|---|---|
| LF038 | Aberdeen | 04 | Onyx | Black |
| LF038 | Aberdeen | 03 | Shell | Gray/Silver |
| LF038 | Aberdeen | 02 | Bone | White |
| LF038 | Aberdeen | 01 | Pearl | White |
| LF049 | Aspen | 01 | Heathered | Gray/Silver |
| LF049 | Aspen | 02 | Champagne | Vanilla |
| LF049 | Aspen | 03 | Laurel | White |
| LF049 | Aspen | 04 | Winter White | White |
| LB049 | Aspen Blackout | 01 | Heathered | Gray/Silver |
| LB049 | Aspen Blackout | 02 | Champagne | Vanilla |
| LB049 | Aspen Blackout | 03 | Laurel | White |
| LB049 | Aspen Blackout | 04 | Winter White | White |
| LF026 | Barcelona | 02 | Marine | White |
| LF026 | Barcelona | 01 | Flintrock | Gray/Silver |
| LB026 | Barcelona Blackout | 02 | Marine | White |
| LB026 | Barcelona Blackout | 01 | Flintrock | Gray/Silver |
| LF019 | Bellamy | 03 | Blue Steel | Gray/Silver |
| LF019 | Bellamy | 02 | Carbonite | Black |
| LF019 | Bellamy | 04 | Green Tea | Gray/Silver |
| LF019 | Bellamy | 01 | Barley | Vanilla |
| LB019 | Bellamy Blackout | 03 | Blue Steel | Gray/Silver |
| LB019 | Bellamy Blackout | 02 | Carbonite | Black |
| LB019 | Bellamy Blackout | 04 | Green Tea | Gray/Silver |
| LB019 | Bellamy Blackout | 01 | Barley | Vanilla |
| LF054 | Belmont | 10 | Whisper | White |
| LF054 | Belmont | 11 | Champagne | White |
| LF054 | Belmont | 12 | Dove | Black |
| LB054 | Belmont Blackout | 10 | Whisper | White |
| LB054 | Belmont Blackout | 11 | Champagne | White |
| LB054 | Belmont Blackout | 12 | Dove | Black |
| LF052 | Boulevard | 06 | Iron Ore | Black |
| LF052 | Boulevard | 01 | Alabaster | Vanilla |
| LF052 | Boulevard | 02 | Drift Wood | Gray/Silver |
| LF052 | Boulevard | 05 | Coconut | White |
| LB052 | Boulevard Blackout | 06 | Iron Ore | Black |
| LB052 | Boulevard Blackout | 01 | Alabaster | Vanilla |
| LB052 | Boulevard Blackout | 02 | Drift Wood | Gray/Silver |
| LB052 | Boulevard Blackout | 05 | Coconut | White |
| LF033 | Brighton | 02 | Toasted Almond | Vanilla |
| LF033 | Brighton | 04 | Brushed Silver | Gray/Silver |
| LF033 | Brighton | 01 | Shaved Coconut | White |
| LF033 | Brighton | 03 | Weathered Bronze | Silver |
| LF046 | Chelsea | 01 | Pearl Dust | White |
| LF046 | Chelsea | 02 | Sandy Beige | Silver |
| LF046 | Chelsea | 03 | Slate Gray | Black |
| LB046 | Chelsea Blackout | 01 | Pearl Dust | White |
| LB046 | Chelsea Blackout | 02 | Sandy Beige | Silver |
| LB046 | Chelsea Blackout | 03 | Slate Gray | Black |
| LF055 | Finnley | 000 | Whisper | White |
| LF055 | Finnley | 002 | Light Gray | Silver |
| LF055 | Finnley | 003 | Sand | Vanilla |
| LB055 | Finnley Blackout | 000 | Whisper | White |
| LB055 | Finnley Blackout | 001 | Light Gray | Silver |
| LB055 | Finnley Blackout | 003 | Sand | Vanilla |
| LF050 | Kashia | 201 | Arabica Roast | Bronze |
| LF050 | Kashia | 202 | Lentil Bean | Vanilla |
| LF018 | Madison | 01 | Sea Oats | Silver |
| LF018 | Madison | 02 | Biscuit | Vanilla |
| LF018 | Madison | 04 | Denim | Gray/Silver |
| LF018 | Madison | 03 | Nutmeg | Bronze |
| LB018 | Madison Blackout | 02 | Biscuit | Vanilla |
| LB018 | Madison Blackout | 04 | Denim | Gray/Silver |
| LB018 | Madison Blackout | 03 | Nutmeg | Bronze |
| LB018 | Madison Blackout | 01 | Sea Oats | Silver |
| LB057 | Midtown Blackout | 04 | Oatmeal | Gray/Silver |
| LB057 | Midtown Blackout | 01 | Ivory | White |
| LF051 | Monte Vista | 101 | Stormy Night | Gray/Silver |
| LF051 | Monte Vista | 100 | Driftwood | Gray/Silver |
| LF051 | Monte Vista | 106 | Prairie Sky | Bronze |
| LF051 | Monte Vista | 107 | Desert Horizon | Bronze |
| LB051 | Monte Vista Blackout | 02 | Stormy Night | Gray/Silver |
| LB051 | Monte Vista Blackout | 01 | Driftwood | Gray/Silver |
| LB051 | Monte Vista Blackout | 04 | Prairie Sky | Bronze |
| LB051 | Monte Vista Blackout | 03 | Desert Horizon | Bronze |
| LF056 | Oxford | 01 | Powder | White |
| LF056 | Oxford | 02 | Candlelight | White |
| LF056 | Oxford | 03 | Mushroom | Vanilla |
| LF056 | Oxford | 04 | Storm Cloud | Silver |
| LF056 | Oxford | 05 | Charcoal | Black |
| LF056 | Oxford | 06 | Taupe | Silver |
| LB056 | Oxford Blackout | 01 | Powder | White |
| LB056 | Oxford Blackout | 02 | Candlelight | White |
| LB056 | Oxford Blackout | 03 | Mushroom | Vanilla |
| LB056 | Oxford Blackout | 04 | Storm Cloud | Silver |
| LB056 | Oxford Blackout | 05 | Charcoal | Black |
| LF027 | Providence | 01 | Antique | White |
| LF027 | Providence | 02 | Rose | White |
| LF027 | Providence | 05 | Oyster | Vanilla |
| LF027 | Providence | 06 | Julep | Gray/Silver |
| LF027 | Providence | 03 | Fine Silver | Gray/Silver |
| LF027 | Providence | 04 | Blue Jay | Gray/Silver |
| LB027 | Providence Blackout | 02 | Rosse | White |
| LB027 | Providence Blackout | 05 | Oyster | Vanilla |
| LB027 | Providence Blackout | 06 | Julep | Gray/Silver |
| LB027 | Providence Blackout | 03 | Fine Silver | Gray/Silver |
| LB027 | Providence Blackout | 04 | Blue Jay | Gray/Silver |
| LF039 | Ravello | 01 | Whisper | White |
| LF039 | Ravello | 03 | Silver Mist | Gray/Silver |
| LF039 | Ravello | 02 | Candlelight | White |
| LF047 | Revival | 01 | Static Noise | White |
| LF047 | Revival | 02 | Paradise | White |
| LF047 | Revival | 03 | Enchantment | White |

Component Set includes plastic chain, chain tensioner, top treatments with end caps, open roll bracket covers, and bottom rail with end caps and are pre-selected based on screen/fabric color.

# FABRIC COLOR CHART

| Collection Code | Collection Name | Color Code | Fabric Color | Component Set |
|---|---|---|---|---|
| LB047 | Revival Blackout | 01 | Static Noise | White |
| LB047 | Revival Blackout | 02 | Paradise | White |
| LB047 | Revival Blackout | 03 | Enchantment | White |
| LF028 | Shangrila | 01 | Wonton | White |
| LF028 | Shangrila | 02 | Ginger Root | Vanilla |
| LF028 | Shangrila | 03 | Eucalyptus | White |
| LB028 | Shangrila Blackout | 03 | Eucalyptus | White |
| LB028 | Shangrila Blackout | 02 | Ginger Root | Vanilla |
| LF045 | Stonewash | 01 | Fossil | Bronze |
| LF045 | Stonewash | 02 | Denim | Silver |
| LF045 | Stonewash | 03 | Ocean | Silver |
| LB045 | Stonewash Blackout | 01 | Fossil | Bronze |
| LB045 | Stonewash Blackout | 02 | Denim | Silver |
| LB045 | Stonewash Blackout | 03 | Ocean | Silver |
| LF048 | Toulouse | 06 | Iron | Black |
| LF048 | Toulouse | 08 | Nickel | Gray/Silver |
| LF048 | Toulouse | 07 | Daylight | White |
| LF048 | Toulouse | 03 | Dove | Gray/Silver |
| LF048 | Toulouse | 05 | Charcoal | Gray/Silver |
| LF048 | Toulouse | 02 | Blush | Vanilla |
| LF048 | Toulouse | 01 | Snowfall | White |
| LB048 | Toulouse Blackout | 06 | Iron | Black |
| LB048 | Toulouse Blackout | 08 | Nickel | Gray/Silver |
| LB048 | Toulouse Blackout | 07 | Daylight | White |
| LB048 | Toulouse Blackout | 03 | Dove | Gray/Silver |
| LB048 | Toulouse Blackout | 05 | Charcoal | Gray/Silver |
| LB048 | Toulouse Blackout | 02 | Blush | Vanilla |
| LB048 | Toulouse Blackout | 01 | Snowfall | White |
| LF053 | Valentina | 13 | Nickel | Gray/Silver |
| LF053 | Valentina | 08 | Toast | Gray/Silver |
| LF053 | Valentina | 11 | Mist | Gray/Silver |
| LF053 | Valentina | 02 | Oyster | White |
| LF053 | Valentina | 14 | Skyline | Black |
| LF053 | Valentina | 17 | Soft Gray | White |
| LF053 | Valentina | 12 | Taupe | Gray/Silver |
| LF053 | Valentina | 03 | Gray Sky | White |
| LF053 | Valentina | 05 | Stone | Gray/Silver |
| LF053 | Valentina | 18 | Khaki | Vanilla |
| LF053 | Valentina | 01 | Cotton | White |
| LF053 | Valentina | 04 | Mink | Bronze |
| LB053 | Valentina Blackout | 02 | Oyster | White |
| LB053 | Valentina Blackout | 03 | Toast | Vanilla |
| LB053 | Valentina Blackout | 06 | Skyline | Gray/Silver |
| LB053 | Valentina Blackout | 09 | Mist | Gray/Silver |
| LB053 | Valentina Blackout | 07 | Nickel | Gray/Silver |
| LB053 | Valentina Blackout | 11 | Soft Gray | White |
| LB053 | Valentina Blackout | 01 | Cotton | White |
| LB053 | Valentina Blackout | 10 | Gray Sky | White |
| LB053 | Valentina Blackout | 12 | Khaki | Vanilla |
| LB053 | Valentina Blackout | 04 | Mink | Gray/Silver |
| LB053 | Valentina Blackout | 05 | Taupe | Bronze |
| LB053 | Valentina Blackout | 08 | Stone | Gray/Silver |
| LF040 | Valhalla | 03 | Rye | Gray/Silver |
| LF040 | Valhalla | 02 | Wheat | Vanilla |
| LF040 | Valhalla | 01 | Oats | White |
| LB058 | Vitality Blackout | 11 | Cream | Vanilla |
| LB058 | Vitality Blackout | 05 | Warm White | Vanilla |
| LB058 | Vitality Blackout | 01 | White | White |
| LF035 | Waverly | 01 | Bone | White |
| LF035 | Waverly | 02 | Linen | Vanilla |
| LF035 | Waverly | 04 | Smoke | Black |
| LF035 | Waverly | 03 | Dove | Bronze |
| LB035 | Waverly Blackout | 01 | Bone | White |
| LB035 | Waverly Blackout | 02 | Linen | Vanilla |
| LB035 | Waverly Blackout | 04 | Smoke | Black |
| LB035 | Waverly Blackout | 03 | Dove | Bronze |
| LF020 | Westport | 06 | Pepper | Black |
| LF020 | Westport | 05 | Key Lime | Gray/Silver |
| LF020 | Westport | 03 | Silverdrop | Vanilla |
| LF020 | Westport | 04 | Amethyst | Gray/Silver |
| LF020 | Westport | 02 | Silverleaf | Gray/Silver |
| LF020 | Westport | 01 | Cotton | White |
| LB020 | Westport Blackout | 06 | Pepper | Black |
| LB020 | Westport Blackout | 03 | Silverdrop | Vanilla |
| LB020 | Westport Blackout | 02 | Silverleaf | Gray/Silver |
| LB020 | Westport Blackout | 01 | Cotton | White |

Component Set includes plastic chain, chain tensioner, top treatments with end caps, open roll bracket covers, and bottom rail with end caps and are pre-selected based on screen/fabric color.


# PRODUCT SIZE SPECIFICATIONS

| Collection Code | Collection Name | Max Width Non-Railroaded | Max Width Railroaded | Available with Seam |
|---|---|---|---|---|
| LS013 | 1% Catalina | 118" | 132" | No |

- Railroad Fabrics (turned width for length) will have a visible seam when fabricated longer than the maximum roll width less 16".
- Maximum width of continuous Fabric Valance = Maximum published non-railroaded width less 8"
- Maximum Width and Height for No-Drill Headrail is 84". Not available at all Retailers.

| Top Treatment | Legend | | |
|---|---|---|---|
| Medium Cassette | | | |
| Large Cassette | | | |
| Fabric Valance | | | |
| Open Roll | | | |

## Control System and Top Treatment Compatibility Chart - Continuous Cord Loop & InMotion™

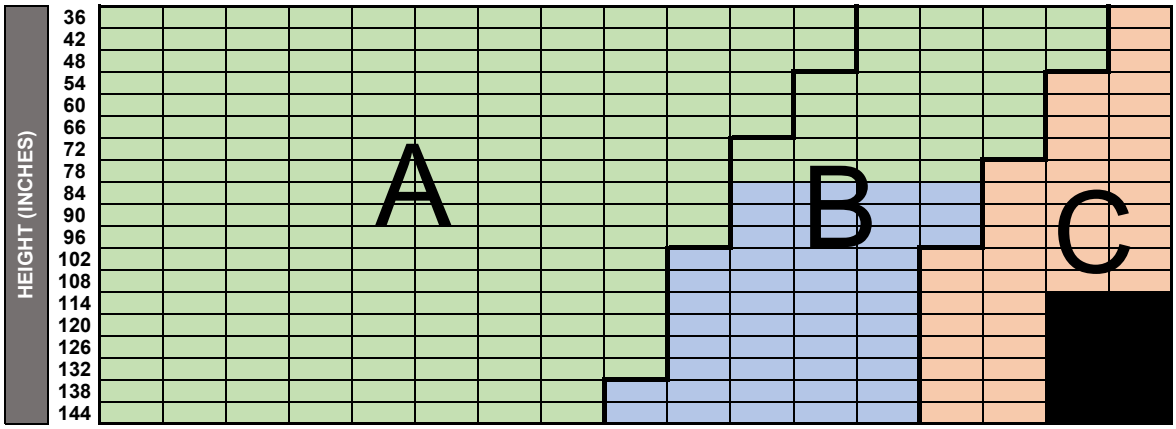


| Control Systems (Minimum height for all Control Systems is 12") | Minimium Width (Single Panel) | Minimum Height | Overall Minimium Width (2-on-1) | Specification Zone(s) |
|---|---|---|---|---|
| Continuous Cord Loop (Maximum height for 12" width is 60") | 12" | 12" | 24" | A, B & C |
| InMotion™ Wand | 21" | 12" | 43" | A & B |
| InMotion™ | 21 1/2" | 12" | 44" | A & B |


No-Drill Headrail available on InMotion™ with Medium Cassette only: Minimum Width for InMotion Wand is 22 1/2" and for InMotion Minimum Width is 22". Minimum height for both is 12". Not available at all Retailers.

| Collection Code | Collection Name | Max Width Non-Railroaded | Max Width Railroaded | Available with Seam |
|---|---|---|---|---|
| LS013 | 1% Catalina | 108" | 108" | Yes |

*Maximum width of continuous Deluxe Valance = Maximum published non-railroaded width less 8"
Maximum Width and Height for No-Drill Headrail is 84". Not available at all Retailers.

| Top Treatment | Legend | |
|---|---|---|
| Medium Cassette | | |
| Large Cassette | | |
| *Fabric Valance | | |
| Open Roll with Mounting Bar | | |

## Control System and Top Treatment Compatibility Chart - Perfect Placement™ Cordless

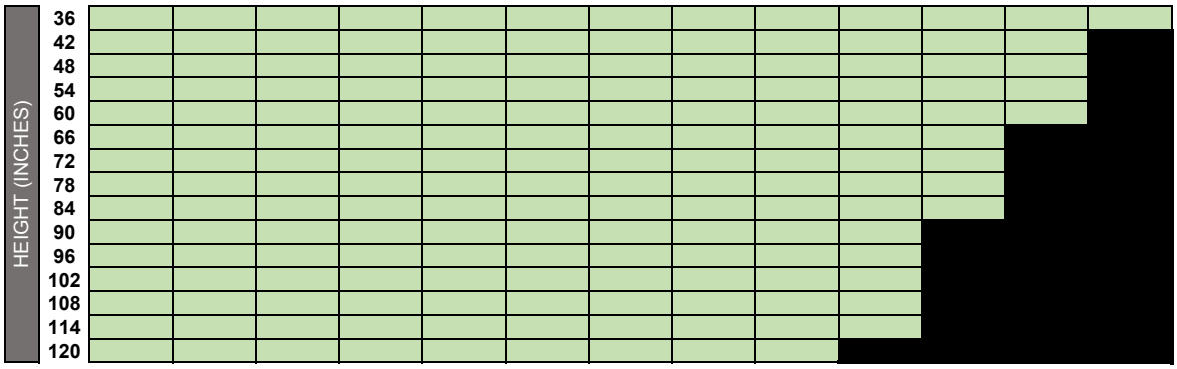


| Control Systems | Minimum Width (Single Panel) | Overall Minimum Width (2 on 1) | Minimum Height | Top Treatment |
|---|---|---|---|---|
| PerfectPlacement™ - Cordless | 18" | N/A | 24" | All |


No-Drill Headrail available on PerfectPlacement™ Cordless with Medium Cassette only: Minimum Width is 18 1/2". Minimum height is 24". Not available at all Retailers.

# PRODUCT SIZE SPECIFICATIONS

| Collection Code | Collection Name | Max Width Non-Railroaded | Max Width Railroaded | Available with Seam |
|---|---|---|---|---|
| LS010 | 1% Newport | 98" | 132" | Yes |

- Railroad Fabrics (turned width for length) will have a visible seam when fabricated longer than the maximum roll width less 16".
- **Red Box** in spec chart indicates shade sizes Heat Sealed Hem Bar for these sizes.
- Maximum width of continuous Fabric Valance = Maximum published non-railroaded width less 8"
- Maximum Width and Height for No-Drill Headrail is 84". Not available at all Retailers.

| Top Treatment | Legend | | |
|---|---|---|---|
| Medium Cassette | | | |
| Large Cassette | | | |
| Fabric Valance | | | |
| Open Roll | | | |

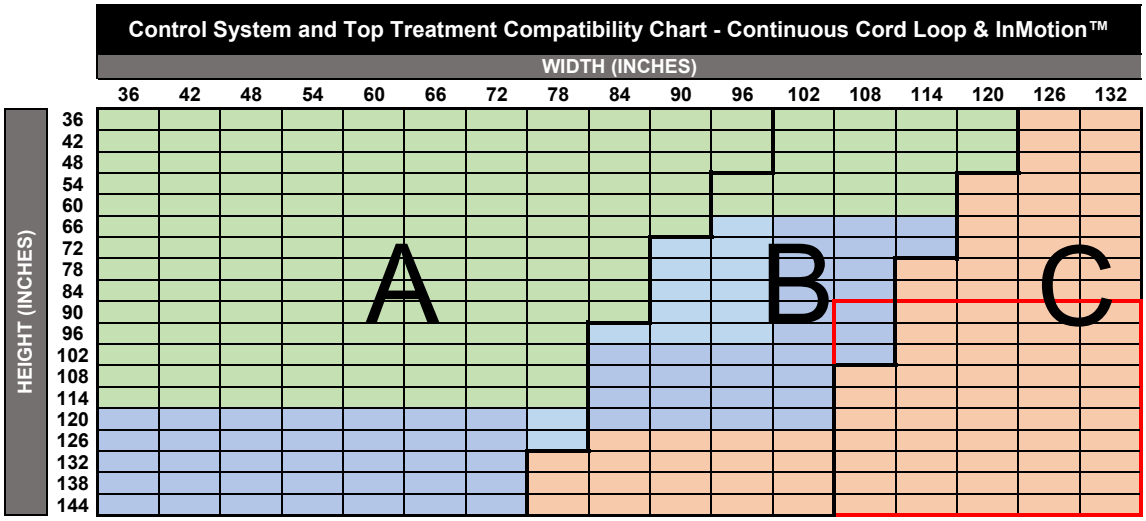



| Control Systems (Minimum height for all Control Systems is 12") | Minimum Width (Single Panel) | Minimum Height | Overall Minimum Width (2-on-1) | Specification Zone(s) |
|---|---|---|---|---|
| Continuous Cord Loop (Maximum height for 12" width is 60") | 12" | 12" | 24" | A, B & C |
| InMotion™ Wand | 21" | 12" | 43" | A & B |
| InMotion™ | 21 1/2" | 12" | 44" | A & B |

No-Drill Headrail available on InMotion™ with Medium Cassette only: Minimum Width for InMotion Wand is 22 1/2" and for InMotion Minimum Width is 22". Minimum height for both is 12". Not available at all Retailers.

| Collection Code | Collection Name | Max Width Non-Railroaded | Max Width Railroaded | Available with Seam |
|---|---|---|---|---|
| LS010 | 1% Newport | 96" | 96" | No |

*Maximum width of continuous Deluxe Valance = Maximum published non-railroaded width less 8"
Maximum Width and Height for No-Drill Headrail is 84". Not available at all Retailers.

| Top Treatment | Legend | |
|---|---|---|
| Medium Cassette | | |
| Large Cassette | | |
| *Fabric Valance | | |
| Open Roll with Mounting Bar | | |

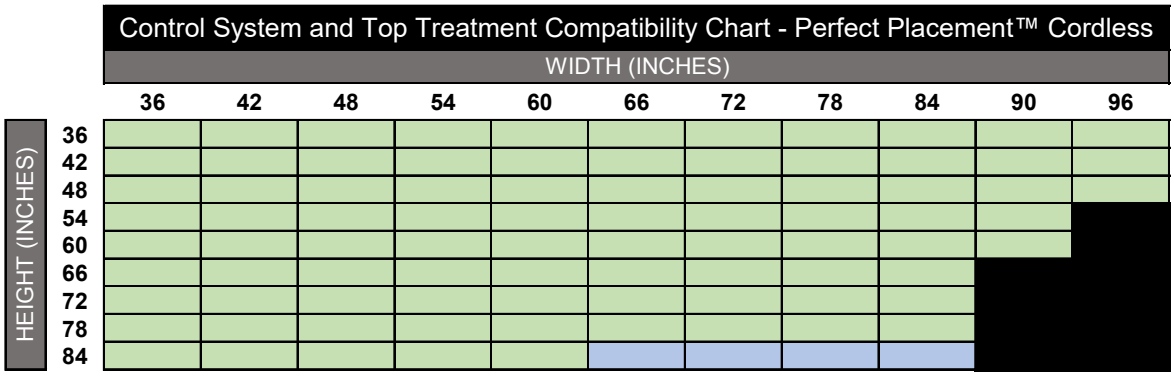


| Control Systems | Minimum Width (Single Panel) | Overall Minimum Width (2 on 1) | Minimum Height | Top Treatment |
|---|---|---|---|---|
| PerfectPlacement™ - Cordless | 18" | N/A | 24" | All |

No-Drill Headrail available on PerfectPlacement™ Cordless with Medium Cassette only: Minimum Width is 18 1/2". Minimum height is 24". Not available at all Retailers.


# PRODUCT SIZE SPECIFICATIONS

| Collection Code | Collection Name | Max Width Non-Railroaded | Max Width Railroaded | Available with Seam |
|---|---|---|---|---|
| LS049 | 1% Solapur | 118" | 132" | Yes |

- Railroad Fabrics (turned width for length) will have a visible seam when fabricated longer than the maximum roll width less 16".
- **Red Box** in spec chart indicates shade sizes Heat Sealed Hem Bar for these sizes.
- Maximum width of continuous Fabric Valance = Maximum published non-railroaded width less 8"
- Maximum Width and Height for No-Drill Headrail is 84". Not available at all Retailers.

| Top Treatment | Legend | | |
|---|---|---|---|
| Medium Cassette | | | |
| Large Cassette | | | |
| Fabric Valance | | | |
| Open Roll | | | |

## Control System and Top Treatment Compatibility Chart - Continuous Cord Loop & InMotion™

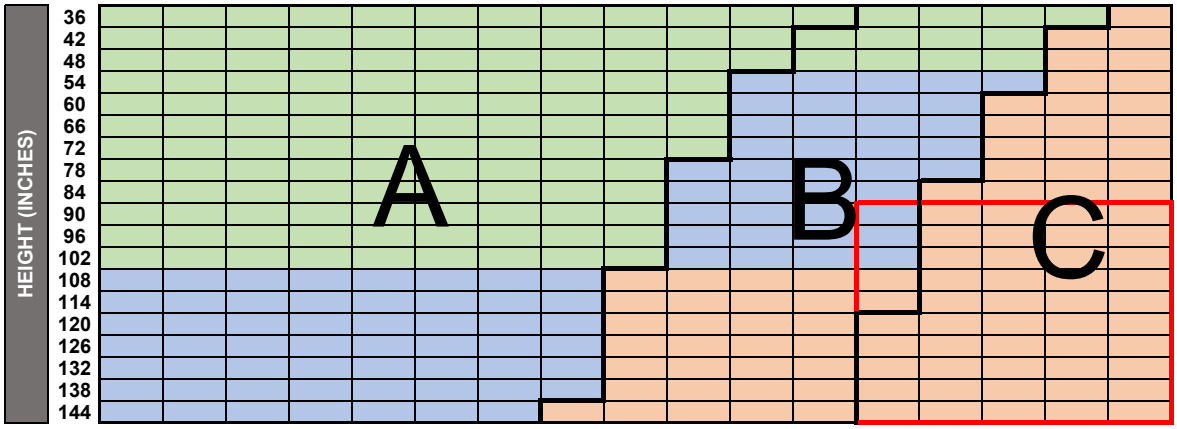


| Control Systems (Minimum height for all Control Systems is 12") | Minimium Width (Single Panel) | Minimum Height | Overall Minimium Width (2-on-1) | Specification Zone(s) |
|---|---|---|---|---|
| Continuous Cord Loop (Maximum height for 12" width is 60") | 12" | 12" | 24" | A, B & C |
| InMotion™ Wand | 21" | 12" | 43" | A & B |
| InMotion™ | 21 1/2" | 12" | 44" | A & B |


No-Drill Headrail available on InMotion™ with Medium Cassette only: Minimum Width for InMotion Wand is 22 1/2" and for InMotion Minimum Width is 22". Minimum height for both is 12". Not available at all Retailers.

| Collection Code | Collection Name | Max Width Non-Railroaded | Max Width Railroaded | Available with Seam |
|---|---|---|---|---|
| LS049 | 1% Solapur | 102" | 102" | No |

*Maximum width of continuous Deluxe Valance = Maximum published non-railroaded width less 8"
Maximum Width and Height for No-Drill Headrail is 84". Not available at all Retailers.

| Top Treatment | Legend | |
|---|---|---|
| Medium Cassette | | |
| Large Cassette | | |
| *Fabric Valance | | |
| Open Roll with Mounting Bar | | |

## Control System and Top Treatment Compatibility Chart - Perfect Placement™ Cordless

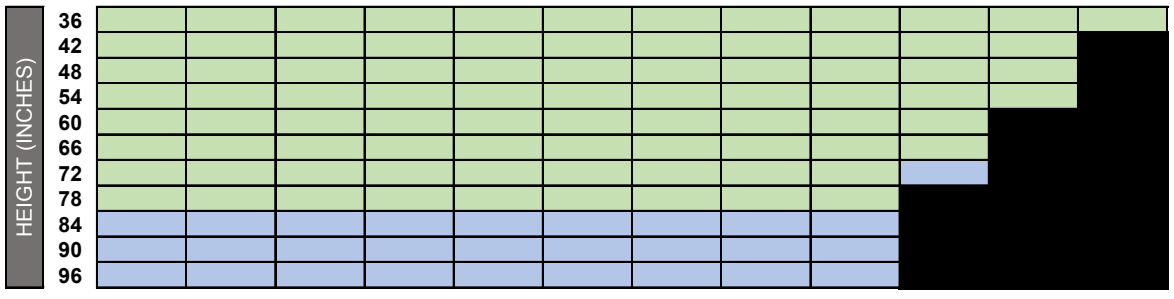


| Control Systems | Minimum Width (Single Panel) | Overall Minimum Width (2 on 1) | Minimum Height | Top Treatment |
|---|---|---|---|---|
| PerfectPlacement™ - Cordless | 18" | N/A | 24" | All |

No-Drill Headrail available on PerfectPlacement™ Cordless with Medium Cassette only: Minimum Width is 18 1/2". Minimum height is 24". Not available at all Retailers.


# PRODUCT SIZE SPECIFICATIONS

| Collection Code | Collection Name | Max Width Non-Railroaded | Max Width Railroaded | Available with Seam |
|---|---|---|---|---|
| LS008 | 3% Acadia | 118" | N/A | No |

- Railroad Fabrics (turned width for length) will have a visible seam when fabricated longer than the maximum roll width less 16".
- **Red Box** in spec chart indicates shade sizes Heat Sealed Hem Bar for these sizes.
- Maximum width of continuous Fabric Valance = Maximum published non-railroaded width less 8"
- Maximum Width and Height for No-Drill Headrail is 84". Not available at all Retailers.

| Top Treatment | Legend | | |
|---|---|---|---|
| Medium Cassette | | | |
| Large Cassette | | | |
| Fabric Valance | | | |
| Open Roll | | | |

## Control System and Top Treatment Compatibility Chart - Continuous Cord Loop & InMotion™

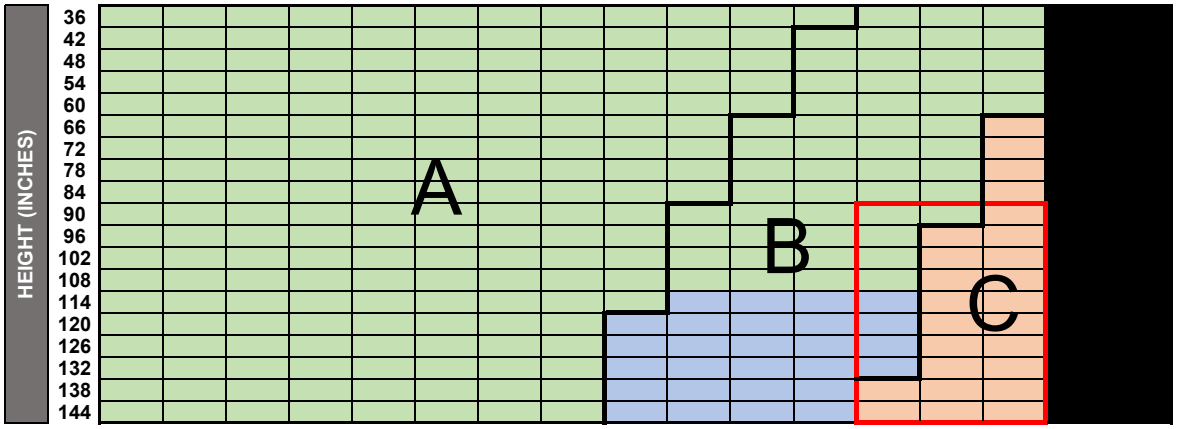


| Control Systems (Minimum height for all Control Systems is 12") | Minimium Width (Single Panel) | Minimum Height | Overall Minimium Width (2-on-1) | Specification Zone(s) |
|---|---|---|---|---|
| Continuous Cord Loop (Maximum height for 12" width is 60") | 12" | 12" | 24" | A, B & C |
| InMotion™ Wand | 21" | 12" | 43" | A & B |
| InMotion™ | 21 1/2" | 12" | 44" | A & B |


No-Drill Headrail available on InMotion™ with Medium Cassette only: Minimum Width for InMotion Wand is 22 1/2" and for InMotion Minimum Width is 22". Minimum height for both is 12". Not available at all Retailers.

| Collection Code | Collection Name | Max Width Non-Railroaded | Max Width Railroaded | Available with Seam |
|---|---|---|---|---|
| LS008 | 3% Acadia | 108" | N/A | No |

*Maximum width of continuous Deluxe Valance = Maximum published non-railroaded width less 8"
Maximum Width and Height for No-Drill Headrail is 84". Not available at all Retailers.

| Top Treatment | Legend | |
|---|---|---|
| Medium Cassette | | |
| Large Cassette | | |
| *Fabric Valance | | |
| Open Roll with Mounting Bar | | |

## Control System and Top Treatment Compatibility Chart - Perfect Placement™ Cordless

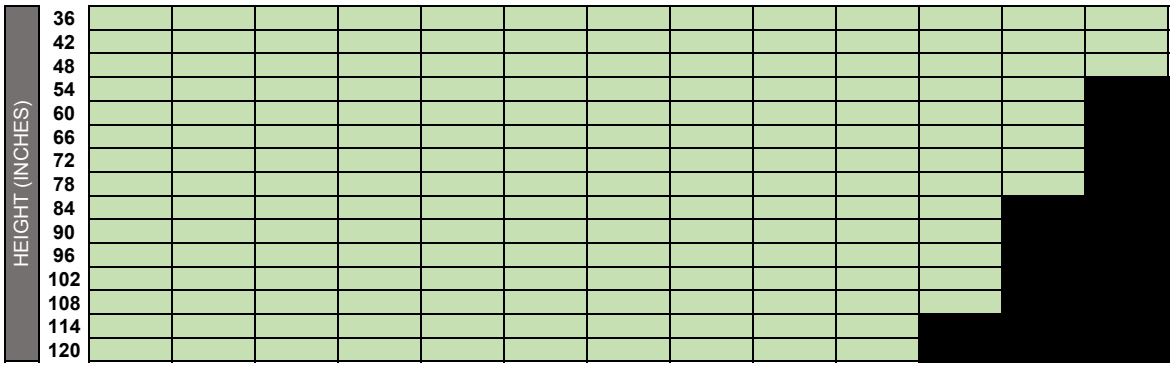


| Control Systems | Minimum Width (Single Panel) | Overall Minimum Width (2 on 1) | Minimum Height | Top Treatment |
|---|---|---|---|---|
| PerfectPlacement™ - Cordless | 18" | N/A | 24" | All |

No-Drill Headrail available on PerfectPlacement™ Cordless with Medium Cassette only: Minimum Width is 18 1/2". Minimum height is 24". Not available at all Retailers.


# PRODUCT SIZE SPECIFICATIONS

| Collection Code | Collection Name | Max Width Non-Railroaded | Max Width Railroaded | Available with Seam |
|---|---|---|---|---|
| LS014 | 3% Catalina | 118" | 132" | No |

- Railroad Fabrics (turned width for length) will have a visible seam when fabricated longer than the maximum roll width less 16".
- **Red Box** in spec chart indicates shade sizes Heat Sealed Hem Bar for these sizes.
- Maximum width of continuous Fabric Valance = Maximum published non-railroaded width less 8"
- Maximum Width and Height for No-Drill Headrail is 84". Not available at all Retailers.

| Top Treatment | Legend | | |
|---|---|---|---|
| Medium Cassette | | | |
| Large Cassette | | | |
| Fabric Valance | | | |
| Open Roll | | | |

## Control System and Top Treatment Compatibility Chart - Continuous Cord Loop & InMotion™

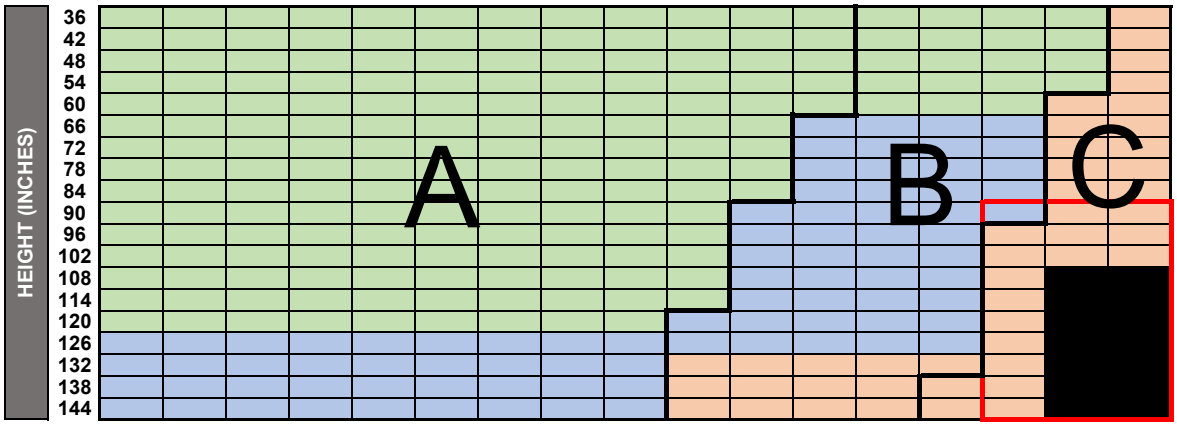


| Control Systems (Minimum height for all Control Systems is 12") | Minimum Width (Single Panel) | Minimum Height | Overall Minimum Width (2-on-1) | Specification Zone(s) |
|---|---|---|---|---|
| Continuous Cord Loop (Maximum height for 12" width is 60") | 12" | 12" | 24" | A, B & C |
| InMotion™ Wand | 21" | 12" | 43" | A & B |
| InMotion™ | 21 1/2" | 12" | 44" | A & B |


No-Drill Headrail available on InMotion™ with Medium Cassette only: Minimum Width for InMotion Wand is 22 1/2" and for InMotion Minimum Width is 22". Minimum height for both is 12". Not available at all Retailers.

| Collection Code | Collection Name | Max Width Non-Railroaded | Max Width Railroaded | Available with Seam |
|---|---|---|---|---|
| LS014 | 3% Catalina | 108" | 108" | Yes |

*Maximum width of continuous Deluxe Valance = Maximum published non-railroaded width less 8"
Maximum Width and Height for No-Drill Headrail is 84". Not available at all Retailers.

| Top Treatment | Legend | |
|---|---|---|
| Medium Cassette | | |
| Large Cassette | | |
| *Fabric Valance | | |
| Open Roll with Mounting Bar | | |

## Control System and Top Treatment Compatibility Chart - Perfect Placement™ Cordless

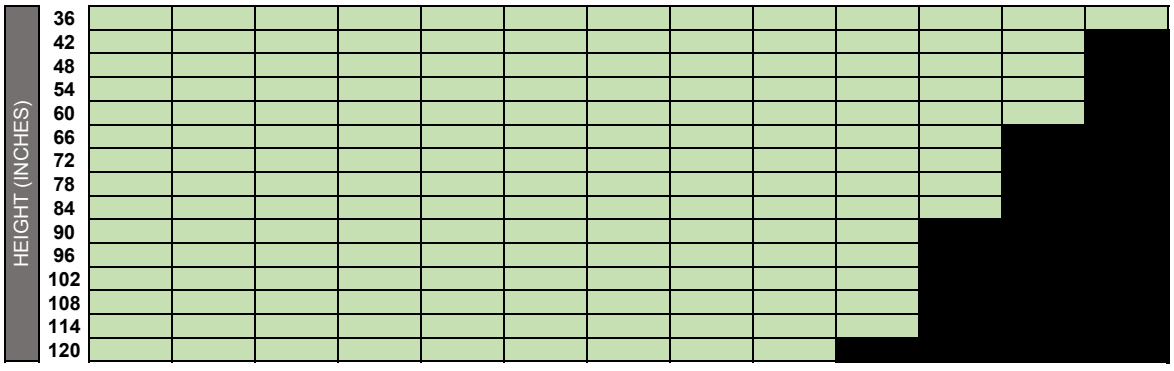


| Control Systems | Minimum Width (Single Panel) | Overall Minimum Width (2 on 1) | Minimum Height | Top Treatment |
|---|---|---|---|---|
| PerfectPlacement™ - Cordless | 18" | N/A | 24" | All |

No-Drill Headrail available on PerfectPlacement™ Cordless with Medium Cassette only: Minimum Width is 18 1/2". Minimum height is 24". Not available at all Retailers.


# PRODUCT SIZE SPECIFICATIONS

| Collection Code | Collection Name | Max Width Non-Railroaded | Max Width Railroaded | Available with Seam |
|---|---|---|---|---|
| LS006 | 3% Malibu | 118" | 132" | Yes |

- Railroad Fabrics (turned width for length) will have a visible seam when fabricated longer than the maximum roll width less 16".
- **Red Box** in spec chart indicates shade sizes Heat Sealed Hem Bar for these sizes.
- Maximum width of continuous Fabric Valance = Maximum published non-railroaded width less 8"
- Maximum Width and Height for No-Drill Headrail is 84". Not available at all Retailers.

| Top Treatment | Legend | | |
|---|---|---|---|
| Medium Cassette | | | |
| Large Cassette | | | |
| Fabric Valance | | | |
| Open Roll | | | |

## Control System and Top Treatment Compatibility Chart - Continuous Cord Loop & InMotion™

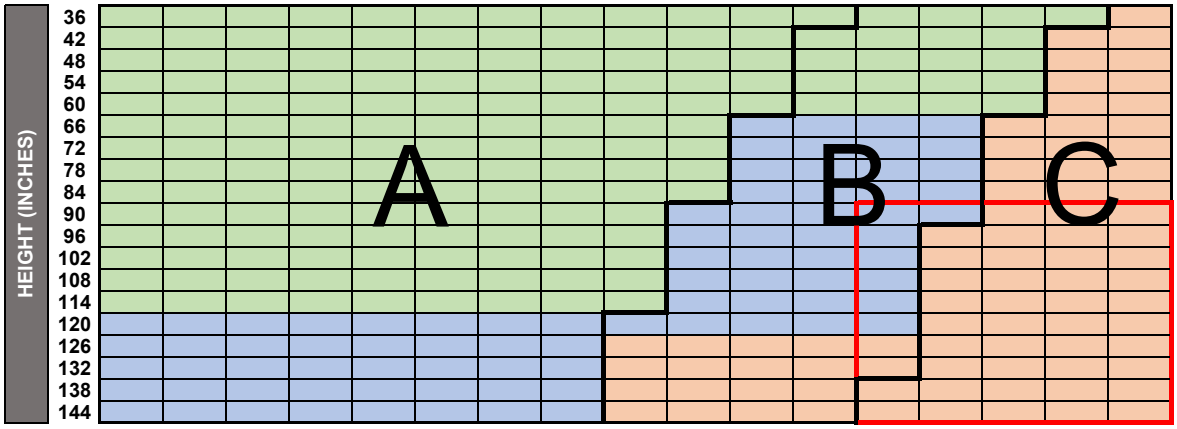


| Control Systems (Minimum height for all Control Systems is 12") | Minimum Width (Single Panel) | Minimum Height | Overall Minimum Width (2-on-1) | Specification Zone(s) |
|---|---|---|---|---|
| Continuous Cord Loop (Maximum height for 12" width is 60") | 12" | 12" | 24" | A, B & C |
| InMotion™ Wand | 21" | 12" | 43" | A & B |
| InMotion™ | 21 1/2" | 12" | 44" | A & B |


No-Drill Headrail available on InMotion™ with Medium Cassette only: Minimum Width for InMotion Wand is 22 1/2" and for InMotion Minimum Width is 22". Minimum height for both is 12". Not available at all Retailers.

| Collection Code | Collection Name | Max Width Non-Railroaded | Max Width Railroaded | Available with Seam |
|---|---|---|---|---|
| LS006 | 3% Malibu | 102" | 102" | No |

*Maximum width of continuous Deluxe Valance = Maximum published non-railroaded width less 8"
Maximum Width and Height for No-Drill Headrail is 84". Not available at all Retailers.

| Top Treatment | Legend | |
|---|---|---|
| Medium Cassette | | |
| Large Cassette | | |
| *Fabric Valance | | |
| Open Roll with Mounting Bar | | |

## Control System and Top Treatment Compatibility Chart - Perfect Placement™ Cordless

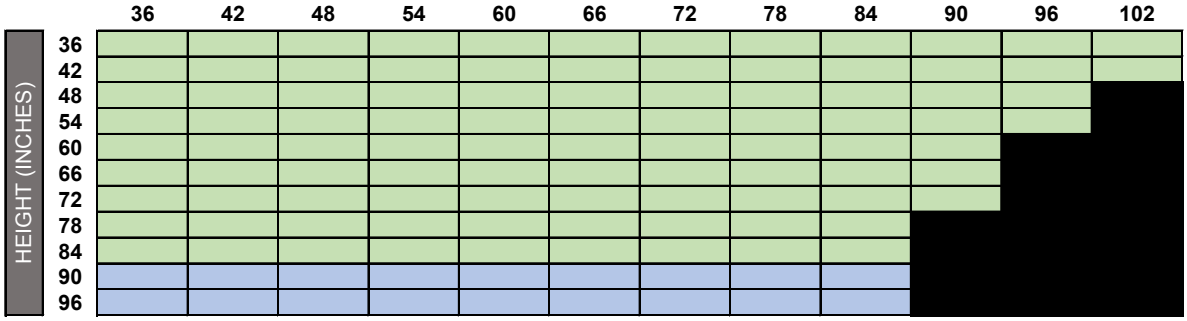


| Control Systems | Minimum Width (Single Panel) | Overall Minimum Width (2 on 1) | Minimum Height | Top Treatment |
|---|---|---|---|---|
| PerfectPlacement™ - Cordless | 18" | N/A | 24" | All |

No-Drill Headrail available on PerfectPlacement™ Cordless with Medium Cassette only: Minimum Width is 18 1/2". Minimum height is 24". Not available at all Retailers.


# PRODUCT SIZE SPECIFICATIONS

| Collection Code | Collection Name | Max Width Non-Railroaded | Max Width Railroaded | Available with Seam |
|---|---|---|---|---|
| LS011 | 3% Newport | 98" | 132" | Yes |

- Railroad Fabrics (turned width for length) will have a visible seam when fabricated longer than the maximum roll width less 16".
- **Red Box** in spec chart indicates shade sizes Heat Sealed Hem Bar for these sizes.
- Maximum width of continuous Fabric Valance = Maximum published non-railroaded width less 8"
- Maximum Width and Height for No-Drill Headrail is 84". Not available at all Retailers.

| Top Treatment | Legend | | |
|---|---|---|---|
| Medium Cassette | | | |
| Large Cassette | | | |
| Fabric Valance | | | |
| Open Roll | | | |

## Control System and Top Treatment Compatibility Chart - Continuous Cord Loop & InMotion™

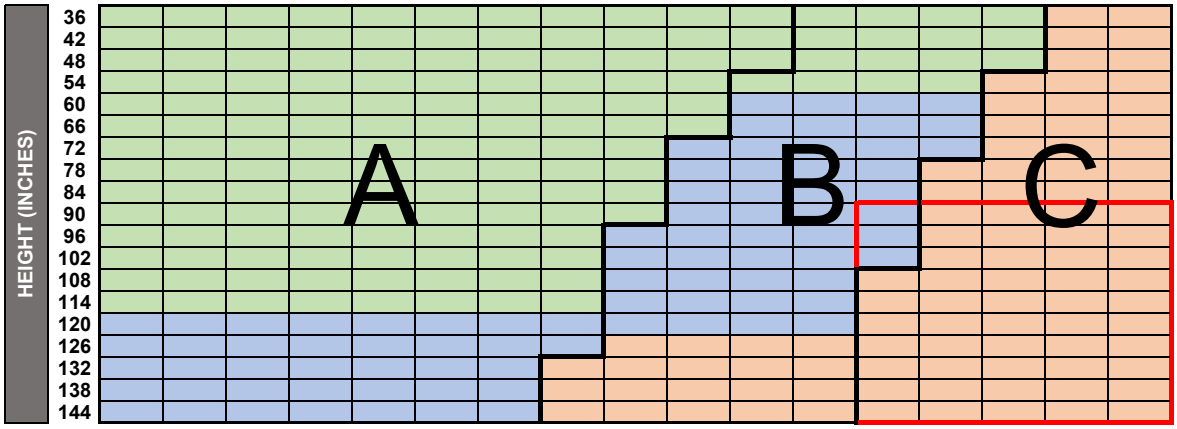


| Control Systems (Minimum height for all Control Systems is 12") | Minimium Width (Single Panel) | Minimum Height | Overall Minimium Width (2-on-1) | Specification Zone(s) |
|---|---|---|---|---|
| Continuous Cord Loop (Maximum height for 12" width is 60") | 12" | 12" | 24" | A, B & C |
| InMotion™ Wand | 21" | 12" | 43" | A & B |
| InMotion™ | 21 1/2" | 12" | 44" | A & B |


No-Drill Headrail available on InMotion™ with Medium Cassette only: Minimum Width for InMotion Wand is 22 1/2" and for InMotion Minimum Width is 22". Minimum height for both is 12". Not available at all Retailers.

| Collection Code | Collection Name | Max Width Non-Railroaded | Max Width Railroaded | Available with Seam |
|---|---|---|---|---|
| LS011 | 3% Newport | 98" | 102" | Yes |

*Maximum width of continuous Deluxe Valance = Maximum published non-railroaded width less 8"
Maximum Width and Height for No-Drill Headrail is 84". Not available at all Retailers.

| Top Treatment | Legend | |
|---|---|---|
| Medium Cassette | | |
| Large Cassette | | |
| *Fabric Valance | | |
| Open Roll with Mounting Bar | | |

## Control System and Top Treatment Compatibility Chart - Perfect Placement™ Cordless

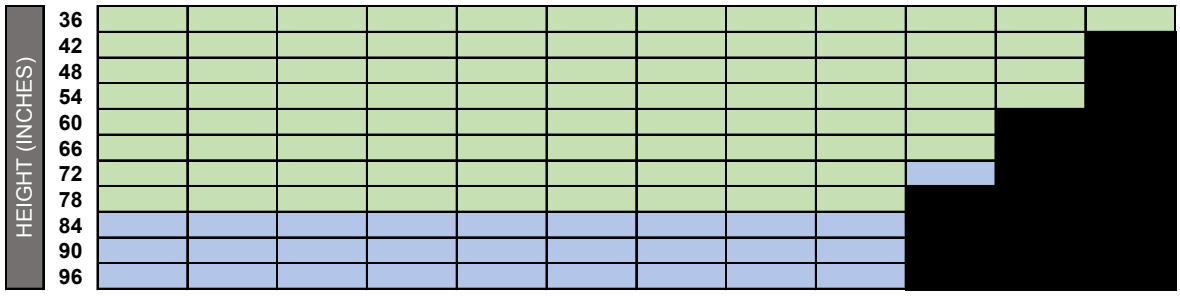


| Control Systems | Minimum Width (Single Panel) | Overall Minimum Width (2 on 1) | Minimum Height | Top Treatment |
|---|---|---|---|---|
| PerfectPlacement™ - Cordless | 18" | N/A | 24" | All |

No-Drill Headrail available on PerfectPlacement™ Cordless with Medium Cassette only: Minimum Width is 18 1/2". Minimum height is 24". Not available at all Retailers.


# PRODUCT SIZE SPECIFICATIONS

| Collection Code | Collection Name | Max Width Non-Railroaded | Max Width Railroaded | Available with Seam |
|---|---|---|---|---|
| LS026 | 3% Barcelona | 113" | N/A | No |
| LS027 | 3% Providence | 113" | N/A | No |
| LS050 | 3% Revival | 113" | N/A | No |
| LS028 | 3% Shangrila | 113" | N/A | No |
| LS048 | 3% Solapur | 118" | 132" | Yes |
| LS045 | 3% Stonewash | 113" | N/A | No |

| Top Treatment | Legend | | |
|---|---|---|---|
| Medium Cassette | | | |
| Large Cassette | | | |
| Fabric Valance | | | |
| Open Roll | | | |

- Railroad Fabrics (turned width for length) will have a visible seam when fabricated longer than the maximum roll width less 16".
- **Red Box** in spec chart indicates shade sizes Heat Sealed Hem Bar for these sizes.
- Maximum width of continuous Fabric Valance = Maximum published non-railroaded width less 8"
- Maximum Width and Height for No-Drill Headrail is 84". Not available at all Retailers.

## Control System and Top Treatment Compatibility Chart - Continuous Cord Loop & InMotion™

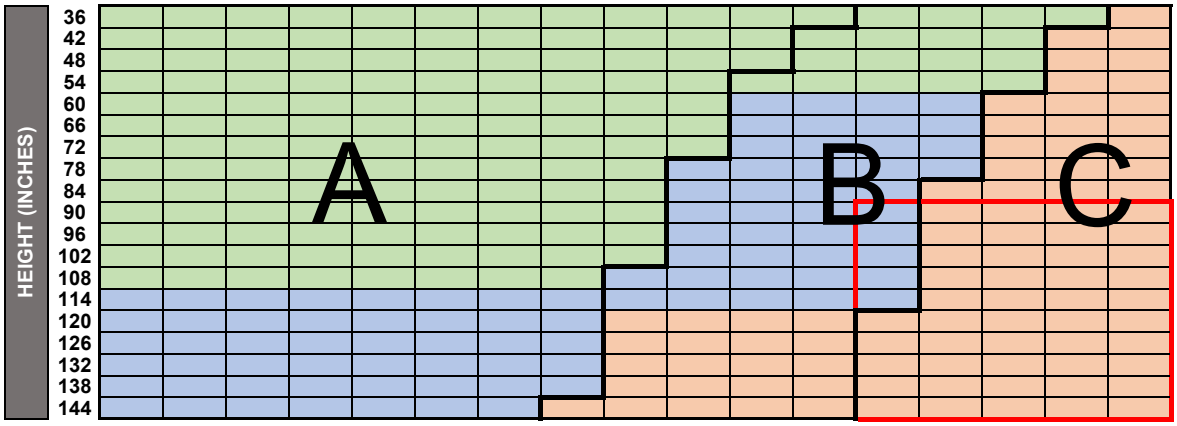


| Control Systems (Minimum height for all Control Systems is 12") | Minimium Width (Single Panel) | Minimum Height | Overall Minimium Width (2-on-1) | Specification Zone(s) |
|---|---|---|---|---|
| Continuous Cord Loop (Maximum height for 12" width is 60") | 12" | 12" | 24" | A, B & C |
| InMotion™ Wand | 21" | 12" | 43" | A & B |
| InMotion™ | 21 1/2" | 12" | 44" | A & B |


No-Drill Headrail available on InMotion™ with Medium Cassette only: Minimum Width for InMotion Wand is 22 1/2" and for InMotion Minimum Width is 22". Minimum height for both is 12". Not available at all Retailers.

| Collection Code | Collection Name | Max Width Non-Railroaded | Max Width Railroaded | Available with Seam |
|---|---|---|---|---|
| LS026 | 3% Barcelona | 102" | N/A | No |
| LS027 | 3% Providence | 102" | N/A | No |
| LS050 | 3% Revival | 102" | 102" | No |
| LS028 | 3% Shangrila | 102" | N/A | No |
| LS048 | 3% Solapur | 102" | 102" | No |
| LS045 | 3% Stonewash | 102" | 102" | No |

| Top Treatment | Legend | |
|---|---|---|
| Medium Cassette | | |
| Large Cassette | | |
| *Fabric Valance | | |
| Open Roll with Mounting Bar | | |

*Maximum width of continuous Deluxe Valance = Maximum published non-railroaded width less 8"
Maximum Width and Height for No-Drill Headrail is 84". Not available at all Retailers.

## Control System and Top Treatment Compatibility Chart - Perfect Placement™ Cordless

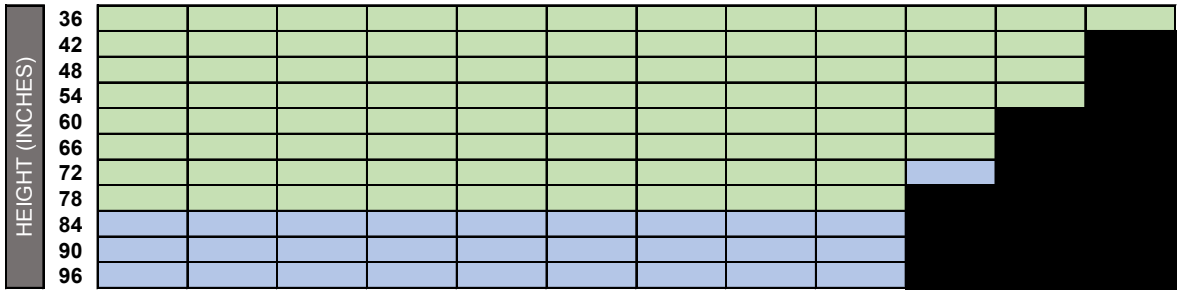


| Control Systems | Minimum Width (Single Panel) | Overall Minimum Width (2 on 1) | Minimum Height | Top Treatment |
|---|---|---|---|---|
| PerfectPlacement™ - Cordless | 18" | N/A | 24" | All |

No-Drill Headrail available on PerfectPlacement™ Cordless with Medium Cassette only: Minimum Width is 18 1/2". Minimum height is 24". Not available at all Retailers.


# PRODUCT SIZE SPECIFICATIONS

| Collection Code | Collection Name | Max Width Non-Railroaded | Max Width Railroaded | Available with Seam |
|---|---|---|---|---|
| LS009 | 5% Acadia | 118" | N/A | No |

- Railroad Fabrics (turned width for length) will have a visible seam when fabricated longer than the maximum roll width less 16".
- **Red Box** in spec chart indicates shade sizes Heat Sealed Hem Bar for these sizes.
- Maximum width of continuous Fabric Valance = Maximum published non-railroaded width less 8"
- Maximum Width and Height for No-Drill Headrail is 84". Not available at all Retailers.

| Top Treatment | Legend | | |
|---|---|---|---|
| Medium Cassette | | | |
| Large Cassette | | | |
| Fabric Valance | | | |
| Open Roll | | | |

## Control System and Top Treatment Compatibility Chart - Continuous Cord Loop & InMotion™

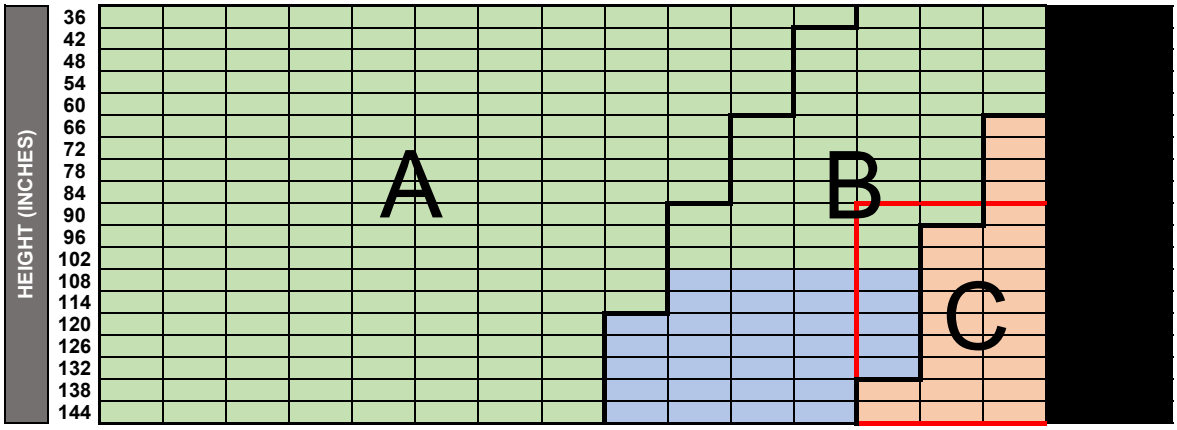


| Control Systems (Minimum height for all Control Systems is 12") | Minimium Width (Single Panel) | Minimum Height | Overall Minimium Width (2-on-1) | Specification Zone(s) |
|---|---|---|---|---|
| Continuous Cord Loop (Maximum height for 12" width is 60") | 12" | 12" | 24" | A, B & C |
| InMotion™ Wand | 21" | 12" | 43" | A & B |
| InMotion™ | 21 1/2" | 12" | 44" | A & B |


No-Drill Headrail available on InMotion™ with Medium Cassette only: Minimum Width for InMotion Wand is 22 1/2" and for InMotion Minimum Width is 22". Minimum height for both is 12". Not available at all Retailers.

| Collection Code | Collection Name | Max Width Non-Railroaded | Max Width Railroaded | Available with Seam |
|---|---|---|---|---|
| LS009 | 5% Acadia | 108" | N/A | No |

*Maximum width of continuous Deluxe Valance = Maximum published non-railroaded width less 8"
Maximum Width and Height for No-Drill Headrail is 84". Not available at all Retailers.

| Top Treatment | Legend | |
|---|---|---|
| Medium Cassette | | |
| Large Cassette | | |
| *Fabric Valance | | |
| Open Roll with Mounting Bar | | |

## Control System and Top Treatment Compatibility Chart - Perfect Placement™ Cordless

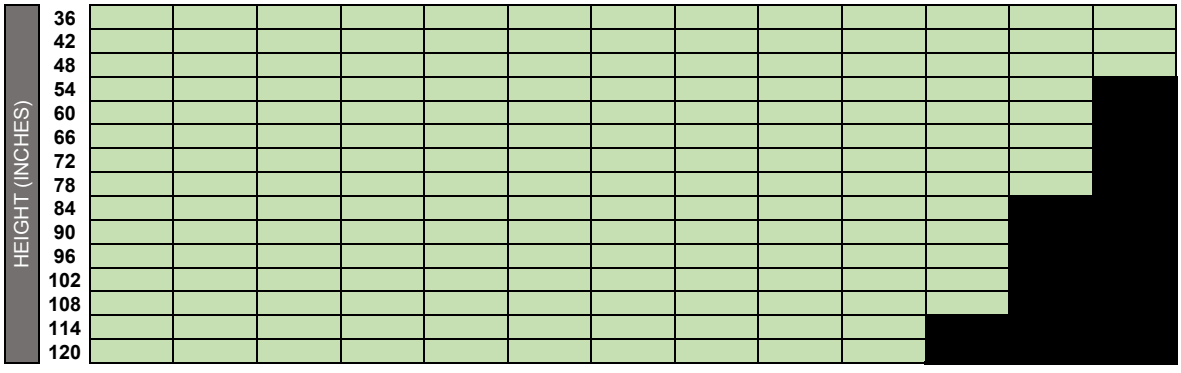


| Control Systems | Minimum Width (Single Panel) | Overall Minimum Width (2 on 1) | Minimum Height | Top Treatment |
|---|---|---|---|---|
| PerfectPlacement™ - Cordless | 18" | N/A | 24" | All |

No-Drill Headrail available on PerfectPlacement™ Cordless with Medium Cassette only: Minimum Width is 18 1/2". Minimum height is 24". Not available at all Retailers.


# PRODUCT SIZE SPECIFICATIONS

| Collection Code | Collection Name | Max Width Non-Railroaded | Max Width Railroaded | Available with Seam |
|---|---|---|---|---|
| LS015 | 5% Catalina | 118" | 132" | No |

- Railroad Fabrics (turned width for length) will have a visible seam when fabricated longer than the maximum roll width less 16".
- **Red Box** in spec chart indicates shade sizes Heat Sealed Hem Bar for these sizes.
- Maximum width of continuous Fabric Valance = Maximum published non-railroaded width less 8"
- Maximum Width and Height for No-Drill Headrail is 84". Not available at all Retailers.

| Top Treatment | Legend | | |
|---|---|---|---|
| Medium Cassette | | | |
| Large Cassette | | | |
| Fabric Valance | | | |
| Open Roll | | | |

## Control System and Top Treatment Compatibility Chart - Continuous Cord Loop & InMotion™

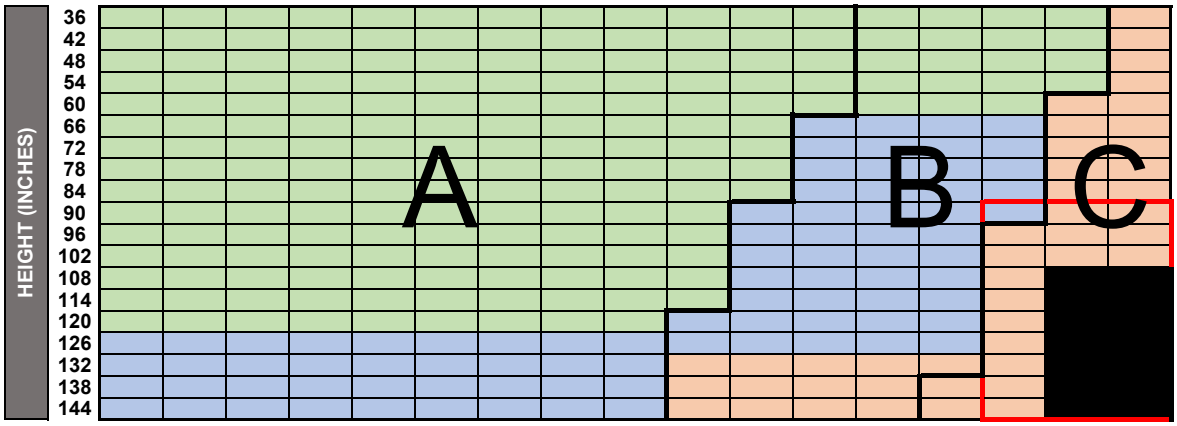


| Control Systems (Minimum height for all Control Systems is 12") | Minimium Width (Single Panel) | Minimum Height | Overall Minimium Width (2-on-1) | Specification Zone(s) |
|---|---|---|---|---|
| Continuous Cord Loop (Maximum height for 12" width is 60") | 12" | 12" | 24" | A, B & C |
| InMotion™ Wand | 21" | 12" | 43" | A & B |
| InMotion™ | 21 1/2" | 12" | 44" | A & B |


No-Drill Headrail available on InMotion™ with Medium Cassette only: Minimum Width for InMotion Wand is 22 1/2" and for InMotion Minimum Width is 22". Minimum height for both is 12". Not available at all Retailers.

| Collection Code | Collection Name | Max Width Non-Railroaded | Max Width Railroaded | Available with Seam |
|---|---|---|---|---|
| LS015 | 5% Catalina | 108" | 108" | Yes |

*Maximum width of continuous Deluxe Valance = Maximum published non-railroaded width less 8"
Maximum Width and Height for No-Drill Headrail is 84". Not available at all Retailers.

| Top Treatment | Legend | |
|---|---|---|
| Medium Cassette | | |
| Large Cassette | | |
| *Fabric Valance | | |
| Open Roll with Mounting Bar | | |

## Control System and Top Treatment Compatibility Chart - Perfect Placement™ Cordless

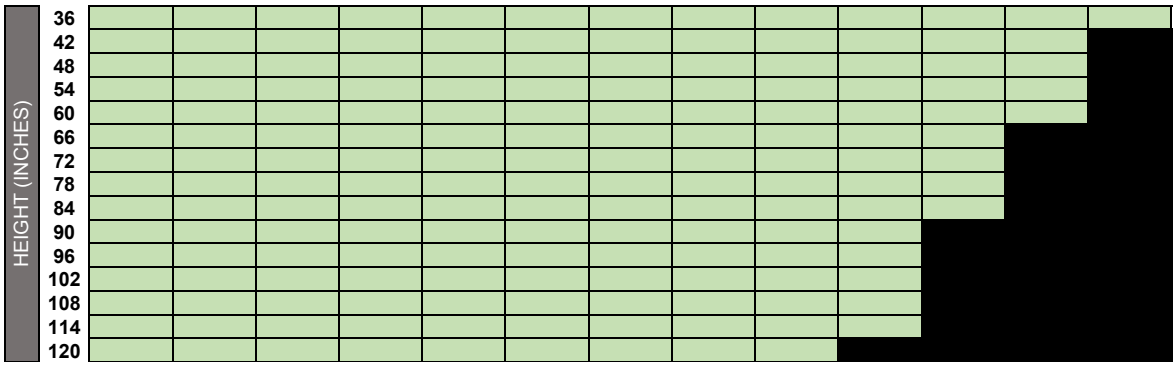


| Control Systems | Minimum Width (Single Panel) | Overall Minimum Width (2 on 1) | Minimum Height | Top Treatment |
|---|---|---|---|---|
| PerfectPlacement™ - Cordless | 18" | N/A | 24" | All |

No-Drill Headrail available on PerfectPlacement™ Cordless with Medium Cassette only: Minimum Width is 18 1/2". Minimum height is 24". Not available at all Retailers.


# PRODUCT SIZE SPECIFICATIONS

| Collection Code | Collection Name | Max Width Non-Railroaded | Max Width Railroaded | Available with Seam |
|---|---|---|---|---|
| LS005 | 5% Key West | 118" | 132" | Yes |

- Railroad Fabrics (turned width for length) will have a visible seam when fabricated longer than the maximum roll width less 16".
- **Red Box** in spec chart indicates shade sizes Heat Sealed Hem Bar for these sizes.
- Maximum width of continuous Fabric Valance = Maximum published non-railroaded width less 8"
- Maximum Width and Height for No-Drill Headrail is 84". Not available at all Retailers.

| Top Treatment | Legend | | |
|---|---|---|---|
| Medium Cassette | | | |
| Large Cassette | | | |
| Fabric Valance | | | |
| Open Roll | | | |

## Control System and Top Treatment Compatibility Chart - Continuous Cord Loop & InMotion™

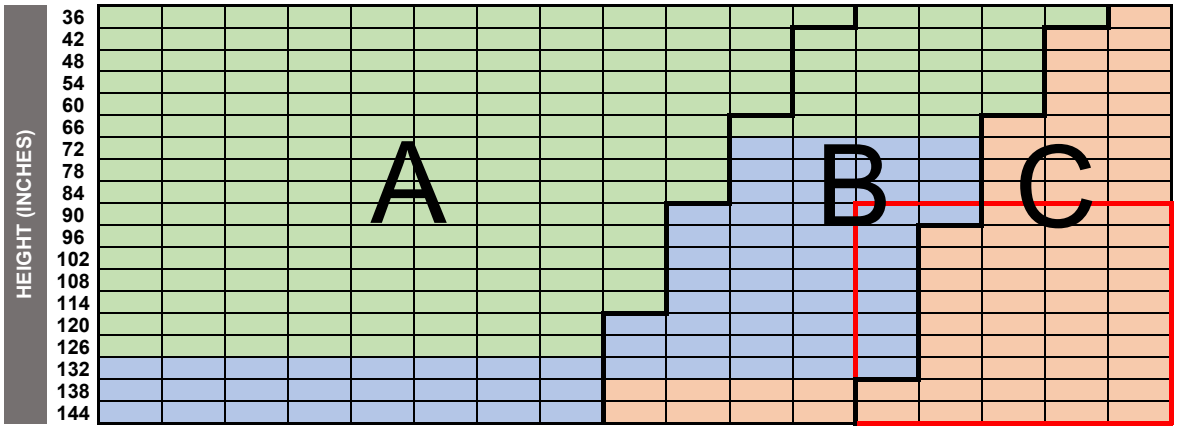


| Control Systems (Minimum height for all Control Systems is 12") | Minimium Width (Single Panel) | Minimum Height | Overall Minimium Width (2-on-1) | Specification Zone(s) |
|---|---|---|---|---|
| Continuous Cord Loop (Maximum height for 12" width is 60") | 12" | 12" | 24" | A, B & C |
| InMotion™ Wand | 21" | 12" | 43" | A & B |
| InMotion™ | 21 1/2" | 12" | 44" | A & B |


No-Drill Headrail available on InMotion™ with Medium Cassette only: Minimum Width for InMotion Wand is 22 1/2" and for InMotion Minimum Width is 22". Minimum height for both is 12". Not available at all Retailers.

| Collection Code | Collection Name | Max Width Non-Railroaded | Max Width Railroaded | Available with Seam |
|---|---|---|---|---|
| LS005 | 5% Key West | 102" | 102" | Yes |

*Maximum width of continuous Deluxe Valance = Maximum published non-railroaded width less 8"
Maximum Width and Height for No-Drill Headrail is 84". Not available at all Retailers.

| Top Treatment | Legend | |
|---|---|---|
| Medium Cassette | | |
| Large Cassette | | |
| *Fabric Valance | | |
| Open Roll with Mounting Bar | | |

## Control System and Top Treatment Compatibility Chart - Perfect Placement™ Cordless

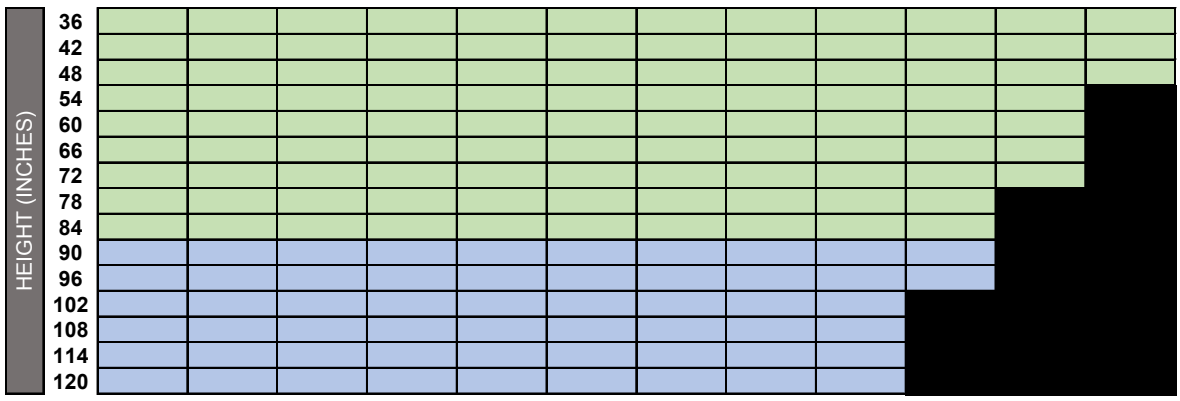


| Control Systems | Minimum Width (Single Panel) | Overall Minimum Width (2 on 1) | Minimum Height | Top Treatment |
|---|---|---|---|---|
| PerfectPlacement™ - Cordless | 18" | N/A | 24" | All |


No-Drill Headrail available on PerfectPlacement™ Cordless with Medium Cassette only: Minimum Width is 18 1/2". Minimum height is 24". Not available at all Retailers.

# PRODUCT SIZE SPECIFICATIONS

| Collection Code | Collection Name | Max Width Non-Railroaded | Max Width Railroaded | Available with Seam |
|---|---|---|---|---|
| LS012 | 5% Newport | 98" | 132" | Yes |

- Railroad Fabrics (turned width for length) will have a visible seam when fabricated longer than the maximum roll width less 16".
- **Red Box** in spec chart indicates shade sizes Heat Sealed Hem Bar for these sizes.
- Maximum width of continuous Fabric Valance = Maximum published non-railroaded width less 8"
- Maximum Width and Height for No-Drill Headrail is 84". Not available at all Retailers.

| Top Treatment | Legend | | |
|---|---|---|---|
| Medium Cassette | | | |
| Large Cassette | | | |
| Fabric Valance | | | |
| Open Roll | | | |

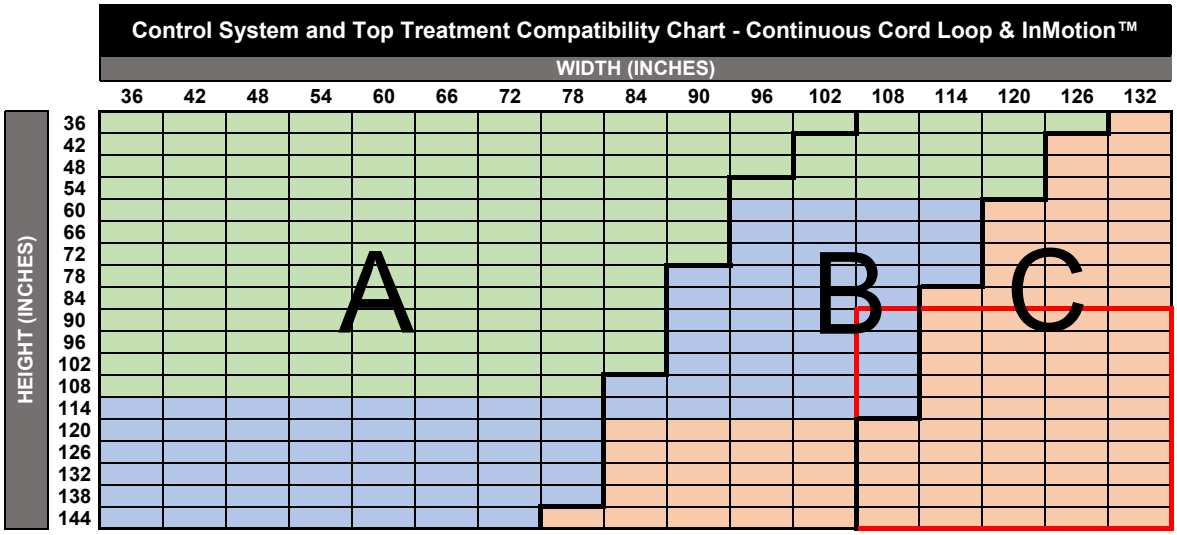



| Control Systems (Minimum height for all Control Systems is 12") | Minimum Width (Single Panel) | Minimum Height | Overall Minimum Width (2-on-1) | Specification Zone(s) |
|---|---|---|---|---|
| Continuous Cord Loop (Maximum height for 12" width is 60") | 12" | 12" | 24" | A, B & C |
| InMotion™ Wand | 21" | 12" | 43" | A & B |
| InMotion™ | 21 1/2" | 12" | 44" | A & B |

No-Drill Headrail available on InMotion™ with Medium Cassette only: Minimum Width for InMotion Wand is 22 1/2" and for InMotion Minimum Width is 22". Minimum height for both is 12". Not available at all Retailers.

| Collection Code | Collection Name | Max Width Non-Railroaded | Max Width Railroaded | Available with Seam |
|---|---|---|---|---|
| LS012 | 5% Newport | 98" | 102" | Yes |

*Maximum width of continuous Deluxe Valance = Maximum published non-railroaded width less 8"
Maximum Width and Height for No-Drill Headrail is 84". Not available at all Retailers.

| Top Treatment | Legend | |
|---|---|---|
| Medium Cassette | | |
| Large Cassette | | |
| *Fabric Valance | | |
| Open Roll with Mounting Bar | | |

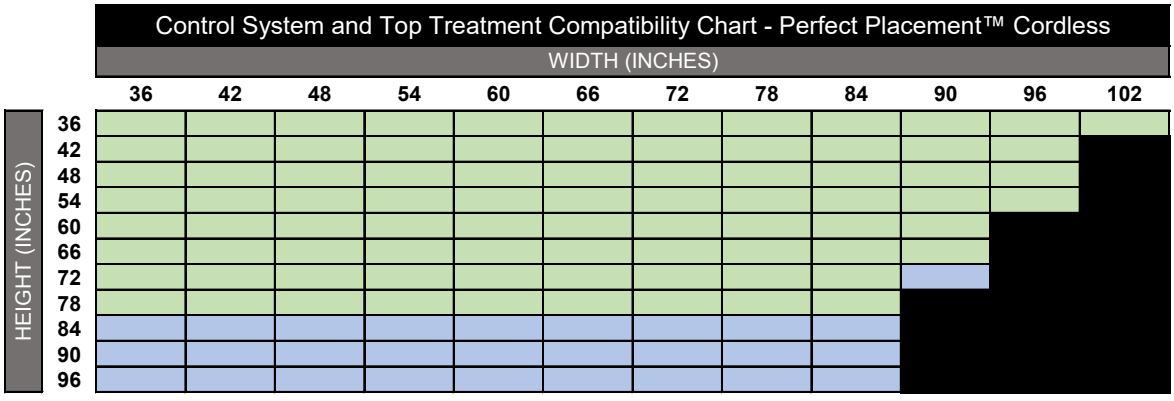


| Control Systems | Minimum Width (Single Panel) | Overall Minimum Width (2 on 1) | Minimum Height | Top Treatment |
|---|---|---|---|---|
| PerfectPlacement™ - Cordless | 18" | N/A | 24" | All |

No-Drill Headrail available on PerfectPlacement™ Cordless with Medium Cassette only: Minimum Width is 18 1/2". Minimum height is 24". Not available at all Retailers.


# PRODUCT SIZE SPECIFICATIONS

| Collection Code | Collection Name | Max Width Non-Railroaded | Max Width Railroaded | Available with Seam |
|---|---|---|---|---|
| LS047 | 5% Solapur | 118" | 132" | Yes |

- Railroad Fabrics (turned width for length) will have a visible seam when fabricated longer than the maximum roll width less 16".
- **Red Box** in spec chart indicates shade sizes Heat Sealed Hem Bar for these sizes.
- Maximum width of continuous Fabric Valance = Maximum published non-railroaded width less 8"
- Maximum Width and Height for No-Drill Headrail is 84". Not available at all Retailers.

| Top Treatment | Legend | | |
|---|---|---|---|
| Medium Cassette | | | |
| Large Cassette | | | |
| Fabric Valance | | | |
| Open Roll | | | |

## Control System and Top Treatment Compatibility Chart - Continuous Cord Loop & InMotion™

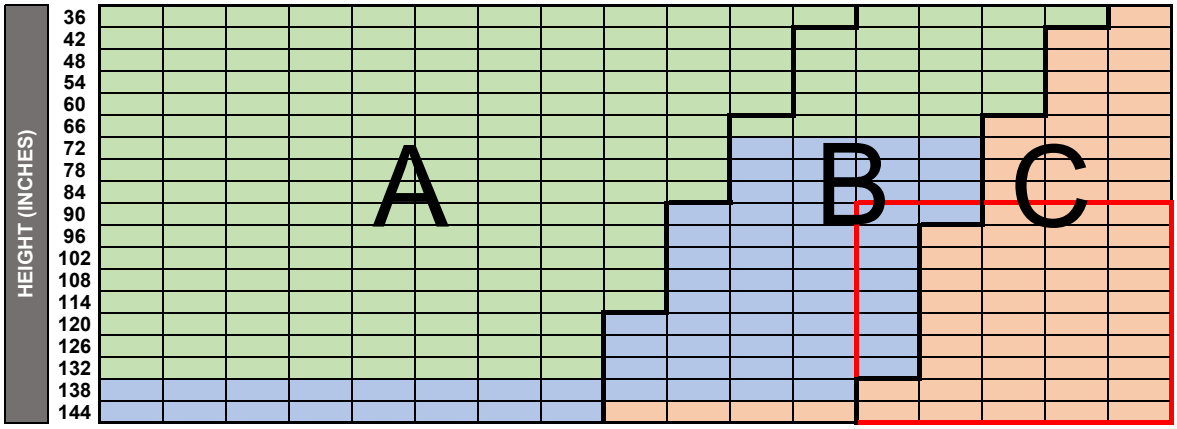


| Control Systems (Minimum height for all Control Systems is 12") | Minimium Width (Single Panel) | Minimum Height | Overall Minimium Width (2-on-1) | Specification Zone(s) |
|---|---|---|---|---|
| Continuous Cord Loop (Maximum height for 12" width is 60") | 12" | 12" | 24" | A, B & C |
| InMotion™ Wand | 21" | 12" | 43" | A & B |
| InMotion™ | 21 1/2" | 12" | 44" | A & B |


No-Drill Headrail available on InMotion™ with Medium Cassette only: Minimum Width for InMotion Wand is 22 1/2" and for InMotion Minimum Width is 22". Minimum height for both is 12". Not available at all Retailers.

| Collection Code | Collection Name | Max Width Non-Railroaded | Max Width Railroaded | Available with Seam |
|---|---|---|---|---|
| LS047 | 5% Solapur | 102" | 102" | No |

*Maximum width of continuous Deluxe Valance = Maximum published non-railroaded width less 8"
Maximum Width and Height for No-Drill Headrail is 84". Not available at all Retailers.

| Top Treatment | Legend | |
|---|---|---|
| Medium Cassette | | |
| Large Cassette | | |
| *Fabric Valance | | |
| Open Roll with Mounting Bar | | |

## Control System and Top Treatment Compatibility Chart - Perfect Placement™ Cordless

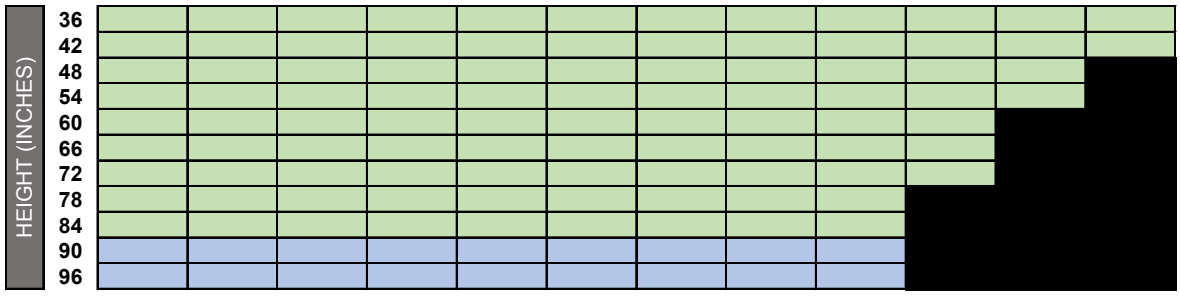


| Control Systems | Minimum Width (Single Panel) | Overall Minimum Width (2 on 1) | Minimum Height | Top Treatment |
|---|---|---|---|---|
| PerfectPlacement™ - Cordless | 18" | N/A | 24" | All |

No-Drill Headrail available on PerfectPlacement™ Cordless with Medium Cassette only: Minimum Width is 18 1/2". Minimum height is 24". Not available at all Retailers.


# PRODUCT SIZE SPECIFICATIONS

| Collection Code | Collection Name | Max Width Non-Railroaded | Max Width Railroaded | Available with Seam |
|---|---|---|---|---|
| LS007 | 5% Sonoma | 118" | 132" | Yes |

- Railroad Fabrics (turned width for length) will have a visible seam when fabricated longer than the maximum roll width less 16".
- **Red Box** in spec chart indicates shade sizes Heat Sealed Hem Bar for these sizes.
- Maximum width of continuous Fabric Valance = Maximum published non-railroaded width less 8"
- Maximum Width and Height for No-Drill Headrail is 84". Not available at all Retailers.

| Top Treatment | Legend | | |
|---|---|---|---|
| Medium Cassette | | | |
| Large Cassette | | | |
| Fabric Valance | | | |
| Open Roll | | | |

## Control System and Top Treatment Compatibility Chart - Continuous Cord Loop & InMotion™

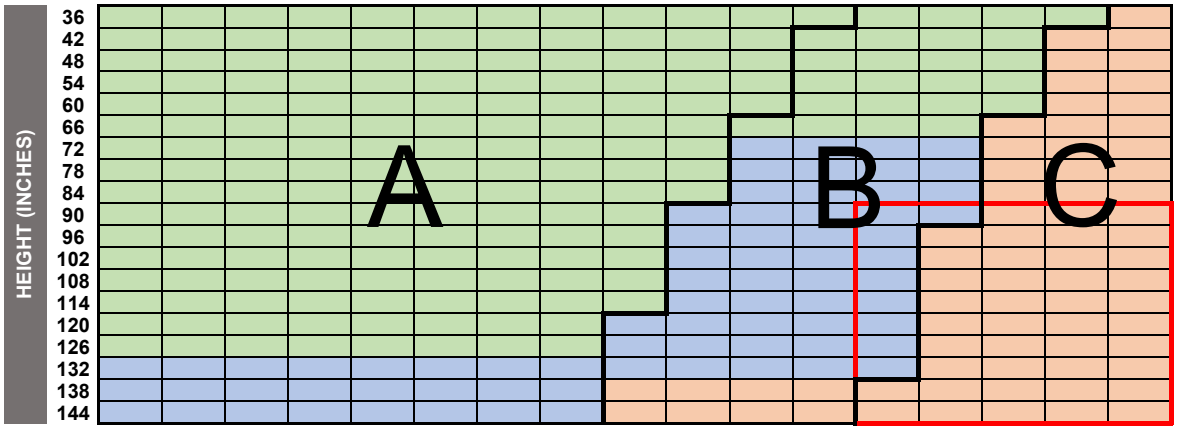


| Control Systems (Minimum height for all Control Systems is 12") | Minimium Width (Single Panel) | Minimum Height | Overall Minimium Width (2-on-1) | Specification Zone(s) |
|---|---|---|---|---|
| Continuous Cord Loop (Maximum height for 12" width is 60") | 12" | 12" | 24" | A, B & C |
| InMotion™ Wand | 21" | 12" | 43" | A & B |
| InMotion™ | 21 1/2" | 12" | 44" | A & B |


No-Drill Headrail available on InMotion™ with Medium Cassette only: Minimum Width for InMotion Wand is 22 1/2" and for InMotion Minimum Width is 22". Minimum height for both is 12". Not available at all Retailers.

| Collection Code | Collection Name | Max Width Non-Railroaded | Max Width Railroaded | Available with Seam |
|---|---|---|---|---|
| LS007 | 5% Sonoma | 102" | 102" | Yes |

*Maximum width of continuous Deluxe Valance = Maximum published non-railroaded width less 8"
Maximum Width and Height for No-Drill Headrail is 84". Not available at all Retailers.

| Top Treatment | Legend | |
|---|---|---|
| Medium Cassette | | |
| Large Cassette | | |
| *Fabric Valance | | |
| Open Roll with Mounting Bar | | |

## Control System and Top Treatment Compatibility Chart - Perfect Placement™ Cordless

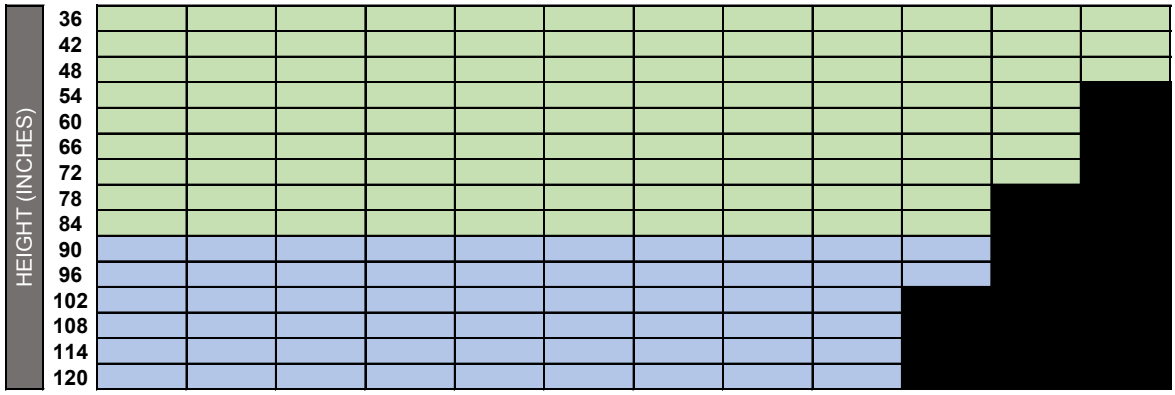


| Control Systems | Minimum Width (Single Panel) | Overall Minimum Width (2 on 1) | Minimum Height | Top Treatment |
|---|---|---|---|---|
| PerfectPlacement™ - Cordless | 18" | N/A | 24" | All |

No-Drill Headrail available on PerfectPlacement™ Cordless with Medium Cassette only: Minimum Width is 18 1/2". Minimum height is 24". Not available at all Retailers.


# PRODUCT SIZE SPECIFICATIONS

| Collection Code | Collection Name | Max Width Non-Railroaded | Max Width Railroaded | Available with Seam |
|---|---|---|---|---|
| LS046 | 10% Solapur | 118" | 132" | Yes |

- Railroad Fabrics (turned width for length) will have a visible seam when fabricated longer than the maximum roll width less 16".
- **Red Box** in spec chart indicates shade sizes Heat Sealed Hem Bar for these sizes.
- Maximum width of continuous Fabric Valance = Maximum published non-railroaded width less 8"
- Maximum Width and Height for No-Drill Headrail is 84". Not available at all Retailers.

| Top Treatment | Legend | | |
|---|---|---|---|
| Medium Cassette | | | |
| Large Cassette | | | |
| Fabric Valance | | | |
| Open Roll | | | |

## Control System and Top Treatment Compatibility Chart - Continuous Cord Loop & InMotion™

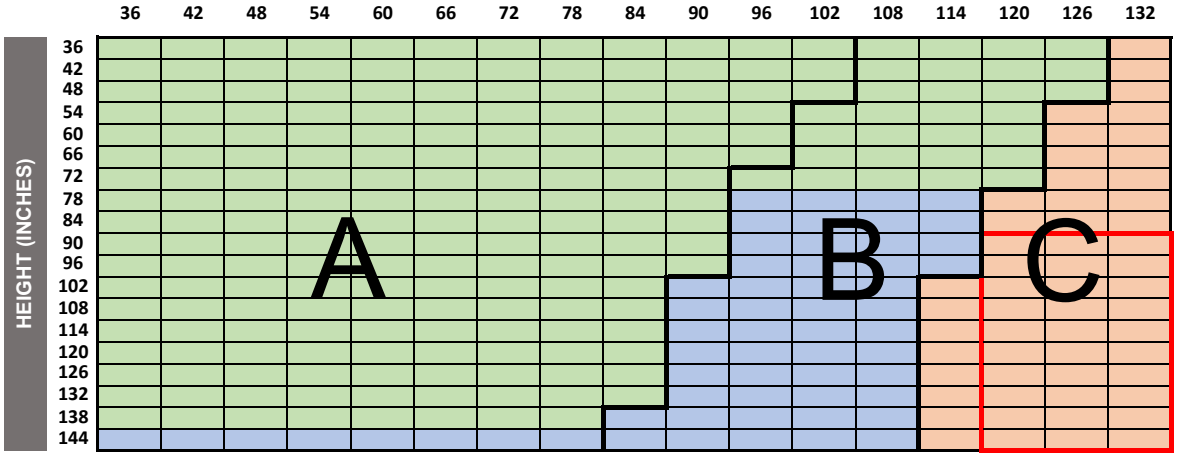


| Control Systems (Minimum height for all Control Systems is 12") | Minimium Width (Single Panel) | Minimum Height | Overall Minimium Width (2-on-1) | Specification Zone(s) |
|---|---|---|---|---|
| Continuous Cord Loop (Maximum height for 12" width is 60") | 12" | 12" | 24" | A, B & C |
| InMotion™ Wand | 21" | 12" | 43" | A & B |
| InMotion™ | 21 1/2" | 12" | 44" | A & B |


No-Drill Headrail available on InMotion™ with Medium Cassette only: Minimum Width for InMotion Wand is 22 1/2" and for InMotion Minimum Width is 22". Minimum height for both is 12". Not available at all Retailers.

| Collection Code | Collection Name | Max Width Non-Railroaded | Max Width Railroaded | Available with Seam |
|---|---|---|---|---|
| LS046 | 10% Solapur | 102" | 102" | Yes |

*Maximum width of continuous Deluxe Valance = Maximum published non-railroaded width less 8"
Maximum Width and Height for No-Drill Headrail is 84". Not available at all Retailers.

| Top Treatment | Legend | |
|---|---|---|
| Medium Cassette | | |
| Large Cassette | | |
| *Fabric Valance | | |
| Open Roll with Mounting Bar | | |

## Control System and Top Treatment Compatibility Chart - Perfect Placement™ Cordless

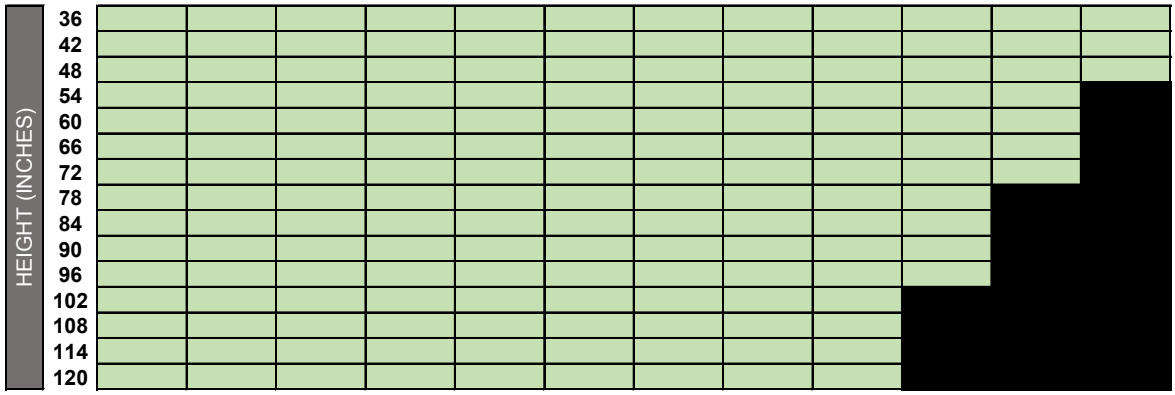


| Control Systems | Minimum Width (Single Panel) | Overall Minimum Width (2 on 1) | Minimum Height | Top Treatment |
|---|---|---|---|---|
| PerfectPlacement™ - Cordless | 18" | N/A | 24" | All |

No-Drill Headrail available on PerfectPlacement™ Cordless with Medium Cassette only: Minimum Width is 18 1/2". Minimum height is 24". Not available at all Retailers.


# PRODUCT SIZE SPECIFICATIONS

| Collection Code | Collection Name | Max Width Non-Railroaded | Max Width Railroaded | Available with Seam |
|---|---|---|---|---|
| LF038 | Aberdeen | 110" | N/A | No |

- Railroad Fabrics (turned width for length) will have a visible seam when fabricated longer than the maximum roll width less 16".
- **Red Box** in spec chart indicates shade sizes Heat Sealed Hem Bar for these sizes.
- Maximum width of continuous Fabric Valance = Maximum published non-railroaded width less 8"
- Maximum Width and Height for No-Drill Headrail is 84". Not available at all Retailers.

| Top Treatment | Legend | | |
|---|---|---|---|
| Medium Cassette | | | |
| Large Cassette | | | |
| Fabric Valance | | | |
| Open Roll | | | |

## Control System and Top Treatment Compatibility Chart - Continuous Cord Loop & InMotion™

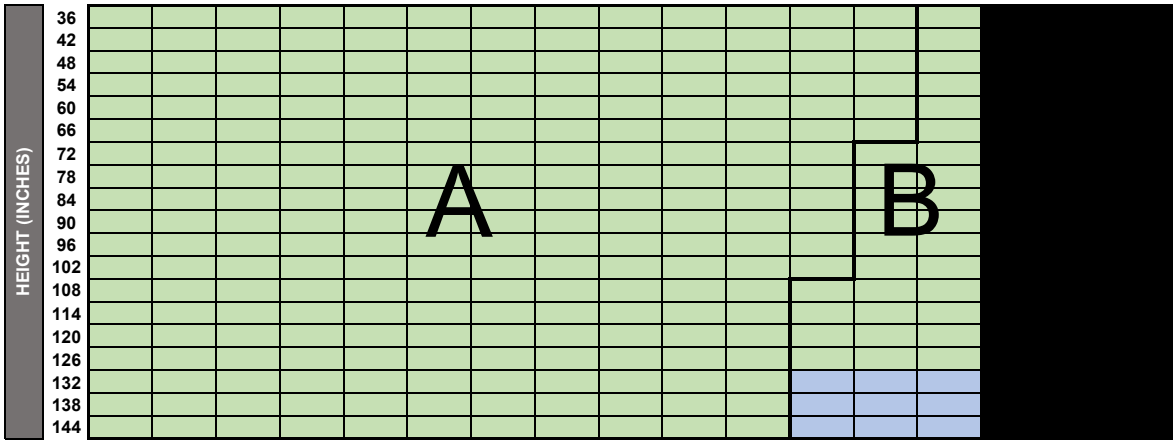


| Control Systems (Minimum height for all Control Systems is 12") | Minimium Width (Single Panel) | Minimum Height | Overall Minimium Width (2-on-1) | Specification Zone(s) |
|---|---|---|---|---|
| Continuous Cord Loop (Maximum height for 12" width is 60") | 12" | 12" | 24" | A, B & C |
| InMotion™ Wand | 21" | 12" | 43" | A & B |
| InMotion™ | 21 1/2" | 12" | 44" | A & B |


No-Drill Headrail available on InMotion™ with Medium Cassette only: Minimum Width for InMotion Wand is 22 1/2" and for InMotion Minimum Width is 22". Minimum height for both is 12". Not available at all Retailers.

| Collection Code | Collection Name | Max Width Non-Railroaded | Max Width Railroaded | Available with Seam |
|---|---|---|---|---|
| LF038 | Aberdeen | 108" | N/A | No |

*Maximum width of continuous Deluxe Valance = Maximum published non-railroaded width less 8"
Maximum Width and Height for No-Drill Headrail is 84". Not available at all Retailers.

| Top Treatment | Legend | |
|---|---|---|
| Medium Cassette | | |
| Large Cassette | | |
| *Fabric Valance | | |
| Open Roll with Mounting Bar | | |

## Control System and Top Treatment Compatibility Chart - Perfect Placement™ Cordless

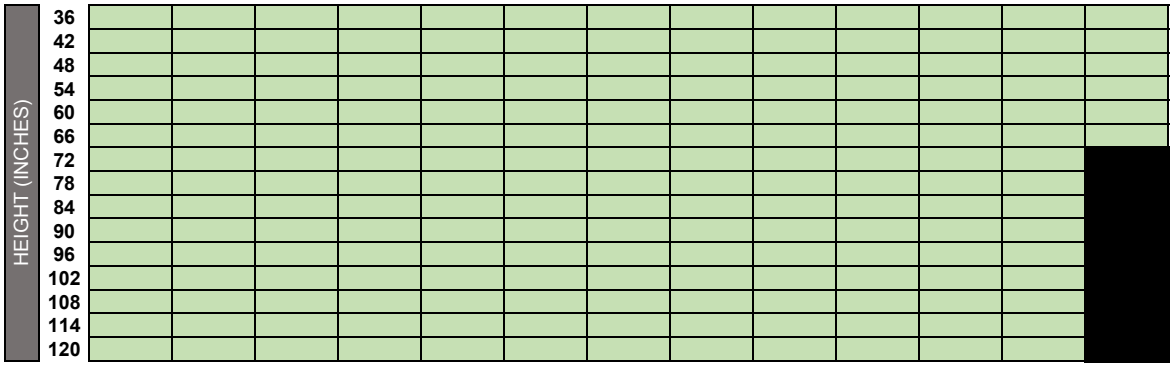


| Control Systems | Minimum Width (Single Panel) | Overall Minimum Width (2 on 1) | Minimum Height | Top Treatment |
|---|---|---|---|---|
| PerfectPlacement™ - Cordless | 18" | N/A | 24" | All |

No-Drill Headrail available on PerfectPlacement™ Cordless with Medium Cassette only: Minimum Width is 18 1/2". Minimum height is 24". Not available at all Retailers.


# PRODUCT SIZE SPECIFICATIONS

| Collection Code | Collection Name | Max Width Non-Railroaded | Max Width Railroaded | Available with Seam |
|---|---|---|---|---|
| LF049 | Aspen | 110" | N/A | No |

- Railroad Fabrics (turned width for length) will have a visible seam when fabricated longer than the maximum roll width less 16".
- **Red Box** in spec chart indicates shade sizes Heat Sealed Hem Bar for these sizes.
- Maximum width of continuous Fabric Valance = Maximum published non-railroaded width less 8"
- Maximum Width and Height for No-Drill Headrail is 84". Not available at all Retailers.

| Top Treatment | Legend | | |
|---|---|---|---|
| Medium Cassette | | | |
| Large Cassette | | | |
| Fabric Valance | | | |
| Open Roll | | | |

## Control System and Top Treatment Compatibility Chart - Continuous Cord Loop & InMotion™

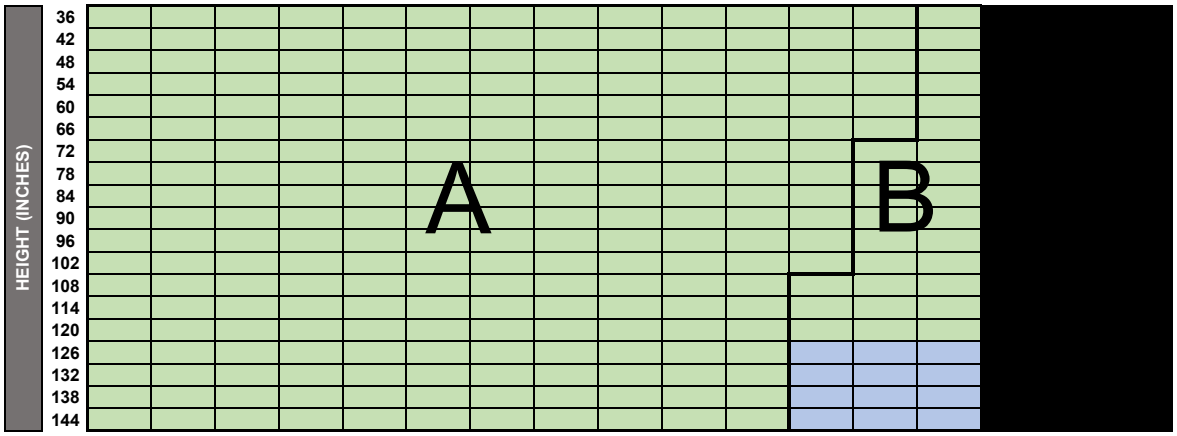


| Control Systems (Minimum height for all Control Systems is 12") | Minimum Width (Single Panel) | Minimum Height | Overall Minimum Width (2-on-1) | Specification Zone(s) |
|---|---|---|---|---|
| Continuous Cord Loop (Maximum height for 12" width is 60") | 12" | 12" | 24" | A, B & C |
| InMotion™ Wand | 21" | 12" | 43" | A & B |
| InMotion™ | 21 1/2" | 12" | 44" | A & B |


No-Drill Headrail available on InMotion™ with Medium Cassette only: Minimum Width for InMotion Wand is 22 1/2" and for InMotion Minimum Width is 22". Minimum height for both is 12". Not available at all Retailers.

| Collection Code | Collection Name | Max Width Non-Railroaded | Max Width Railroaded | Available with Seam |
|---|---|---|---|---|
| LF049 | Aspen | 108" | N/A | No |

*Maximum width of continuous Deluxe Valance = Maximum published non-railroaded width less 8"
Maximum Width and Height for No-Drill Headrail is 84". Not available at all Retailers.

| Top Treatment | Legend | |
|---|---|---|
| Medium Cassette | | |
| Large Cassette | | |
| *Fabric Valance | | |
| Open Roll with Mounting Bar | | |

## Control System and Top Treatment Compatibility Chart - Perfect Placement™ Cordless

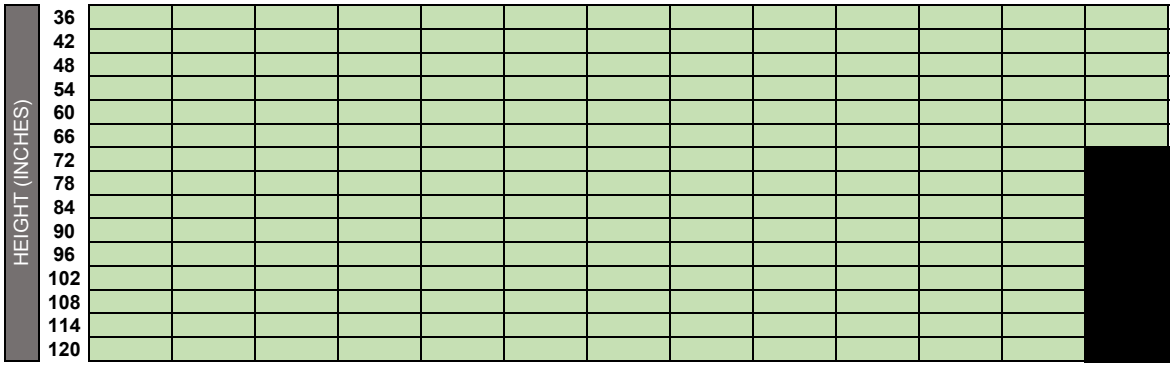


| Control Systems | Minimum Width (Single Panel) | Overall Minimum Width (2 on 1) | Minimum Height | Top Treatment |
|---|---|---|---|---|
| PerfectPlacement™ - Cordless | 18" | N/A | 24" | All |

No-Drill Headrail available on PerfectPlacement™ Cordless with Medium Cassette only: Minimum Width is 18 1/2". Minimum height is 24". Not available at all Retailers.


# PRODUCT SIZE SPECIFICATIONS

| Collection Code | Collection Name | Max Width Non-Railroaded | Max Width Railroaded | Available with Seam |
|---|---|---|---|---|
| LB049 | Aspen Blackout | 110" | 132" | Yes |

- Railroad Fabrics (turned width for length) will have a visible seam when fabricated longer than the maximum roll width less 16".
- **Red Box** in spec chart indicates shade sizes Heat Sealed Hem Bar for these sizes.
- Maximum width of continuous Fabric Valance = Maximum published non-railroaded width less 8"
- Maximum Width and Height for No-Drill Headrail is 84". Not available at all Retailers.

| Top Treatment | Legend | | |
|---|---|---|---|
| Medium Cassette | | | |
| Large Cassette | | | |
| Fabric Valance | | | |
| Open Roll | | | |

## Control System and Top Treatment Compatibility Chart - Continuous Cord Loop & InMotion™

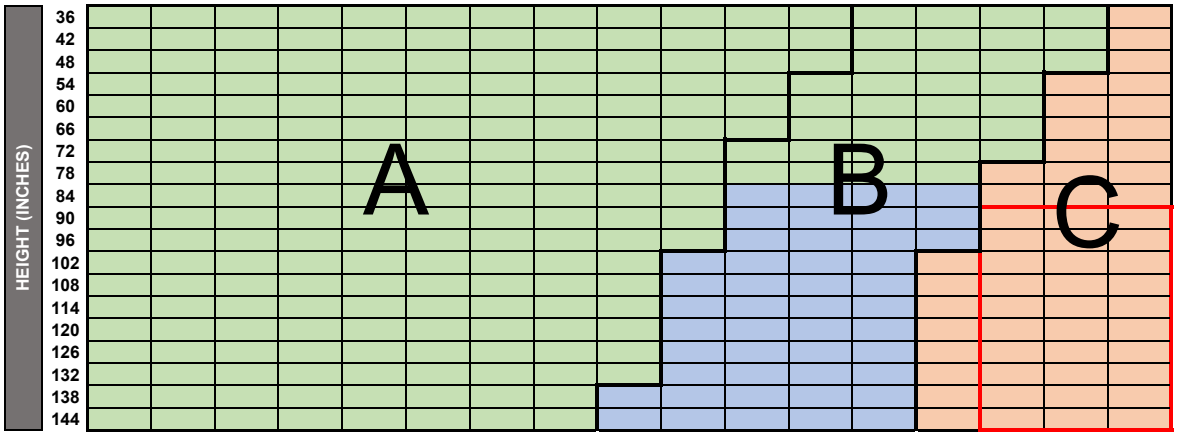


| Control Systems (Minimum height for all Control Systems is 12") | Minimium Width (Single Panel) | Minimum Height | Overall Minimium Width (2-on-1) | Specification Zone(s) |
|---|---|---|---|---|
| Continuous Cord Loop (Maximum height for 12" width is 60") | 12" | 12" | 24" | A, B & C |
| InMotion™ Wand | 21" | 12" | 43" | A & B |
| InMotion™ | 21 1/2" | 12" | 44" | A & B |


No-Drill Headrail available on InMotion™ with Medium Cassette only: Minimum Width for InMotion Wand is 22 1/2" and for InMotion Minimum Width is 22". Minimum height for both is 12". Not available at all Retailers.

| Collection Code | Collection Name | Max Width Non-Railroaded | Max Width Railroaded | Available with Seam |
|---|---|---|---|---|
| LB049 | Aspen Blackout | 102" | 102" | Yes |

*Maximum width of continuous Deluxe Valance = Maximum published non-railroaded width less 8"
Maximum Width and Height for No-Drill Headrail is 84". Not available at all Retailers.

| Top Treatment | Legend | |
|---|---|---|
| Medium Cassette | | |
| Large Cassette | | |
| *Fabric Valance | | |
| Open Roll with Mounting Bar | | |

## Control System and Top Treatment Compatibility Chart - Perfect Placement™ Cordless

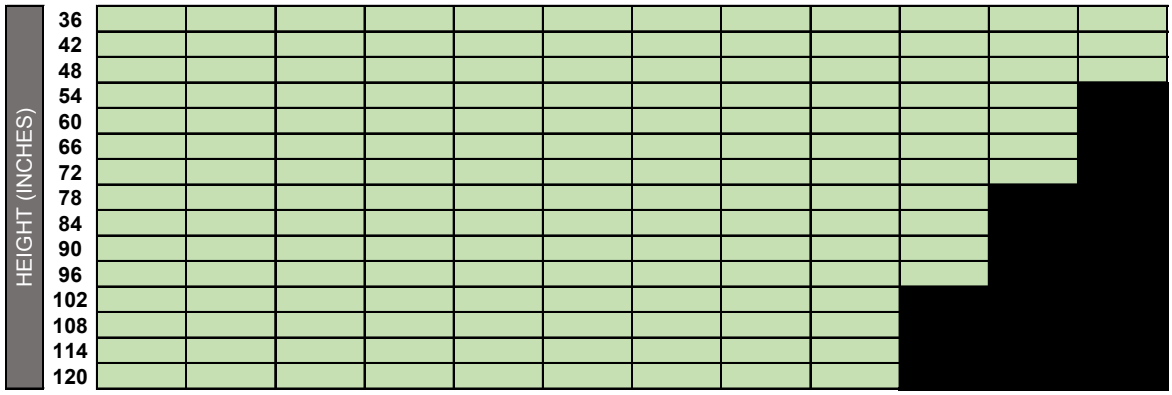


| Control Systems | Minimum Width (Single Panel) | Overall Minimum Width (2 on 1) | Minimum Height | Top Treatment |
|---|---|---|---|---|
| PerfectPlacement™ - Cordless | 18" | N/A | 24" | All |

No-Drill Headrail available on PerfectPlacement™ Cordless with Medium Cassette only: Minimum Width is 18 1/2". Minimum height is 24". Not available at all Retailers.


# PRODUCT SIZE SPECIFICATIONS

| Collection Code | Collection Name | Max Width Non-Railroaded | Max Width Railroaded | Available with Seam |
|---|---|---|---|---|
| LS026 | Barcelona | 105" | N/A | No |

- Railroad Fabrics (turned width for length) will have a visible seam when fabricated longer than the maximum roll width less 16".
- **Red Box** in spec chart indicates shade sizes Heat Sealed Hem Bar for these sizes.
- Maximum width of continuous Fabric Valance = Maximum published non-railroaded width less 8"
- Maximum Width and Height for No-Drill Headrail is 84". Not available at all Retailers.

| Top Treatment | Legend | | |
|---|---|---|---|
| Medium Cassette | | | |
| Large Cassette | | | |
| Fabric Valance | | | |
| Open Roll | | | |

## Control System and Top Treatment Compatibility Chart - Continuous Cord Loop & InMotion™

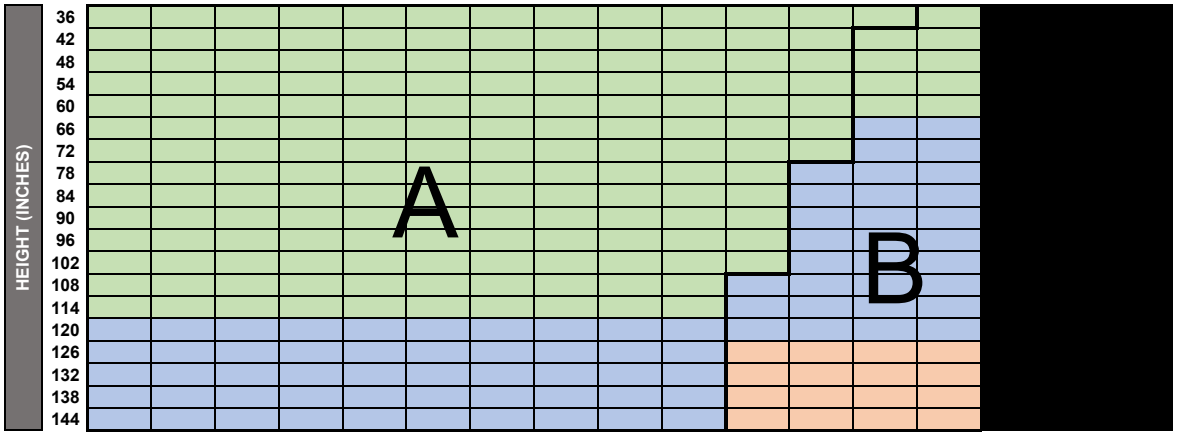


| Control Systems (Minimum height for all Control Systems is 12") | Minimum Width (Single Panel) | Minimum Height | Overall Minimum Width (2-on-1) | Specification Zone(s) |
|---|---|---|---|---|
| Continuous Cord Loop (Maximum height for 12" width is 60") | 12" | 12" | 24" | A, B & C |
| InMotion™ Wand | 21" | 12" | 43" | A & B |
| InMotion™ | 21 1/2" | 12" | 44" | A & B |


No-Drill Headrail available on InMotion™ with Medium Cassette only: Minimum Width for InMotion Wand is 22 1/2" and for InMotion Minimum Width is 22". Minimum height for both is 12". Not available at all Retailers.

| Collection Code | Collection Name | Max Width Non-Railroaded | Max Width Railroaded | Available with Seam |
|---|---|---|---|---|
| LF026 | Barcelona | 105" | N/A | No |

*Maximum width of continuous Deluxe Valance = Maximum published non-railroaded width less 8"
Maximum Width and Height for No-Drill Headrail is 84". Not available at all Retailers.

| Top Treatment | Legend | |
|---|---|---|
| Medium Cassette | | |
| Large Cassette | | |
| *Fabric Valance | | |
| Open Roll with Mounting Bar | | |

## Control System and Top Treatment Compatibility Chart - Perfect Placement™ Cordless

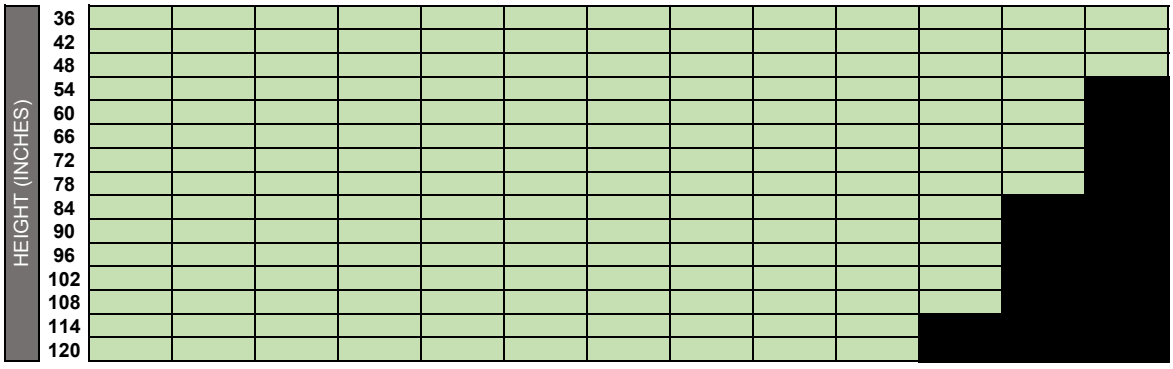


| Control Systems | Minimum Width (Single Panel) | Overall Minimum Width (2 on 1) | Minimum Height | Top Treatment |
|---|---|---|---|---|
| PerfectPlacement™ - Cordless | 18" | N/A | 24" | All |

No-Drill Headrail available on PerfectPlacement™ Cordless with Medium Cassette only: Minimum Width is 18 1/2". Minimum height is 24". Not available at all Retailers.


# PRODUCT SIZE SPECIFICATIONS

| Collection Code | Collection Name | Max Width Non-Railroaded | Max Width Railroaded | Available with Seam |
|---|---|---|---|---|
| LB026 | Barcelona Blackout | 105" | N/A | No |

- Railroad Fabrics (turned width for length) will have a visible seam when fabricated longer than the maximum roll width less 16".
- **Red Box** in spec chart indicates shade sizes Heat Sealed Hem Bar for these sizes.
- Maximum width of continuous Fabric Valance = Maximum published non-railroaded width less 8"
- Maximum Width and Height for No-Drill Headrail is 84". Not available at all Retailers.

| Top Treatment | Legend | | |
|---|---|---|---|
| Medium Cassette | | | |
| Large Cassette | | | |
| Fabric Valance | | | |
| Open Roll | | | |

## Control System and Top Treatment Compatibility Chart - Continuous Cord Loop & InMotion™

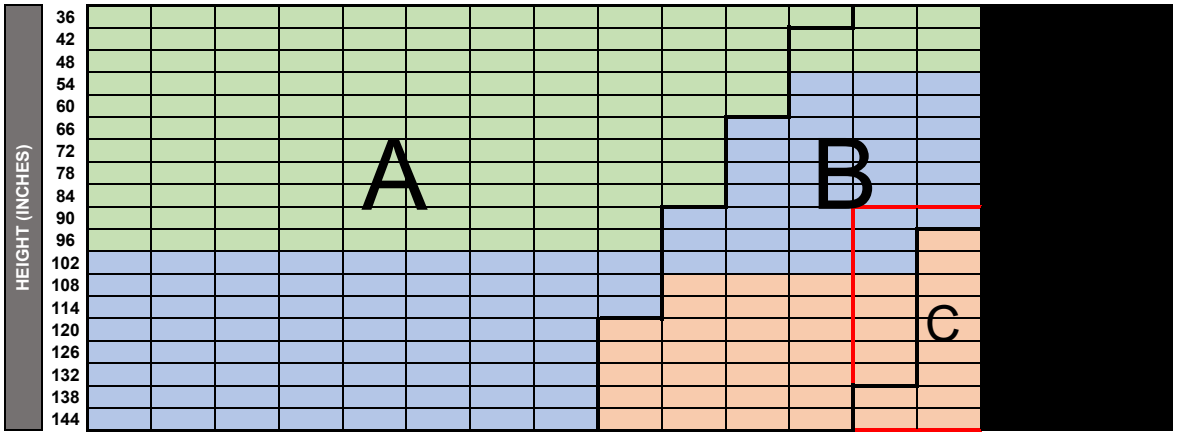


| Control Systems (Minimum height for all Control Systems is 12") | Minimum Width (Single Panel) | Minimum Height | Overall Minimum Width (2-on-1) | Specification Zone(s) |
|---|---|---|---|---|
| Continuous Cord Loop (Maximum height for 12" width is 60") | 12" | 12" | 24" | A, B & C |
| InMotion™ Wand | 21" | 12" | 43" | A & B |
| InMotion™ | 21 1/2" | 12" | 44" | A & B |


No-Drill Headrail available on InMotion™ with Medium Cassette only: Minimum Width for InMotion Wand is 22 1/2" and for InMotion Minimum Width is 22". Minimum height for both is 12". Not available at all Retailers.

| Collection Code | Collection Name | Max Width Non-Railroaded | Max Width Railroaded | Available with Seam |
|---|---|---|---|---|
| LB026 | Barcelona Blackout | 102" | N/A | No |

*Maximum width of continuous Deluxe Valance = Maximum published non-railroaded width less 8"
Maximum Width and Height for No-Drill Headrail is 84". Not available at all Retailers.

| Top Treatment | Legend | |
|---|---|---|
| Medium Cassette | | |
| Large Cassette | | |
| *Fabric Valance | | |
| Open Roll with Mounting Bar | | |

## Control System and Top Treatment Compatibility Chart - Perfect Placement™ Cordless

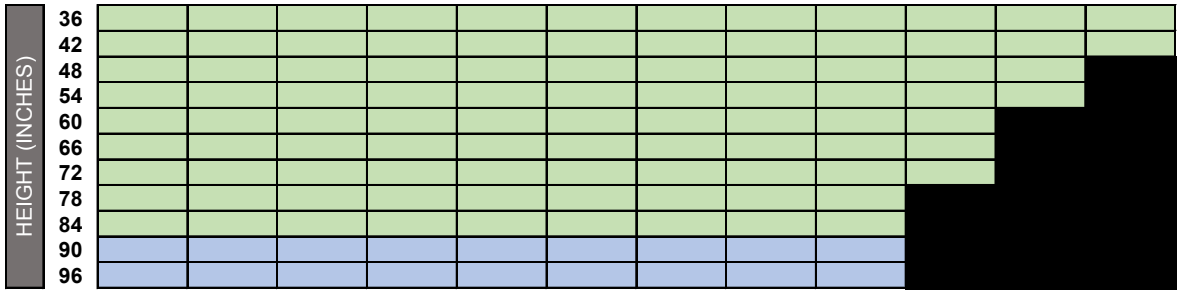


| Control Systems | Minimum Width (Single Panel) | Overall Minimum Width (2 on 1) | Minimum Height | Top Treatment |
|---|---|---|---|---|
| PerfectPlacement™ - Cordless | 18" | N/A | 24" | All |


No-Drill Headrail available on PerfectPlacement™ Cordless with Medium Cassette only: Minimum Width is 18 1/2". Minimum height is 24". Not available at all Retailers.

# PRODUCT SIZE SPECIFICATIONS

| Collection Code | Collection Name | Max Width Non-Railroaded | Max Width Railroaded | Available with Seam |
|---|---|---|---|---|
| LF019 | Bellamy | 110" | N/A | No |

- Railroad Fabrics (turned width for length) will have a visible seam when fabricated longer than the maximum roll width less 16".
- **Red Box** in spec chart indicates shade sizes Heat Sealed Hem Bar for these sizes.
- Maximum width of continuous Fabric Valance = Maximum published non-railroaded width less 8"
- Maximum Width and Height for No-Drill Headrail is 84". Not available at all Retailers.

| Top Treatment | Legend | | |
|---|---|---|---|
| Medium Cassette | | | |
| Large Cassette | | | |
| Fabric Valance | | | |
| Open Roll | | | |

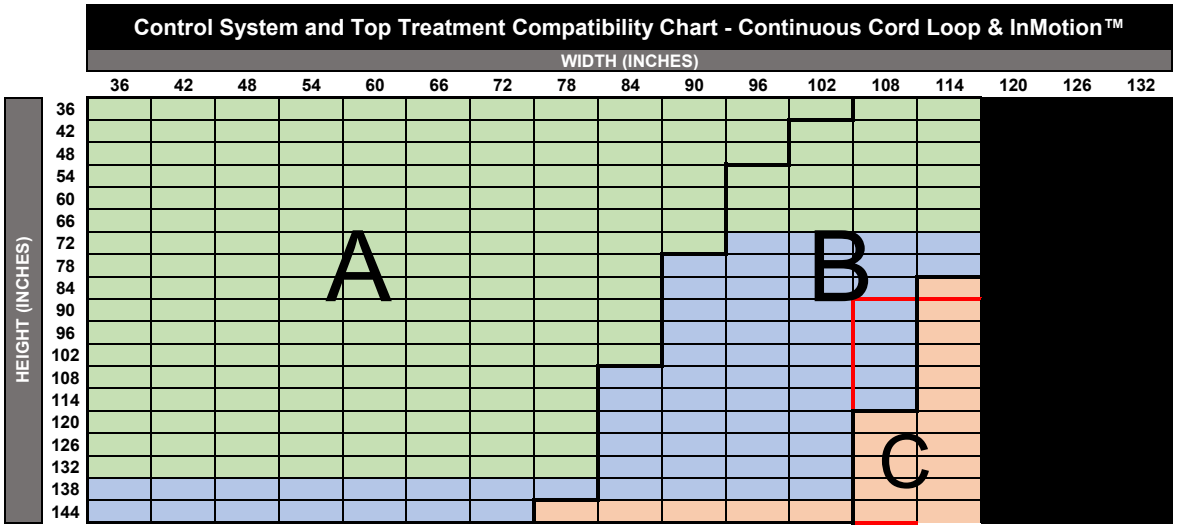



| Control Systems (Minimum height for all Control Systems is 12") | Minimum Width (Single Panel) | Minimum Height | Overall Minimum Width (2-on-1) | Specification Zone(s) |
|---|---|---|---|---|
| Continuous Cord Loop (Maximum height for 12" width is 60") | 12" | 12" | 24" | A, B & C |
| InMotion™ Wand | 21" | 12" | 43" | A & B |
| InMotion™ | 21 1/2" | 12" | 44" | A & B |

No-Drill Headrail available on InMotion™ with Medium Cassette only: Minimum Width for InMotion Wand is 22 1/2" and for InMotion Minimum Width is 22". Minimum height for both is 12". Not available at all Retailers.

| Collection Code | Collection Name | Max Width Non-Railroaded | Max Width Railroaded | Available with Seam |
|---|---|---|---|---|
| LF019 | Bellamy | 108" | N/A | No |

*Maximum width of continuous Deluxe Valance = Maximum published non-railroaded width less 8"
Maximum Width and Height for No-Drill Headrail is 84". Not available at all Retailers.

| Top Treatment | Legend | |
|---|---|---|
| Medium Cassette | | |
| Large Cassette | | |
| *Fabric Valance | | |
| Open Roll with Mounting Bar | | |

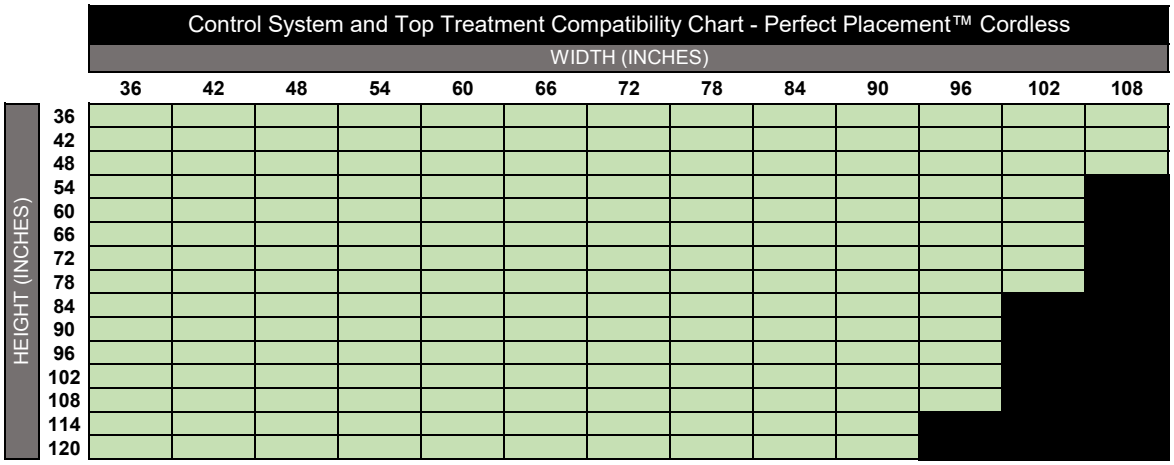


| Control Systems | Minimum Width (Single Panel) | Overall Minimum Width (2 on 1) | Minimum Height | Top Treatment |
|---|---|---|---|---|
| PerfectPlacement™ - Cordless | 18" | N/A | 24" | All |

No-Drill Headrail available on PerfectPlacement™ Cordless with Medium Cassette only: Minimum Width is 18 1/2". Minimum height is 24". Not available at all Retailers.


# PRODUCT SIZE SPECIFICATIONS

| Collection Code | Collection Name | Max Width Non-Railroaded | Max Width Railroaded | Available with Seam |
|---|---|---|---|---|
| LB019 | Bellamy Blackout | 110" | N/A | No |

- Railroad Fabrics (turned width for length) will have a visible seam when fabricated longer than the maximum roll width less 16".
- **Red Box** in spec chart indicates shade sizes Heat Sealed Hem Bar for these sizes.
- Maximum width of continuous Fabric Valance = Maximum published non-railroaded width less 8"
- Maximum Width and Height for No-Drill Headrail is 84". Not available at all Retailers.

| Top Treatment | Legend | | |
|---|---|---|---|
| Medium Cassette | | | |
| Large Cassette | | | |
| Fabric Valance | | | |
| Open Roll | | | |

## Control System and Top Treatment Compatibility Chart - Continuous Cord Loop & InMotion™

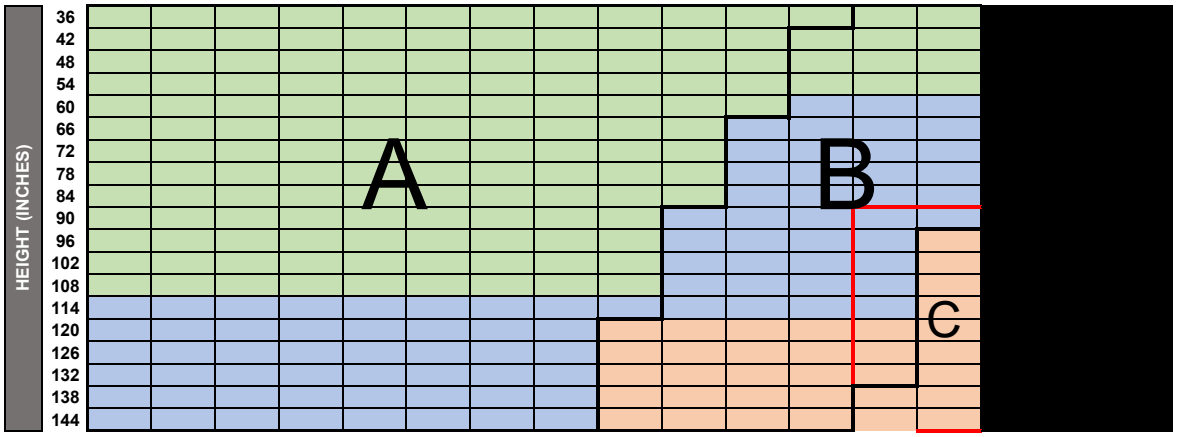


| Control Systems (Minimum height for all Control Systems is 12") | Minimium Width (Single Panel) | Minimum Height | Overall Minimium Width (2-on-1) | Specification Zone(s) |
|---|---|---|---|---|
| Continuous Cord Loop (Maximum height for 12" width is 60") | 12" | 12" | 24" | A, B & C |
| InMotion™ Wand | 21" | 12" | 43" | A & B |
| InMotion™ | 21 1/2" | 12" | 44" | A & B |


No-Drill Headrail available on InMotion™ with Medium Cassette only: Minimum Width for InMotion Wand is 22 1/2" and for InMotion Minimum Width is 22". Minimum height for both is 12". Not available at all Retailers.

| Collection Code | Collection Name | Max Width Non-Railroaded | Max Width Railroaded | Available with Seam |
|---|---|---|---|---|
| LB019 | Bellamy Blackout | 102" | N/A | No |

*Maximum width of continuous Deluxe Valance = Maximum published non-railroaded width less 8"
Maximum Width and Height for No-Drill Headrail is 84". Not available at all Retailers.

| Top Treatment | Legend | |
|---|---|---|
| Medium Cassette | | |
| Large Cassette | | |
| *Fabric Valance | | |
| Open Roll with Mounting Bar | | |

## Control System and Top Treatment Compatibility Chart - Perfect Placement™ Cordless

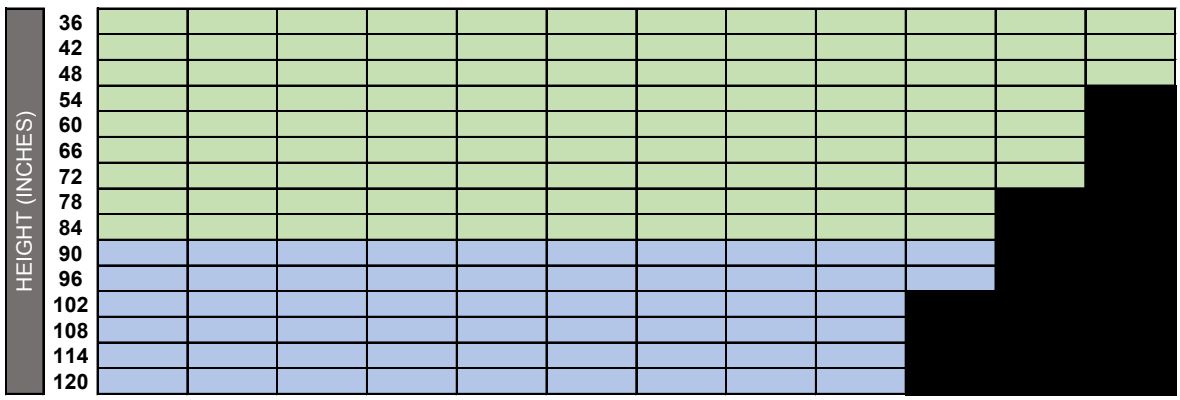


| Control Systems | Minimum Width (Single Panel) | Overall Minimum Width (2 on 1) | Minimum Height | Top Treatment |
|---|---|---|---|---|
| PerfectPlacement™ - Cordless | 18" | N/A | 24" | All |

No-Drill Headrail available on PerfectPlacement™ Cordless with Medium Cassette only: Minimum Width is 18 1/2". Minimum height is 24". Not available at all Retailers.


# PRODUCT SIZE SPECIFICATIONS

| Collection Code | Collection Name | Max Width Non-Railroaded | Max Width Railroaded | Available with Seam |
|---|---|---|---|---|
| LF054 | Belmont | 118" | N/A | No |

- Railroad Fabrics (turned width for length) will have a visible seam when fabricated longer than the maximum roll width less 16".
- **Red Box** in spec chart indicates shade sizes Heat Sealed Hem Bar for these sizes.
- Maximum width of continuous Fabric Valance = Maximum published non-railroaded width less 8"
- Maximum Width and Height for No-Drill Headrail is 84". Not available at all Retailers.

| Top Treatment | Legend | | |
|---|---|---|---|
| Medium Cassette | | | |
| Large Cassette | | | |
| Fabric Valance | | | |
| Open Roll | | | |

## Control System and Top Treatment Compatibility Chart - Continuous Cord Loop & InMotion™

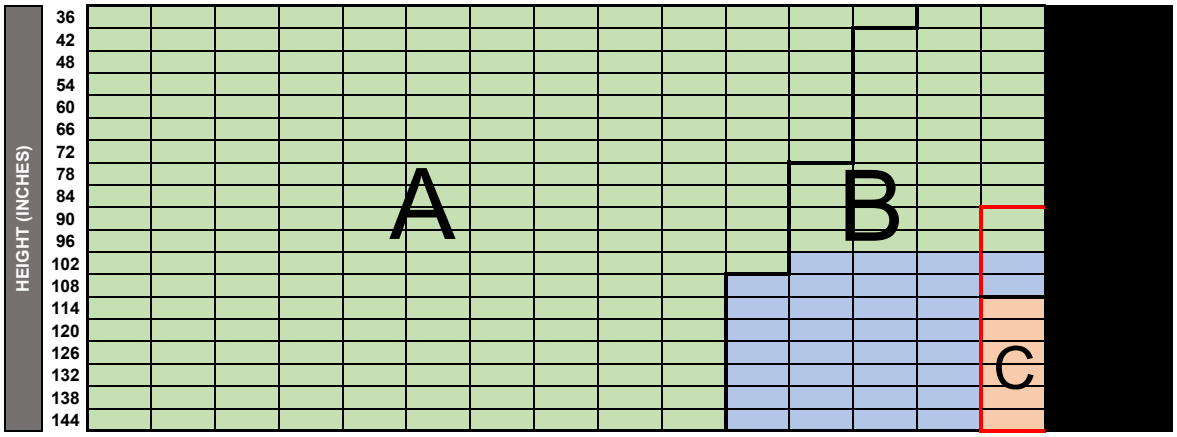


| Control Systems (Minimum height for all Control Systems is 12") | Minimium Width (Single Panel) | Minimum Height | Overall Minimium Width (2-on-1) | Specification Zone(s) |
|---|---|---|---|---|
| Continuous Cord Loop (Maximum height for 12" width is 60") | 12" | 12" | 24" | A, B & C |
| InMotion™ Wand | 21" | 12" | 43" | A & B |
| InMotion™ | 21 1/2" | 12" | 44" | A & B |


No-Drill Headrail available on InMotion™ with Medium Cassette only: Minimum Width for InMotion Wand is 22 1/2" and for InMotion Minimum Width is 22". Minimum height for both is 12". Not available at all Retailers.

| Collection Code | Collection Name | Max Width Non-Railroaded | Max Width Railroaded | Available with Seam |
|---|---|---|---|---|
| LF054 | Belmont | 108" | N/A | No |

*Maximum width of continuous Deluxe Valance = Maximum published non-railroaded width less 8"
Maximum Width and Height for No-Drill Headrail is 84". Not available at all Retailers.

| Top Treatment | Legend | |
|---|---|---|
| Medium Cassette | | |
| Large Cassette | | |
| *Fabric Valance | | |
| Open Roll with Mounting Bar | | |

## Control System and Top Treatment Compatibility Chart - Perfect Placement™ Cordless

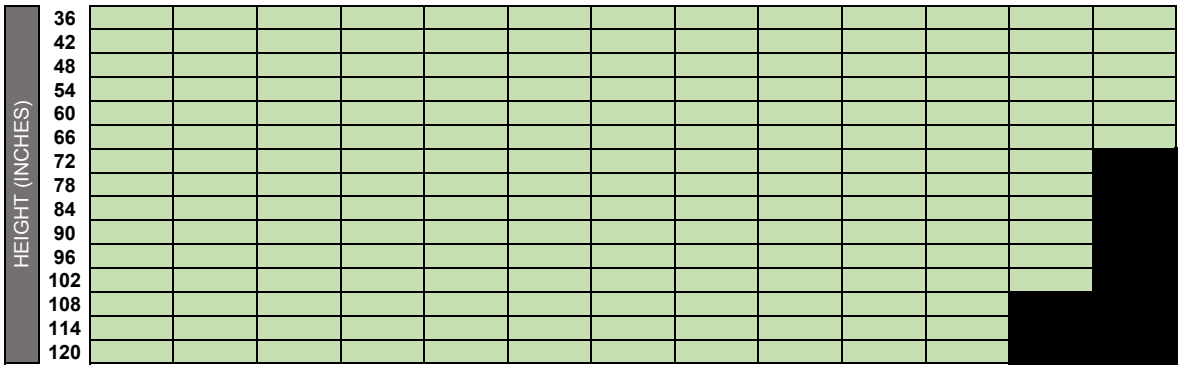


| Control Systems | Minimum Width (Single Panel) | Overall Minimum Width (2 on 1) | Minimum Height | Top Treatment |
|---|---|---|---|---|
| PerfectPlacement™ - Cordless | 18" | N/A | 24" | All |

No-Drill Headrail available on PerfectPlacement™ Cordless with Medium Cassette only: Minimum Width is 18 1/2". Minimum height is 24". Not available at all Retailers.


# PRODUCT SIZE SPECIFICATIONS

| Collection Code | Collection Name | Max Width Non-Railroaded | Max Width Railroaded | Available with Seam |
|---|---|---|---|---|
| LB054 | Belmont Blackout | 118" | N/A | No |

- Railroad Fabrics (turned width for length) will have a visible seam when fabricated longer than the maximum roll width less 16".
- **Red Box** in spec chart indicates shade sizes Heat Sealed Hem Bar for these sizes.
- Maximum width of continuous Fabric Valance = Maximum published non-railroaded width less 8"
- Maximum Width and Height for No-Drill Headrail is 84". Not available at all Retailers.

| Top Treatment | Legend | | |
|---|---|---|---|
| Medium Cassette | | | |
| Large Cassette | | | |
| Fabric Valance | | | |
| Open Roll | | | |

## Control System and Top Treatment Compatibility Chart - Continuous Cord Loop & InMotion™

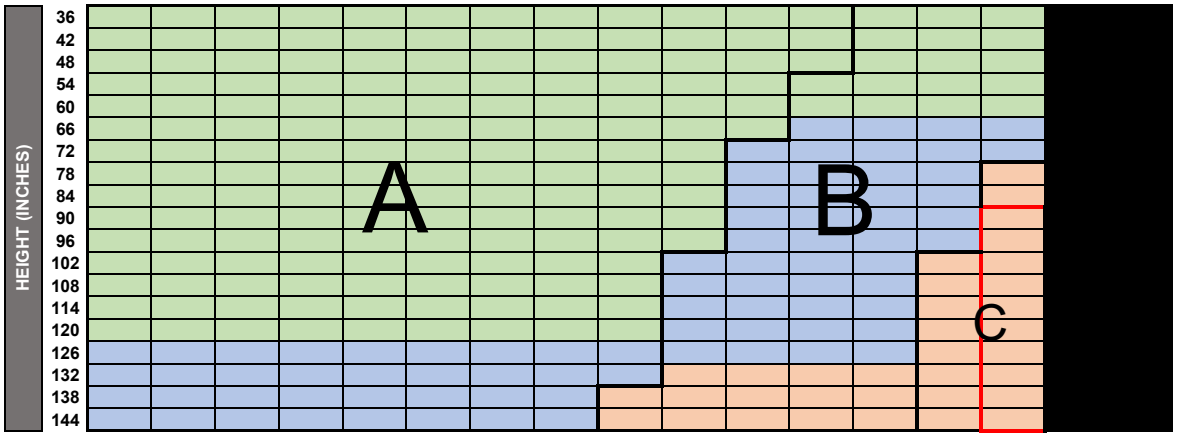


| Control Systems (Minimum height for all Control Systems is 12") | Minimium Width (Single Panel) | Minimum Height | Overall Minimium Width (2-on-1) | Specification Zone(s) |
|---|---|---|---|---|
| Continuous Cord Loop (Maximum height for 12" width is 60") | 12" | 12" | 24" | A, B & C |
| InMotion™ Wand | 21" | 12" | 43" | A & B |
| InMotion™ | 21 1/2" | 12" | 44" | A & B |


No-Drill Headrail available on InMotion™ with Medium Cassette only: Minimum Width for InMotion Wand is 22 1/2" and for InMotion Minimum Width is 22". Minimum height for both is 12". Not available at all Retailers.

| Collection Code | Collection Name | Max Width Non-Railroaded | Max Width Railroaded | Available with Seam |
|---|---|---|---|---|
| LB054 | Belmont Blackout | 102" | N/A | No |

*Maximum width of continuous Deluxe Valance = Maximum published non-railroaded width less 8"
Maximum Width and Height for No-Drill Headrail is 84". Not available at all Retailers.

| Top Treatment | Legend | |
|---|---|---|
| Medium Cassette | | |
| Large Cassette | | |
| *Fabric Valance | | |
| Open Roll with Mounting Bar | | |

## Control System and Top Treatment Compatibility Chart - Perfect Placement™ Cordless

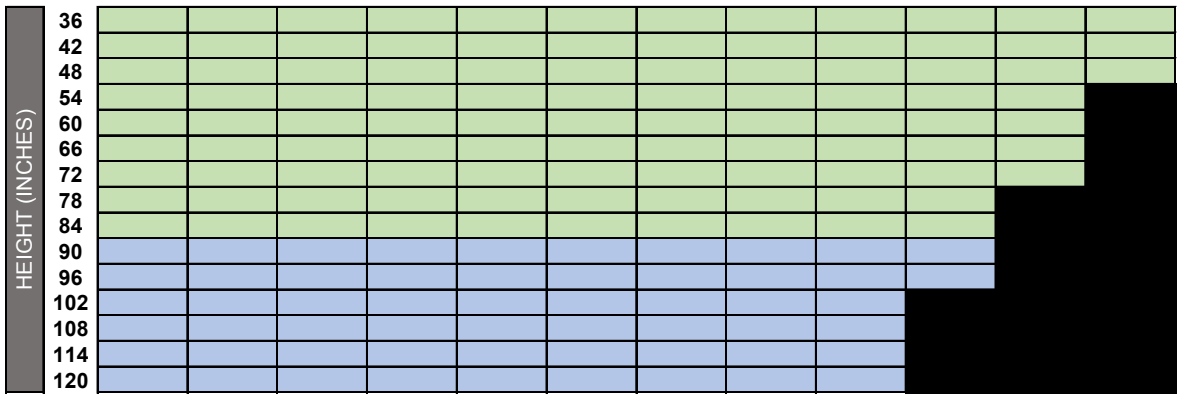


| Control Systems | Minimum Width (Single Panel) | Overall Minimum Width (2 on 1) | Minimum Height | Top Treatment |
|---|---|---|---|---|
| PerfectPlacement™ - Cordless | 18" | N/A | 24" | All |

No-Drill Headrail available on PerfectPlacement™ Cordless with Medium Cassette only: Minimum Width is 18 1/2". Minimum height is 24". Not available at all Retailers.


# PRODUCT SIZE SPECIFICATIONS

| Collection Code | Collection Name | Max Width Non-Railroaded | Max Width Railroaded | Available with Seam |
|---|---|---|---|---|
| LF052 | Boulevard | 110" | N/A | No |

- Railroad Fabrics (turned width for length) will have a visible seam when fabricated longer than the maximum roll width less 16".
- **Red Box** in spec chart indicates shade sizes Heat Sealed Hem Bar for these sizes.
- Maximum width of continuous Fabric Valance = Maximum published non-railroaded width less 8"
- Maximum Width and Height for No-Drill Headrail is 84". Not available at all Retailers.

| Top Treatment | Legend | | |
|---|---|---|---|
| Medium Cassette | | | |
| Large Cassette | | | |
| Fabric Valance | | | |
| Open Roll | | | |

## Control System and Top Treatment Compatibility Chart - Continuous Cord Loop & InMotion™

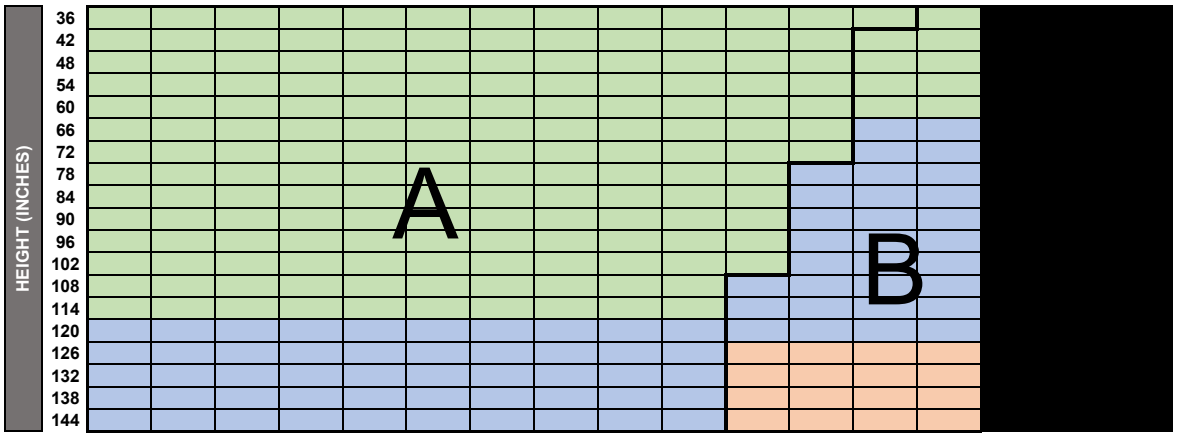


| Control Systems (Minimum height for all Control Systems is 12") | Minimium Width (Single Panel) | Minimum Height | Overall Minimium Width (2-on-1) | Specification Zone(s) |
|---|---|---|---|---|
| Continuous Cord Loop (Maximum height for 12" width is 60") | 12" | 12" | 24" | A, B & C |
| InMotion™ Wand | 21" | 12" | 43" | A & B |
| InMotion™ | 21 1/2" | 12" | 44" | A & B |


No-Drill Headrail available on InMotion™ with Medium Cassette only: Minimum Width for InMotion Wand is 22 1/2" and for InMotion Minimum Width is 22". Minimum height for both is 12". Not available at all Retailers.

| Collection Code | Collection Name | Max Width Non-Railroaded | Max Width Railroaded | Available with Seam |
|---|---|---|---|---|
| LF052 | Boulevard | 108" | N/A | No |

*Maximum width of continuous Deluxe Valance = Maximum published non-railroaded width less 8"
Maximum Width and Height for No-Drill Headrail is 84". Not available at all Retailers.

| Top Treatment | Legend | |
|---|---|---|
| Medium Cassette | | |
| Large Cassette | | |
| *Fabric Valance | | |
| Open Roll with Mounting Bar | | |

## Control System and Top Treatment Compatibility Chart - Perfect Placement™ Cordless

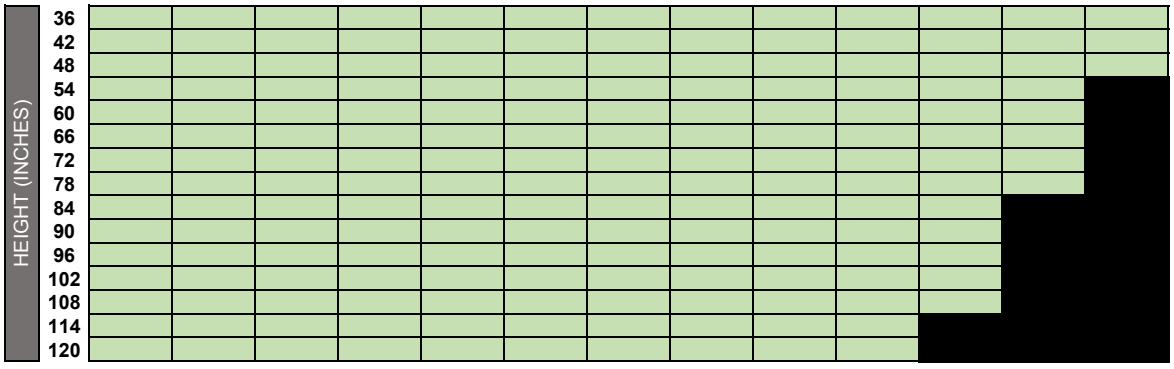


| Control Systems | Minimum Width (Single Panel) | Overall Minimum Width (2 on 1) | Minimum Height | Top Treatment |
|---|---|---|---|---|
| PerfectPlacement™ - Cordless | 18" | N/A | 24" | All |

No-Drill Headrail available on PerfectPlacement™ Cordless with Medium Cassette only: Minimum Width is 18 1/2". Minimum height is 24". Not available at all Retailers.


# PRODUCT SIZE SPECIFICATIONS

| Collection Code | Collection Name | Max Width Non-Railroaded | Max Width Railroaded | Available with Seam |
|---|---|---|---|---|
| LB052 | Boulevard Blackout | 110" | N/A | No |

- Railroad Fabrics (turned width for length) will have a visible seam when fabricated longer than the maximum roll width less 16".
- **Red Box** in spec chart indicates shade sizes Heat Sealed Hem Bar for these sizes.
- Maximum width of continuous Fabric Valance = Maximum published non-railroaded width less 8"
- Maximum Width and Height for No-Drill Headrail is 84". Not available at all Retailers.

| Top Treatment | Legend | | |
|---|---|---|---|
| Medium Cassette | | | |
| Large Cassette | | | |
| Fabric Valance | | | |
| Open Roll | | | |

## Control System and Top Treatment Compatibility Chart - Continuous Cord Loop & InMotion™

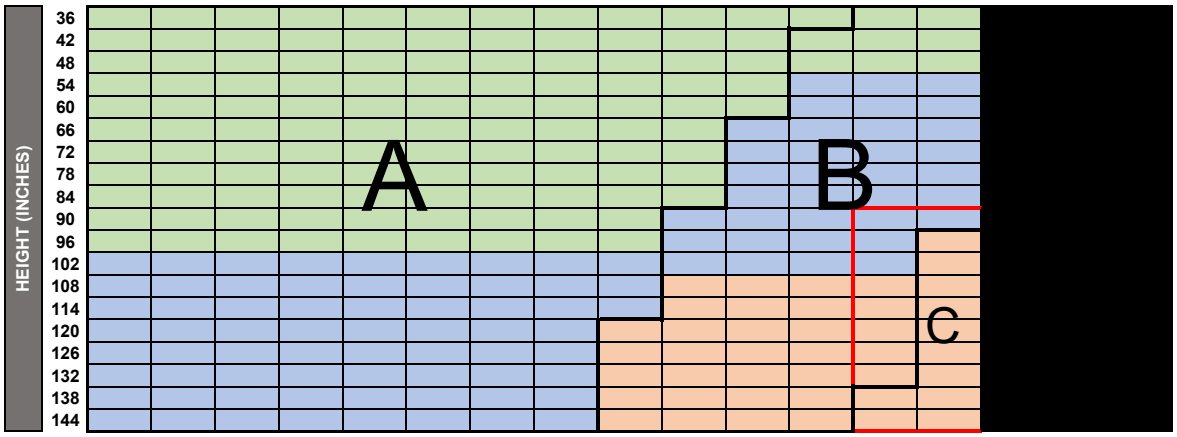


| Control Systems (Minimum height for all Control Systems is 12") | Minimum Width (Single Panel) | Minimum Height | Overall Minimum Width (2-on-1) | Specification Zone(s) |
|---|---|---|---|---|
| Continuous Cord Loop (Maximum height for 12" width is 60") | 12" | 12" | 24" | A, B & C |
| InMotion™ Wand | 21" | 12" | 43" | A & B |
| InMotion™ | 21 1/2" | 12" | 44" | A & B |


No-Drill Headrail available on InMotion™ with Medium Cassette only: Minimum Width for InMotion Wand is 22 1/2" and for InMotion Minimum Width is 22". Minimum height for both is 12". Not available at all Retailers.

| Collection Code | Collection Name | Max Width Non-Railroaded | Max Width Railroaded | Available with Seam |
|---|---|---|---|---|
| LB052 | Boulevard Blackout | 102" | N/A | No |

*Maximum width of continuous Deluxe Valance = Maximum published non-railroaded width less 8"
Maximum Width and Height for No-Drill Headrail is 84". Not available at all Retailers.

| Top Treatment | Legend | |
|---|---|---|
| Medium Cassette | | |
| Large Cassette | | |
| *Fabric Valance | | |
| Open Roll with Mounting Bar | | |

## Control System and Top Treatment Compatibility Chart - Perfect Placement™ Cordless

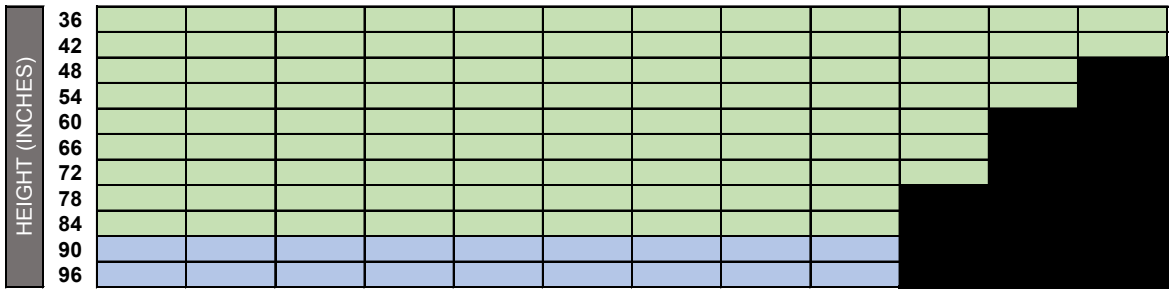


| Control Systems | Minimum Width (Single Panel) | Overall Minimum Width (2 on 1) | Minimum Height | Top Treatment |
|---|---|---|---|---|
| PerfectPlacement™ - Cordless | 18" | N/A | 24" | All |

No-Drill Headrail available on PerfectPlacement™ Cordless with Medium Cassette only: Minimum Width is 18 1/2". Minimum height is 24". Not available at all Retailers.


# PRODUCT SIZE SPECIFICATIONS

| Collection Code | Collection Name | Max Width Non-Railroaded | Max Width Railroaded | Available wIth Seam |
|---|---|---|---|---|
| LF033 | Brighton | 110" | N/A | No |

- Railroad Fabrics (turned width for length) will have a visible seam when fabricated longer than the maximum roll width less 16".
- **Red Box** in spec chart indicates shade sizes Heat Sealed Hem Bar for these sizes.
- Maximum width of continuous Fabric Valance = Maximum published non-railroaded width less 8"
- Maximum Width and Height for No-Drill Headrail is 84". Not available at all Retailers.

| Top Treatment | Legend | | |
|---|---|---|---|
| Medium Cassette | | | |
| Large Cassette | | | |
| Fabric Valance | | | |
| Open Roll | | | |

## Control System and Top Treatment Compatibility Chart - Continuous Cord Loop & InMotion™

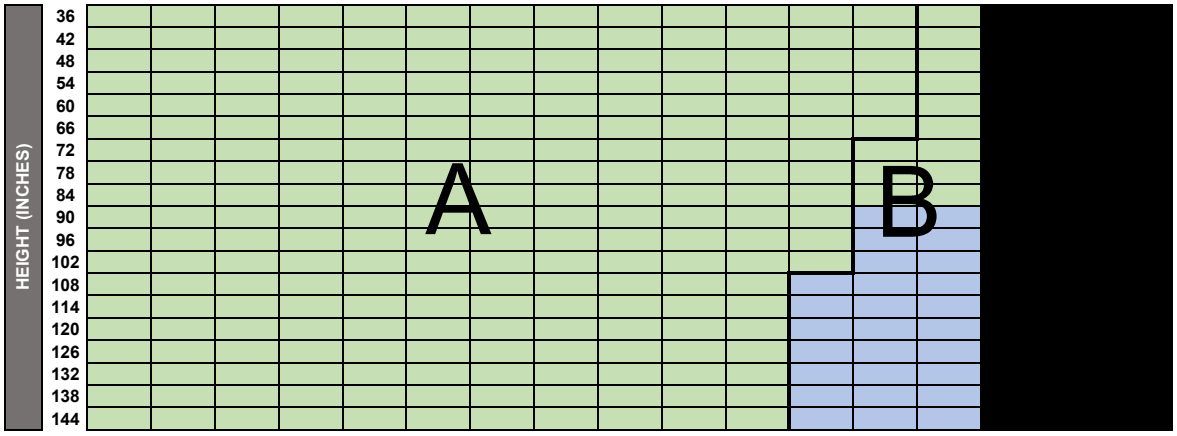


| Control Systems (Minimum height for all Control Systems is 12") | Minimium Width (Single Panel) | Minimum Height | Overall Minimium Width (2-on-1) | Specification Zone(s) |
|---|---|---|---|---|
| Continuous Cord Loop (Maximum height for 12" width is 60") | 12" | 12" | 24" | A, B & C |
| InMotion™ Wand | 21" | 12" | 43" | A & B |
| InMotion™ | 21 1/2" | 12" | 44" | A & B |


No-Drill Headrail available on InMotion™ with Medium Cassette only: Minimum Width for InMotion Wand is 22 1/2" and for InMotion Minimum Width is 22". Minimum height for both is 12". Not available at all Retailers.

| Collection Code | Collection Name | Max Width Non-Railroaded | Max Width Railroaded | Available wIth Seam |
|---|---|---|---|---|
| LF033 | Brighton | 108" | N/A | No |

*Maximum width of continuous Deluxe Valance = Maximum published non-railroaded width less 8"
Maximum Width and Height for No-Drill Headrail is 84". Not available at all Retailers.

| Top Treatment | Legend | |
|---|---|---|
| Medium Cassette | | |
| Large Cassette | | |
| *Fabric Valance | | |
| Open Roll with Mounting Bar | | |

## Control System and Top Treatment Compatibility Chart - Perfect Placement™ Cordless

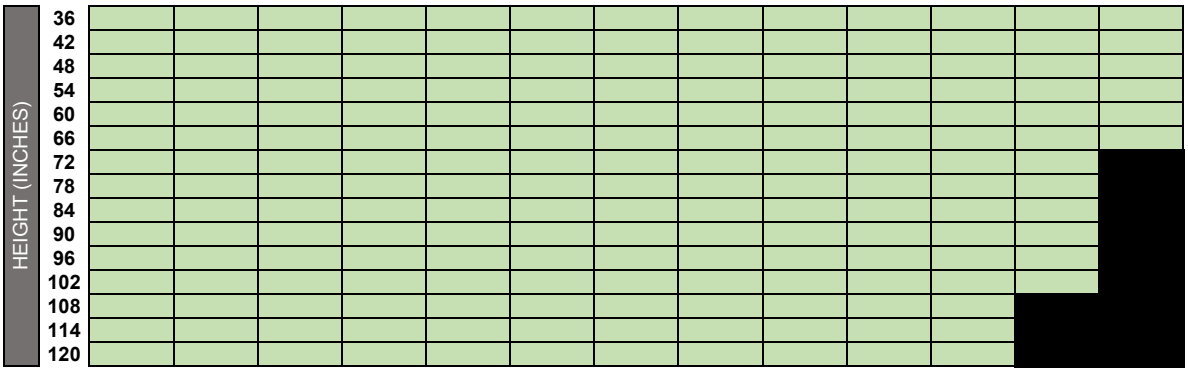


| Control Systems | Minimum Width (Single Panel) | Overall Minimum Width (2 on 1) | Minimum Height | Top Treatment |
|---|---|---|---|---|
| PerfectPlacement™ - Cordless | 18" | N/A | 24" | All |


No-Drill Headrail available on PerfectPlacement™ Cordless with Medium Cassette only: Minimum Width is 18 1/2". Minimum height is 24". Not available at all Retailers.

# PRODUCT SIZE SPECIFICATIONS

| Collection Code | Collection Name | Max Width Non-Railroaded | Max Width Railroaded | Available with Seam |
|---|---|---|---|---|
| LF046 | Chelsea | 118" | N/A | No |

- Railroad Fabrics (turned width for length) will have a visible seam when fabricated longer than the maximum roll width less 16".
- **Red Box** in spec chart indicates shade sizes Heat Sealed Hem Bar for these sizes.
- Maximum width of continuous Fabric Valance = Maximum published non-railroaded width less 8"
- Maximum Width and Height for No-Drill Headrail is 84". Not available at all Retailers.

| Top Treatment | Legend | | |
|---|---|---|---|
| Medium Cassette | | | |
| Large Cassette | | | |
| Fabric Valance | | | |
| Open Roll | | | |

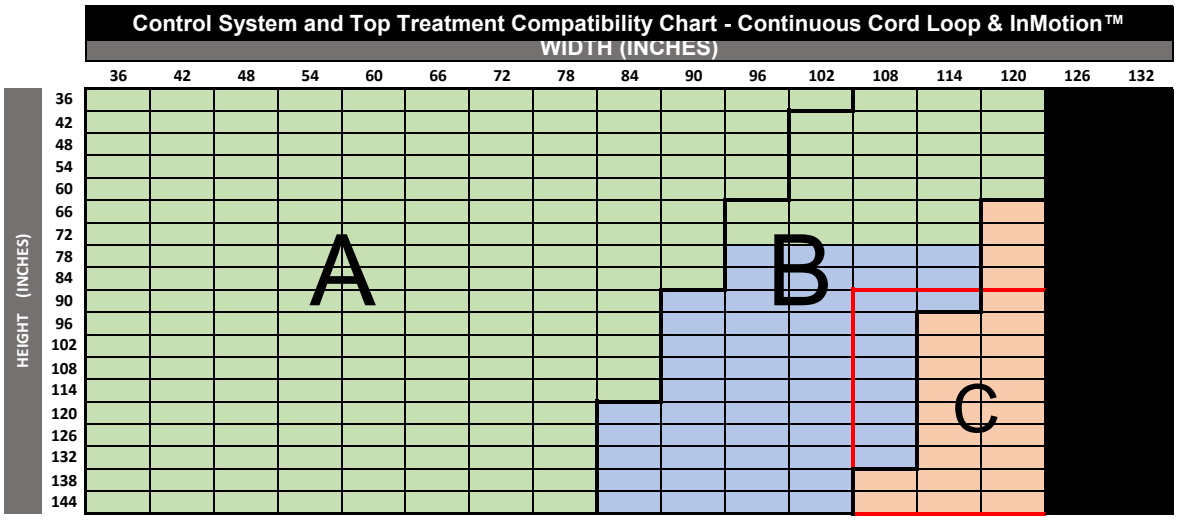



| Control Systems (Minimum height for all Control Systems is 12") | Minimum Width (Single Panel) | Minimum Height | Overall Minimum Width (2-on-1) | Specification Zone(s) |
|---|---|---|---|---|
| Continuous Cord Loop (Maximum height for 12" width is 60") | 12" | 12" | 24" | A, B & C |
| InMotion™ Wand | 21" | 12" | 43" | A & B |
| InMotion™ | 21 1/2" | 12" | 44" | A & B |

No-Drill Headrail available on InMotion™ with Medium Cassette only: Minimum Width for InMotion Wand is 22 1/2" and for InMotion Minimum Width is 22". Minimum height for both is 12". Not available at all Retailers.

| Collection Code | Collection Name | Max Width Non-Railroaded | Max Width Railroaded | Available with Seam |
|---|---|---|---|---|
| LF046 | Chelsea | 108" | N/A | No |

*Maximum width of continuous Deluxe Valance = Maximum published non-railroaded width less 8"
Maximum Width and Height for No-Drill Headrail is 84". Not available at all Retailers.

| Top Treatment | Legend | |
|---|---|---|
| Medium Cassette | | |
| Large Cassette | | |
| *Fabric Valance | | |
| Open Roll with Mounting Bar | | |

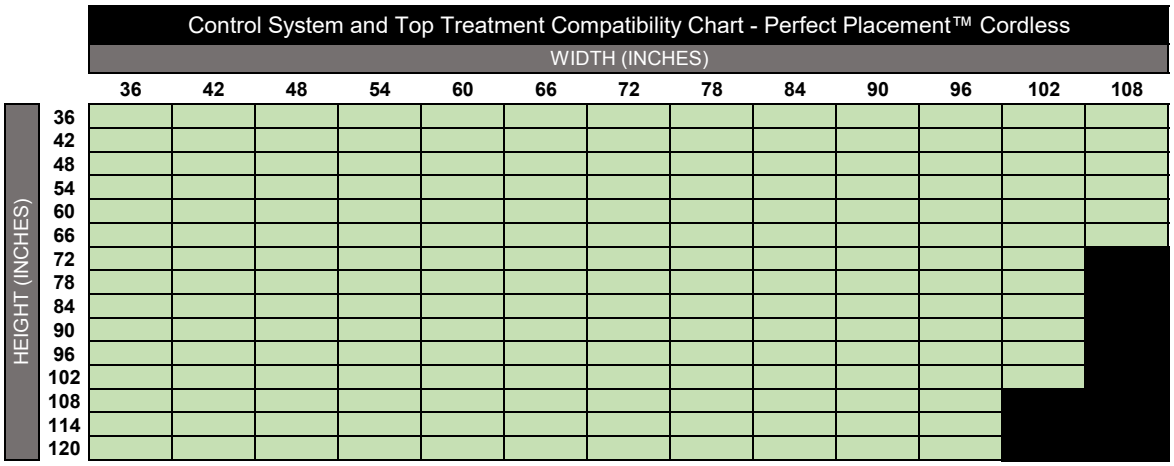


| Control Systems | Minimum Width (Single Panel) | Overall Minimum Width (2 on 1) | Minimum Height | Top Treatment |
|---|---|---|---|---|
| PerfectPlacement™ - Cordless | 18" | N/A | 24" | All |

No-Drill Headrail available on PerfectPlacement™ Cordless with Medium Cassette only: Minimum Width is 18 1/2". Minimum height is 24". Not available at all Retailers.


# PRODUCT SIZE SPECIFICATIONS

| Collection Code | Collection Name | Max Width Non-Railroaded | Max Width Railroaded | Available with Seam |
|---|---|---|---|---|
| LB046 | Chelsea Blackout | 118" | N/A | No |

- Railroad Fabrics (turned width for length) will have a visible seam when fabricated longer than the maximum roll width less 16".
- **Red Box** in spec chart indicates shade sizes Heat Sealed Hem Bar for these sizes.
- Maximum width of continuous Fabric Valance = Maximum published non-railroaded width less 8"
- Maximum Width and Height for No-Drill Headrail is 84". Not available at all Retailers.

| Top Treatment | Legend | | |
|---|---|---|---|
| Medium Cassette | | | |
| Large Cassette | | | |
| Fabric Valance | | | |
| Open Roll | | | |

## Control System and Top Treatment Compatibility Chart - Continuous Cord Loop & InMotion™

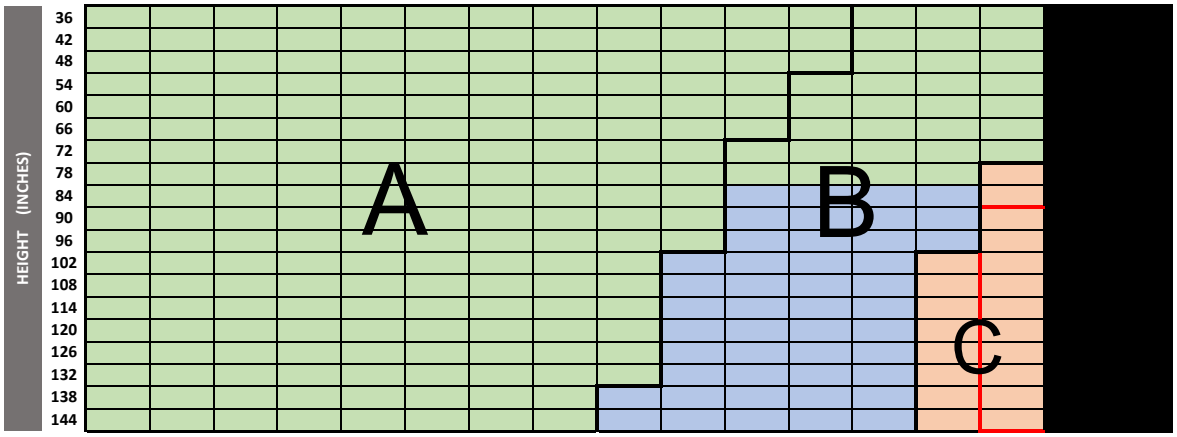


| Control Systems (Minimum height for all Control Systems is 12") | Minimium Width (Single Panel) | Minimum Height | Overall Minimium Width (2-on-1) | Specification Zone(s) |
|---|---|---|---|---|
| Continuous Cord Loop (Maximum height for 12" width is 60") | 12" | 12" | 24" | A, B & C |
| InMotion™ Wand | 21" | 12" | 43" | A & B |
| InMotion™ | 21 1/2" | 12" | 44" | A & B |


No-Drill Headrail available on InMotion™ with Medium Cassette only: Minimum Width for InMotion Wand is 22 1/2" and for InMotion Minimum Width is 22". Minimum height for both is 12". Not available at all Retailers.

| Collection Code | Collection Name | Max Width Non-Railroaded | Max Width Railroaded | Available with Seam |
|---|---|---|---|---|
| LB046 | Chelsea Blackout | 102" | N/A | No |

*Maximum width of continuous Deluxe Valance = Maximum published non-railroaded width less 8"
Maximum Width and Height for No-Drill Headrail is 84". Not available at all Retailers.

| Top Treatment | Legend | |
|---|---|---|
| Medium Cassette | | |
| Large Cassette | | |
| *Fabric Valance | | |
| Open Roll with Mounting Bar | | |

## Control System and Top Treatment Compatibility Chart - Perfect Placement™ Cordless

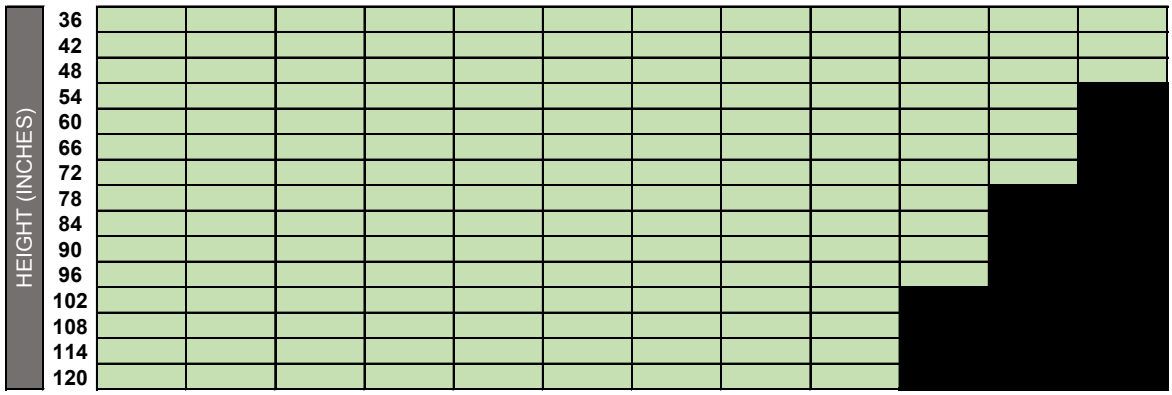


| Control Systems | Minimum Width (Single Panel) | Overall Minimum Width (2 on 1) | Minimum Height | Top Treatment |
|---|---|---|---|---|
| PerfectPlacement™ - Cordless | 18" | N/A | 24" | All |

No-Drill Headrail available on PerfectPlacement™ Cordless with Medium Cassette only: Minimum Width is 18 1/2". Minimum height is 24". Not available at all Retailers.


# PRODUCT SIZE SPECIFICATIONS

| Collection Code | Collection Name | Max Width Non-Railroaded | Max Width Railroaded | Available with Seam |
|---|---|---|---|---|
| LF055 | Finnley | 118" | N/A | No |

- Railroad Fabrics (turned width for length) will have a visible seam when fabricated longer than the maximum roll width less 16".
- **Red Box** in spec chart indicates shade sizes Heat Sealed Hem Bar for these sizes.
- Maximum width of continuous Fabric Valance = Maximum published non-railroaded width less 8"
- Maximum Width and Height for No-Drill Headrail is 84". Not available at all Retailers.

| Top Treatment | Legend | | |
|---|---|---|---|
| Medium Cassette | | | |
| Large Cassette | | | |
| Fabric Valance | | | |
| Open Roll | | | |

## Control System and Top Treatment Compatibility Chart - Continuous Cord Loop & InMotion™

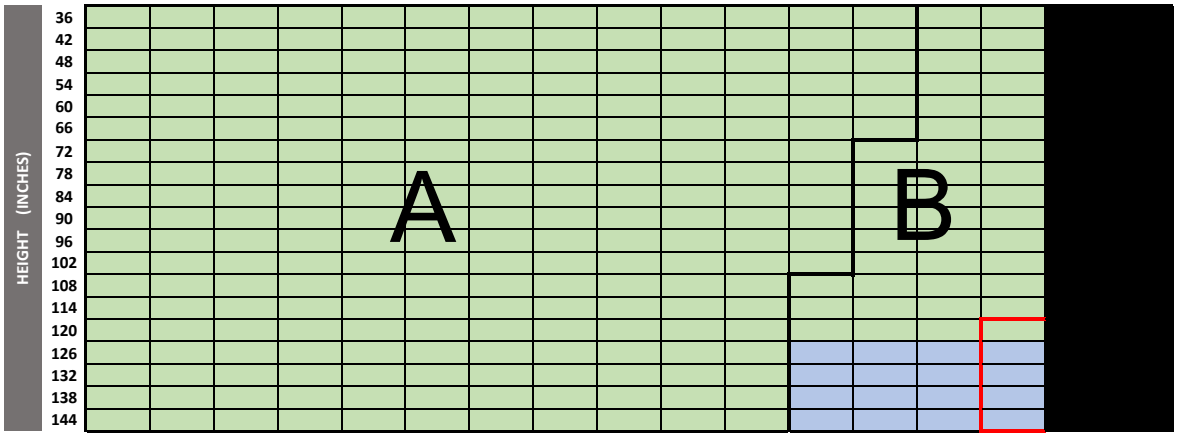


| Control Systems (Minimum height for all Control Systems is 12") | Minimum Width (Single Panel) | Minimum Height | Overall Minimium Width (2-on-1) | Specification Zone(s) |
|---|---|---|---|---|
| Continuous Cord Loop (Maximum height for 12" width is 60") | 12" | 12" | 24" | A, B & C |
| InMotion™ Wand | 21" | 12" | 43" | A & B |
| InMotion™ | 21 1/2" | 12" | 44" | A & B |


No-Drill Headrail available on InMotion™ with Medium Cassette only: Minimum Width for InMotion Wand is 22 1/2" and for InMotion Minimum Width is 22". Minimum height for both is 12". Not available at all Retailers.

| Collection Code | Collection Name | Max Width Non-Railroaded | Max Width Railroaded | Available with Seam |
|---|---|---|---|---|
| LF055 | Finnley | 108" | N/A | No |

*Maximum width of continuous Deluxe Valance = Maximum published non-railroaded width less 8"
Maximum Width and Height for No-Drill Headrail is 84". Not available at all Retailers.

| Top Treatment | Legend | |
|---|---|---|
| Medium Cassette | | |
| Large Cassette | | |
| *Fabric Valance | | |
| Open Roll with Mounting Bar | | |

## Control System and Top Treatment Compatibility Chart - Perfect Placement™ Cordless

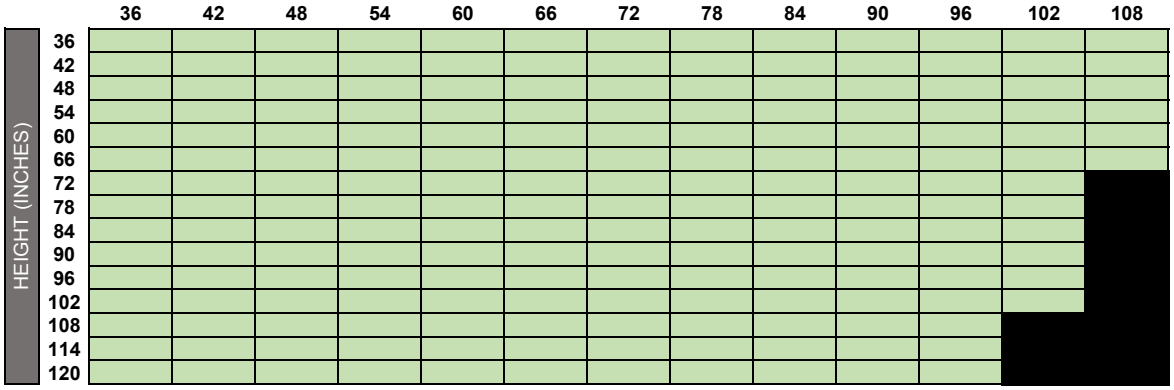


| Control Systems | Minimum Width (Single Panel) | Overall Minimum Width (2 on 1) | Minimum Height | Top Treatment |
|---|---|---|---|---|
| PerfectPlacement™ - Cordless | 18" | N/A | 24" | All |

No-Drill Headrail available on PerfectPlacement™ Cordless with Medium Cassette only: Minimum Width is 18 1/2". Minimum height is 24". Not available at all Retailers.


# PRODUCT SIZE SPECIFICATIONS

| Collection Code | Collection Name | Max Width Non-Railroaded | Max Width Railroaded | Available with Seam |
|---|---|---|---|---|
| LB055 | Finnley Blackout | 118" | N/A | No |

- Railroad Fabrics (turned width for length) will have a visible seam when fabricated longer than the maximum roll width less 16".
- **Red Box** in spec chart indicates shade sizes Heat Sealed Hem Bar for these sizes.
- Maximum width of continuous Fabric Valance = Maximum published non-railroaded width less 8"
- Maximum Width and Height for No-Drill Headrail is 84". Not available at all Retailers.

| Top Treatment | Legend | | |
|---|---|---|---|
| Medium Cassette | | | |
| Large Cassette | | | |
| Fabric Valance | | | |
| Open Roll | | | |

## Control System and Top Treatment Compatibility Chart - Continuous Cord Loop & InMotion™

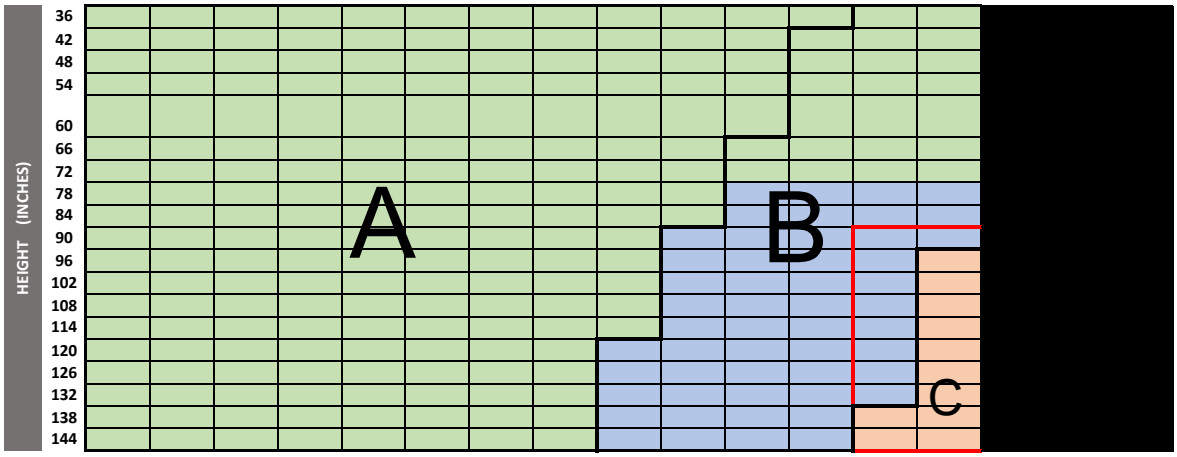


| Control Systems (Minimum height for all Control Systems is 12") | Minimium Width (Single Panel) | Minimum Height | Overall Minimium Width (2-on-1) | Specification Zone(s) |
|---|---|---|---|---|
| Continuous Cord Loop (Maximum height for 12" width is 60") | 12" | 12" | 24" | A, B & C |
| InMotion™ Wand | 21" | 12" | 43" | A & B |
| InMotion™ | 21 1/2" | 12" | 44" | A & B |


No-Drill Headrail available on InMotion™ with Medium Cassette only: Minimum Width for InMotion Wand is 22 1/2" and for InMotion Minimum Width is 22". Minimum height for both is 12". Not available at all Retailers.

| Collection Code | Collection Name | Max Width Non-Railroaded | Max Width Railroaded | Available with Seam |
|---|---|---|---|---|
| LB055 | Finnley Blackout | 102" | N/A | No |

*Maximum width of continuous Deluxe Valance = Maximum published non-railroaded width less 8"
Maximum Width and Height for No-Drill Headrail is 84". Not available at all Retailers.

| Top Treatment | Legend | |
|---|---|---|
| Medium Cassette | | |
| Large Cassette | | |
| *Fabric Valance | | |
| Open Roll with Mounting Bar | | |

## Control System and Top Treatment Compatibility Chart - Perfect Placement™ Cordless

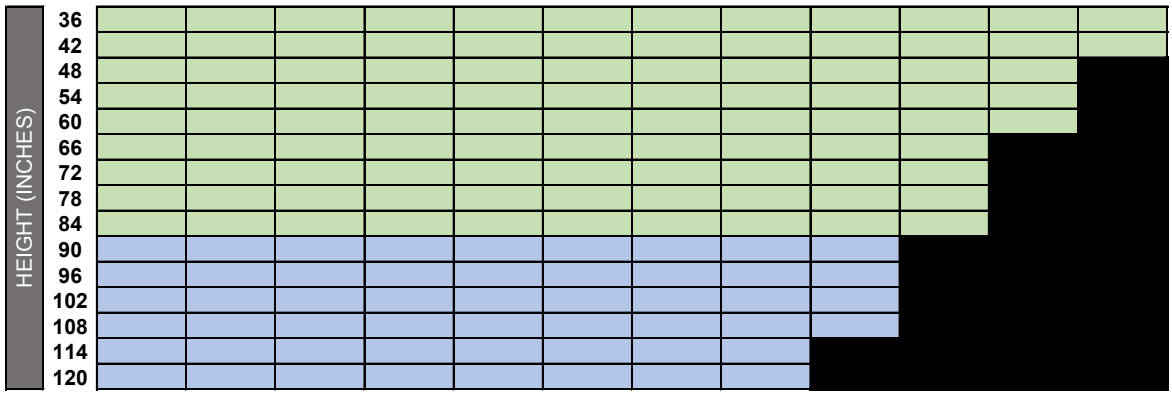


| Control Systems | Minimum Width (Single Panel) | Overall Minimum Width (2 on 1) | Minimum Height | Top Treatment |
|---|---|---|---|---|
| PerfectPlacement™ - Cordless | 18" | N/A | 24" | All |

No-Drill Headrail available on PerfectPlacement™ Cordless with Medium Cassette only: Minimum Width is 18 1/2". Minimum height is 24". Not available at all Retailers.


# PRODUCT SIZE SPECIFICATIONS

| Collection Code | Collection Name | Max Width Non-Railroaded | Max Width Railroaded | Available with Seam |
|---|---|---|---|---|
| LF050 | Kashia | 94" | N/A | No |

- Railroad Fabrics (turned width for length) will have a visible seam when fabricated longer than the maximum roll width less 16".
- **Red Box** in spec chart indicates shade sizes Heat Sealed Hem Bar for these sizes.
- Maximum width of continuous Fabric Valance = Maximum published non-railroaded width less 8"
- Maximum Width and Height for No-Drill Headrail is 84". Not available at all Retailers.

| Top Treatment | Legend | | |
|---|---|---|---|
| Medium Cassette | | | |
| Large Cassette | | | |
| Fabric Valance | | | |
| Open Roll | | | |

## Control System and Top Treatment Compatibility Chart - Continuous Cord Loop & InMotion™

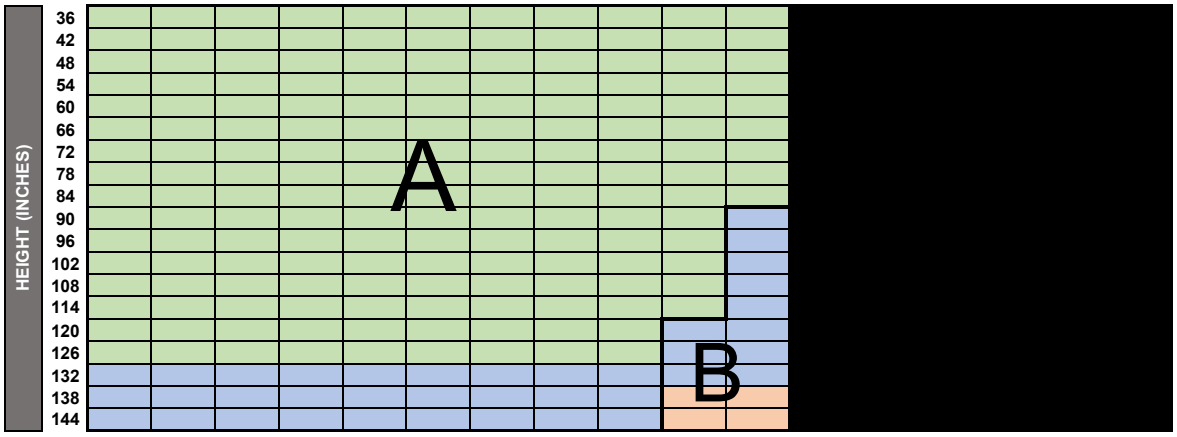


| Control Systems (Minimum height for all Control Systems is 12") | Minimium Width (Single Panel) | Minimum Height | Overall Minimium Width (2-on-1) | Specification Zone(s) |
|---|---|---|---|---|
| Continuous Cord Loop (Maximum height for 12" width is 60") | 12" | 12" | 24" | A, B & C |
| InMotion™ Wand | 21" | 12" | 43" | A & B |
| InMotion™ | 21 1/2" | 12" | 44" | A & B |


No-Drill Headrail available on InMotion™ with Medium Cassette only: Minimum Width for InMotion Wand is 22 1/2" and for InMotion Minimum Width is 22". Minimum height for both is 12". Not available at all Retailers.

| Collection Code | Collection Name | Max Width Non-Railroaded | Max Width Railroaded | Available with Seam |
|---|---|---|---|---|
| LF050 | Kashia | 94" | N/A | No |

*Maximum width of continuous Deluxe Valance = Maximum published non-railroaded width less 8"
Maximum Width and Height for No-Drill Headrail is 84". Not available at all Retailers.

| Top Treatment | Legend | |
|---|---|---|
| Medium Cassette | | |
| Large Cassette | | |
| *Fabric Valance | | |
| Open Roll with Mounting Bar | | |

## Control System and Top Treatment Compatibility Chart - Perfect Placement™ Cordless

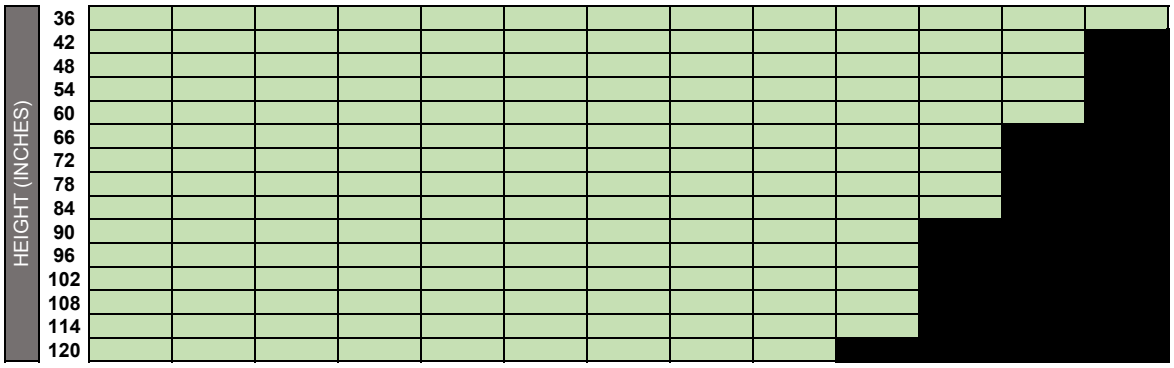


| Control Systems | Minimum Width (Single Panel) | Overall Minimum Width (2 on 1) | Minimum Height | Top Treatment |
|---|---|---|---|---|
| PerfectPlacement™ - Cordless | 18" | N/A | 24" | All |

No-Drill Headrail available on PerfectPlacement™ Cordless with Medium Cassette only: Minimum Width is 18 1/2". Minimum height is 24". Not available at all Retailers.


# PRODUCT SIZE SPECIFICATIONS

| Collection Code | Collection Name | Max Width Non-Railroaded | Max Width Railroaded | Available with Seam |
|---|---|---|---|---|
| LF018 | Madison | 110" | 132" | Yes |

- Railroad Fabrics (turned width for length) will have a visible seam when fabricated longer than the maximum roll width less 16".
- **Red Box** in spec chart indicates shade sizes Heat Sealed Hem Bar for these sizes.
- Maximum width of continuous Fabric Valance = Maximum published non-railroaded width less 8"
- Maximum Width and Height for No-Drill Headrail is 84". Not available at all Retailers.

| Top Treatment | Legend | | |
|---|---|---|---|
| Medium Cassette | | | |
| Large Cassette | | | |
| Fabric Valance | | | |
| Open Roll | | | |

## Control System and Top Treatment Compatibility Chart - Continuous Cord Loop & InMotion™

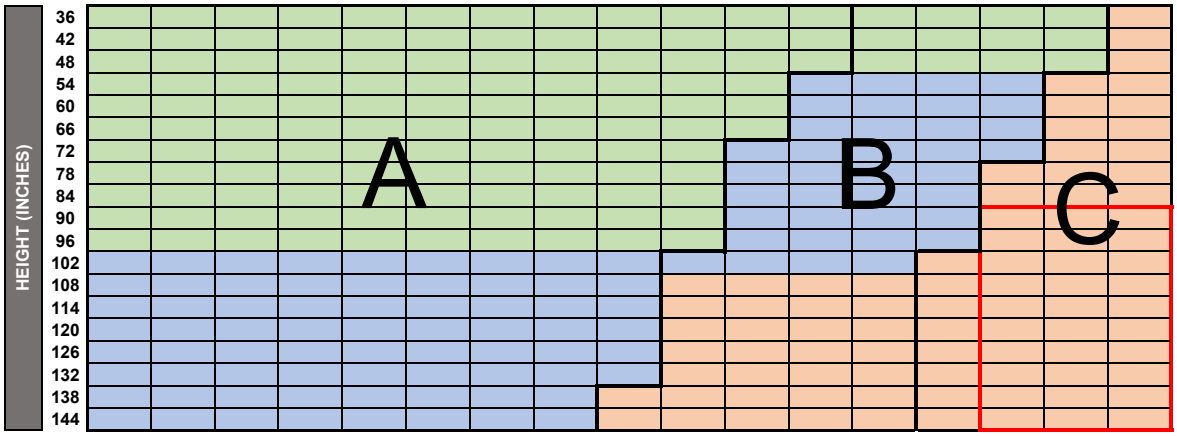


| Control Systems (Minimum height for all Control Systems is 12") | Minimium Width (Single Panel) | Minimum Height | Overall Minimium Width (2-on-1) | Specification Zone(s) |
|---|---|---|---|---|
| Continuous Cord Loop (Maximum height for 12" width is 60") | 12" | 12" | 24" | A, B & C |
| InMotion™ Wand | 21" | 12" | 43" | A & B |
| InMotion™ | 21 1/2" | 12" | 44" | A & B |


No-Drill Headrail available on InMotion™ with Medium Cassette only: Minimum Width for InMotion Wand is 22 1/2" and for InMotion Minimum Width is 22". Minimum height for both is 12". Not available at all Retailers.

| Collection Code | Collection Name | Max Width Non-Railroaded | Max Width Railroaded | Available with Seam |
|---|---|---|---|---|
| LF018 | Madison | 102" | 102" | Yes |

*Maximum width of continuous Deluxe Valance = Maximum published non-railroaded width less 8"
Maximum Width and Height for No-Drill Headrail is 84". Not available at all Retailers.

| Top Treatment | Legend | |
|---|---|---|
| Medium Cassette | | |
| Large Cassette | | |
| *Fabric Valance | | |
| Open Roll with Mounting Bar | | |

## Control System and Top Treatment Compatibility Chart - Perfect Placement™ Cordless

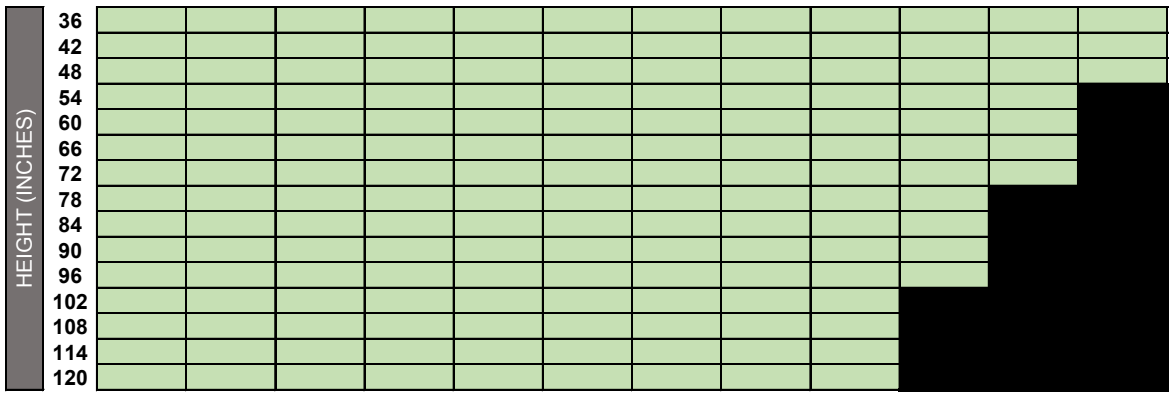


| Control Systems | Minimum Width (Single Panel) | Overall Minimum Width (2 on 1) | Minimum Height | Top Treatment |
|---|---|---|---|---|
| PerfectPlacement™ - Cordless | 18" | N/A | 24" | All |

No-Drill Headrail available on PerfectPlacement™ Cordless with Medium Cassette only: Minimum Width is 18 1/2". Minimum height is 24". Not available at all Retailers.


# PRODUCT SIZE SPECIFICATIONS

| Collection Code | Collection Name | Max Width Non-Railroaded | Max Width Railroaded | Available with Seam |
|---|---|---|---|---|
| LB018 | Madison Blackout | 110" | 132" | Yes |

- Railroad Fabrics (turned width for length) will have a visible seam when fabricated longer than the maximum roll width less 16".
- **Red Box** in spec chart indicates shade sizes Heat Sealed Hem Bar for these sizes.
- Maximum width of continuous Fabric Valance = Maximum published non-railroaded width less 8"
- Maximum Width and Height for No-Drill Headrail is 84". Not available at all Retailers.

| Top Treatment | Legend | | |
|---|---|---|---|
| Medium Cassette | | | |
| Large Cassette | | | |
| Fabric Valance | | | |
| Open Roll | | | |

## Control System and Top Treatment Compatibility Chart - Continuous Cord Loop & InMotion™

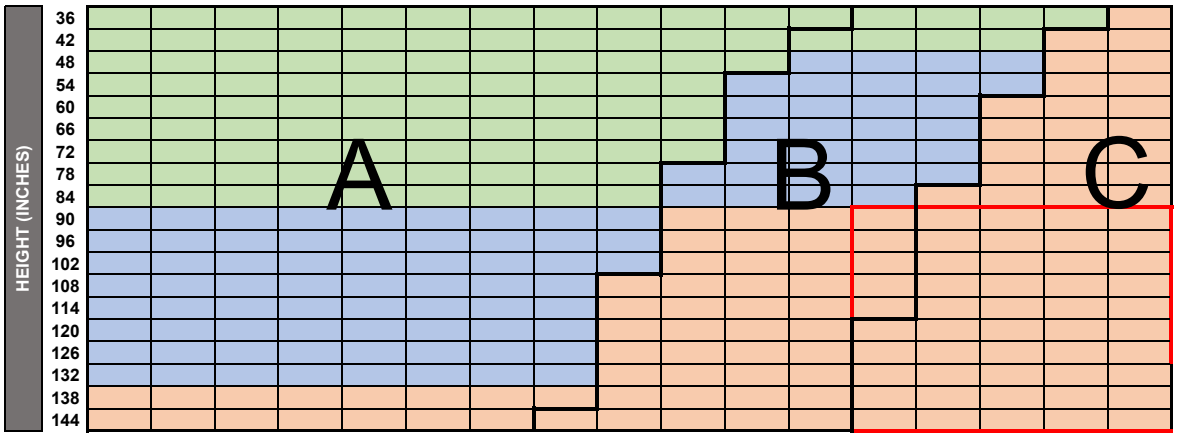


| Control Systems (Minimum height for all Control Systems is 12") | Minimium Width (Single Panel) | Minimum Height | Overall Minimium Width (2-on-1) | Specification Zone(s) |
|---|---|---|---|---|
| Continuous Cord Loop (Maximum height for 12" width is 60") | 12" | 12" | 24" | A, B & C |
| InMotion™ Wand | 21" | 12" | 43" | A & B |
| InMotion™ | 21 1/2" | 12" | 44" | A & B |


No-Drill Headrail available on InMotion™ with Medium Cassette only: Minimum Width for InMotion Wand is 22 1/2" and for InMotion Minimum Width is 22". Minimum height for both is 12". Not available at all Retailers.

| Collection Code | Collection Name | Max Width Non-Railroaded | Max Width Railroaded | Available with Seam |
|---|---|---|---|---|
| LB018 | Madison Blackout | 102" | 102" | No |

*Maximum width of continuous Deluxe Valance = Maximum published non-railroaded width less 8"
Maximum Width and Height for No-Drill Headrail is 84". Not available at all Retailers.

| Top Treatment | Legend | |
|---|---|---|
| Medium Cassette | | |
| Large Cassette | | |
| *Fabric Valance | | |
| Open Roll with Mounting Bar | | |

## Control System and Top Treatment Compatibility Chart - Perfect Placement™ Cordless

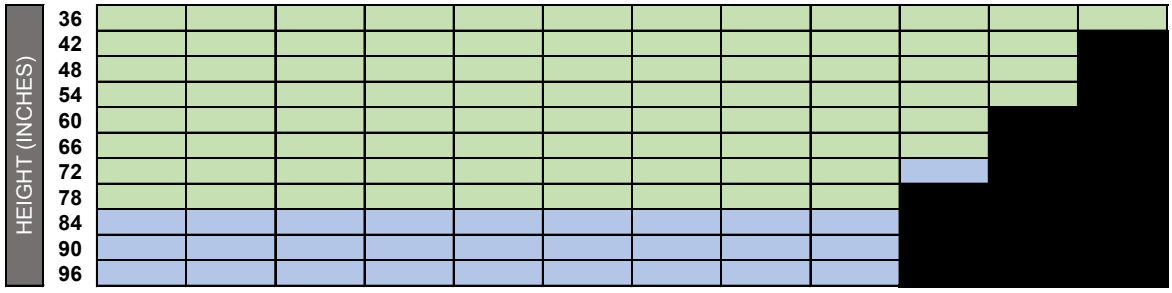


| Control Systems | Minimum Width (Single Panel) | Overall Minimum Width (2 on 1) | Minimum Height | Top Treatment |
|---|---|---|---|---|
| PerfectPlacement™ - Cordless | 18" | N/A | 24" | All |

No-Drill Headrail available on PerfectPlacement™ Cordless with Medium Cassette only: Minimum Width is 18 1/2". Minimum height is 24". Not available at all Retailers.


# PRODUCT SIZE SPECIFICATIONS

| Collection Code | Collection Name | Max Width Non-Railroaded | Max Width Railroaded | Available with Seam |
|---|---|---|---|---|
| LB057 | Midtown Blackout | 110" | 132" | Yes |

- Railroad Fabrics (turned width for length) will have a visible seam when fabricated longer than the maximum roll width less 16".
- **Red Box** in spec chart indicates shade sizes Heat Sealed Hem Bar for these sizes.
- Maximum width of continuous Fabric Valance = Maximum published non-railroaded width less 8"
- Maximum Width and Height for No-Drill Headrail is 84". Not available at all Retailers.

| Top Treatment | Legend | | |
|---|---|---|---|
| Medium Cassette | | | |
| Large Cassette | | | |
| Fabric Valance | | | |
| Open Roll | | | |

## Control System and Top Treatment Compatibility Chart - Continuous Cord Loop & InMotion™

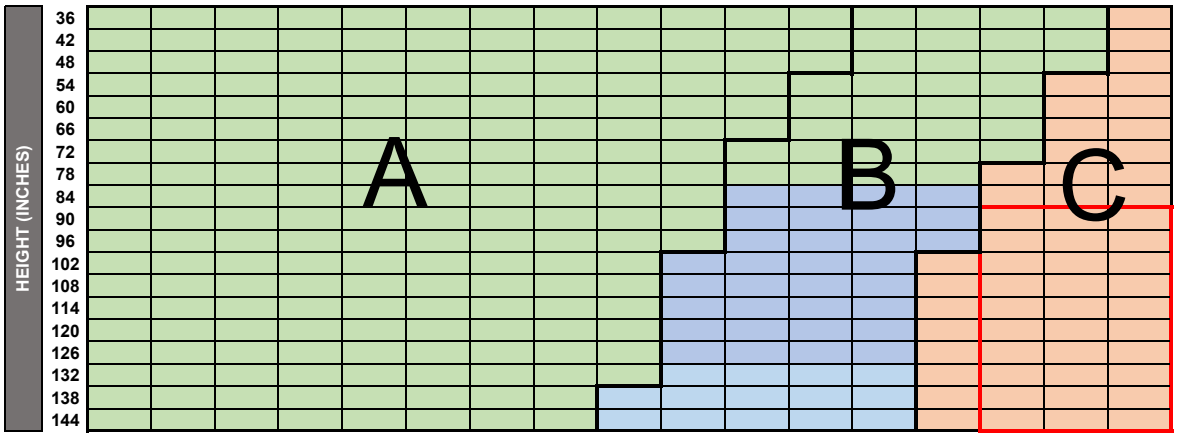


| Control Systems (Minimum height for all Control Systems is 12") | Minimium Width (Single Panel) | Minimum Height | Overall Minimium Width (2-on-1) | Specification Zone(s) |
|---|---|---|---|---|
| Continuous Cord Loop (Maximum height for 12" width is 60") | 12" | 12" | 24" | A, B & C |
| InMotion™ Wand | 21" | 12" | 43" | A & B |
| InMotion™ | 21 1/2" | 12" | 44" | A & B |


No-Drill Headrail available on InMotion™ with Medium Cassette only: Minimum Width for InMotion Wand is 22 1/2" and for InMotion Minimum Width is 22". Minimum height for both is 12". Not available at all Retailers.

| Collection Code | Collection Name | Max Width Non-Railroaded | Max Width Railroaded | Available with Seam |
|---|---|---|---|---|
| LB057 | Midtown Blackout | 102" | 102" | Yes |

*Maximum width of continuous Deluxe Valance = Maximum published non-railroaded width less 8"
Maximum Width and Height for No-Drill Headrail is 84". Not available at all Retailers.

| Top Treatment | Legend | |
|---|---|---|
| Medium Cassette | | |
| Large Cassette | | |
| *Fabric Valance | | |
| Open Roll with Mounting Bar | | |

## Control System and Top Treatment Compatibility Chart - Perfect Placement™ Cordless

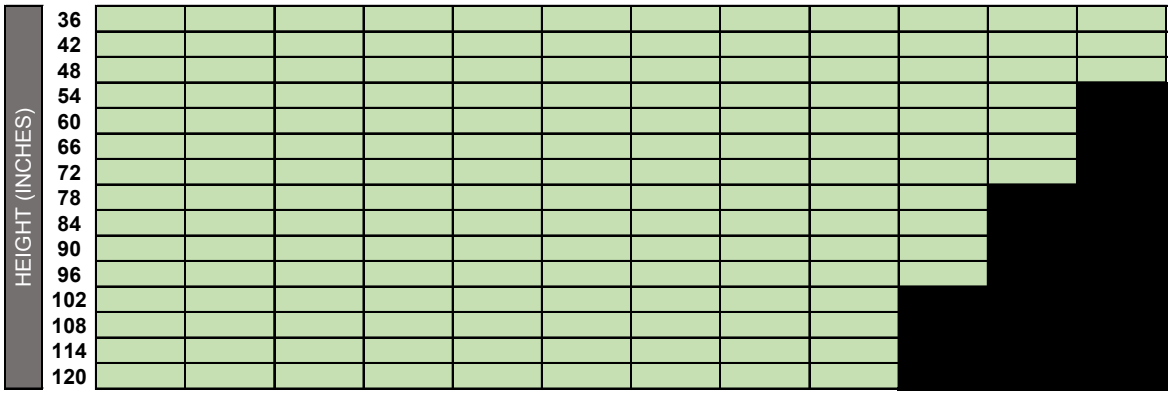


| Control Systems | Minimum Width (Single Panel) | Overall Minimum Width (2 on 1) | Minimum Height | Top Treatment |
|---|---|---|---|---|
| PerfectPlacement™ - Cordless | 18" | N/A | 24" | All |

No-Drill Headrail available on PerfectPlacement™ Cordless with Medium Cassette only: Minimum Width is 18 1/2". Minimum height is 24". Not available at all Retailers.


# PRODUCT SIZE SPECIFICATIONS

| Collection Code | Collection Name | Max Width Non-Railroaded | Max Width Railroaded | Available with Seam |
|---|---|---|---|---|
| LF051 | Monte Vista | 94" | N/A | No |

- Railroad Fabrics (turned width for length) will have a visible seam when fabricated longer than the maximum roll width less 16".
- **Red Box** in spec chart indicates shade sizes Heat Sealed Hem Bar for these sizes.
- Maximum width of continuous Fabric Valance = Maximum published non-railroaded width less 8"
- Maximum Width and Height for No-Drill Headrail is 84". Not available at all Retailers.

| Top Treatment | Legend | | |
|---|---|---|---|
| Medium Cassette | | | |
| Large Cassette | | | |
| Fabric Valance | | | |
| Open Roll | | | |

## Control System and Top Treatment Compatibility Chart - Continuous Cord Loop & InMotion™

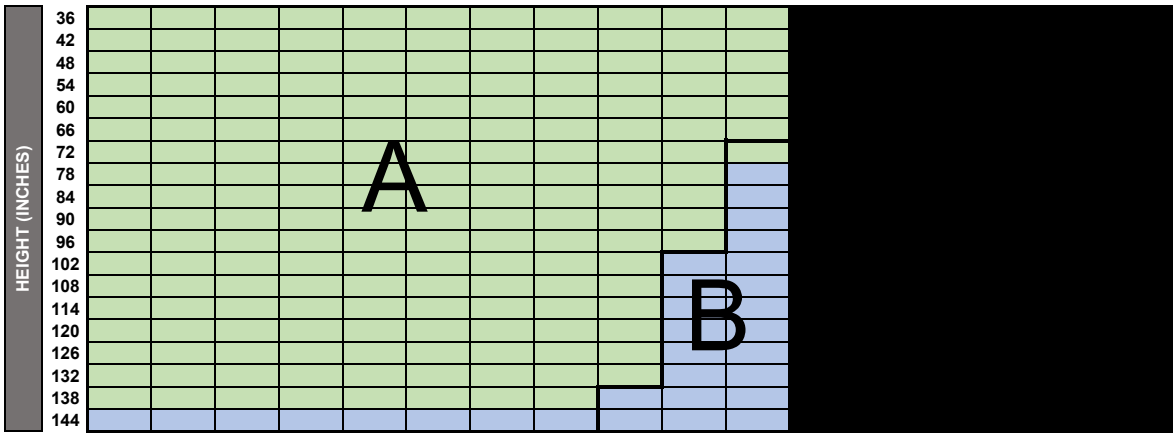


| Control Systems (Minimum height for all Control Systems is 12") | Minimium Width (Single Panel) | Minimum Height | Overall Minimium Width (2-on-1) | Specification Zone(s) |
|---|---|---|---|---|
| Continuous Cord Loop (Maximum height for 12" width is 60") | 12" | 12" | 24" | A, B & C |
| InMotion™ Wand | 21" | 12" | 43" | A & B |
| InMotion™ | 21 1/2" | 12" | 44" | A & B |


No-Drill Headrail available on InMotion™ with Medium Cassette only: Minimum Width for InMotion Wand is 22 1/2" and for InMotion Minimum Width is 22". Minimum height for both is 12". Not available at all Retailers.

| Collection Code | Collection Name | Max Width Non-Railroaded | Max Width Railroaded | Available with Seam |
|---|---|---|---|---|
| LF051 | Monte Vista | 94" | N/A | No |

*Maximum width of continuous Deluxe Valance = Maximum published non-railroaded width less 8"
Maximum Width and Height for No-Drill Headrail is 84". Not available at all Retailers.

| Top Treatment | Legend | |
|---|---|---|
| Medium Cassette | | |
| Large Cassette | | |
| *Fabric Valance | | |
| Open Roll with Mounting Bar | | |

## Control System and Top Treatment Compatibility Chart - Perfect Placement™ Cordless

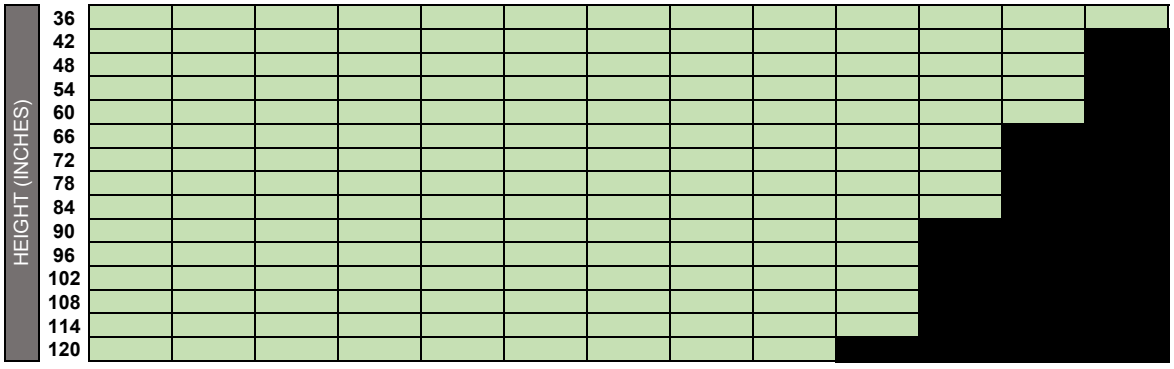


| Control Systems | Minimum Width (Single Panel) | Overall Minimum Width (2 on 1) | Minimum Height | Top Treatment |
|---|---|---|---|---|
| PerfectPlacement™ - Cordless | 18" | N/A | 24" | All |

No-Drill Headrail available on PerfectPlacement™ Cordless with Medium Cassette only: Minimum Width is 18 1/2". Minimum height is 24". Not available at all Retailers.


# PRODUCT SIZE SPECIFICATIONS

| Collection Code | Collection Name | Max Width Non-Railroaded | Max Width Railroaded | Available with Seam |
|---|---|---|---|---|
| LB051 | Monte Vista Blackout | 94" | N/A | No |

- Railroad Fabrics (turned width for length) will have a visible seam when fabricated longer than the maximum roll width less 16".
- **Red Box** in spec chart indicates shade sizes Heat Sealed Hem Bar for these sizes.
- Maximum width of continuous Fabric Valance = Maximum published non-railroaded width less 8"
- Maximum Width and Height for No-Drill Headrail is 84". Not available at all Retailers.

| Top Treatment | Legend | | |
|---|---|---|---|
| Medium Cassette | | | |
| Large Cassette | | | |
| Fabric Valance | | | |
| Open Roll | | | |

## Control System and Top Treatment Compatibility Chart - Continuous Cord Loop & InMotion™

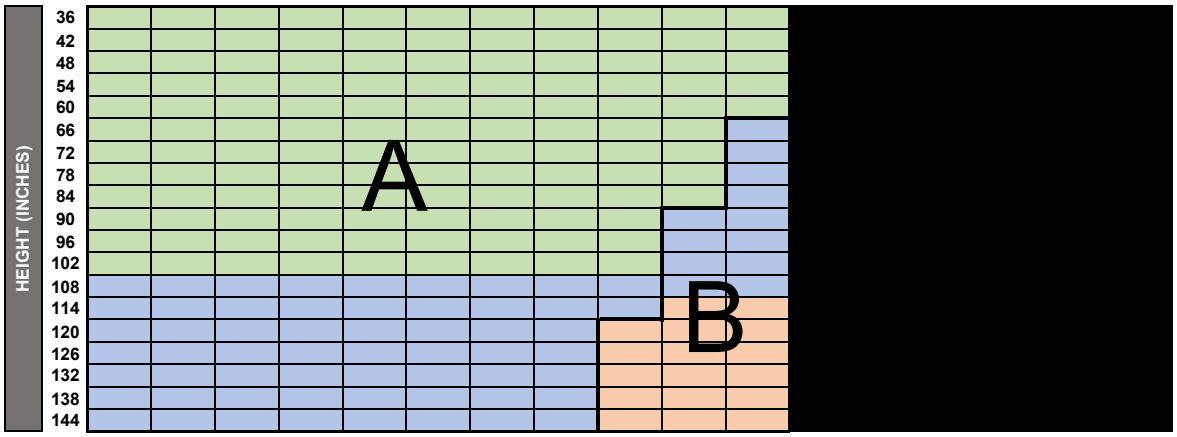


| Control Systems (Minimum height for all Control Systems is 12") | Minimum Width (Single Panel) | Minimum Height | Overall Minimum Width (2-on-1) | Specification Zone(s) |
|---|---|---|---|---|
| Continuous Cord Loop (Maximum height for 12" width is 60") | 12" | 12" | 24" | A, B & C |
| InMotion™ Wand | 21" | 12" | 43" | A & B |
| InMotion™ | 21 1/2" | 12" | 44" | A & B |


No-Drill Headrail available on InMotion™ with Medium Cassette only: Minimum Width for InMotion Wand is 22 1/2" and for InMotion Minimum Width is 22". Minimum height for both is 12". Not available at all Retailers.

| Collection Code | Collection Name | Max Width Non-Railroaded | Max Width Railroaded | Available with Seam |
|---|---|---|---|---|
| LB051 | Monte Vista Blackout | 94" | N/A | No |

*Maximum width of continuous Deluxe Valance = Maximum published non-railroaded width less 8"
Maximum Width and Height for No-Drill Headrail is 84". Not available at all Retailers.

| Top Treatment | Legend | |
|---|---|---|
| Medium Cassette | | |
| Large Cassette | | |
| *Fabric Valance | | |
| Open Roll with Mounting Bar | | |

## Control System and Top Treatment Compatibility Chart - Perfect Placement™ Cordless

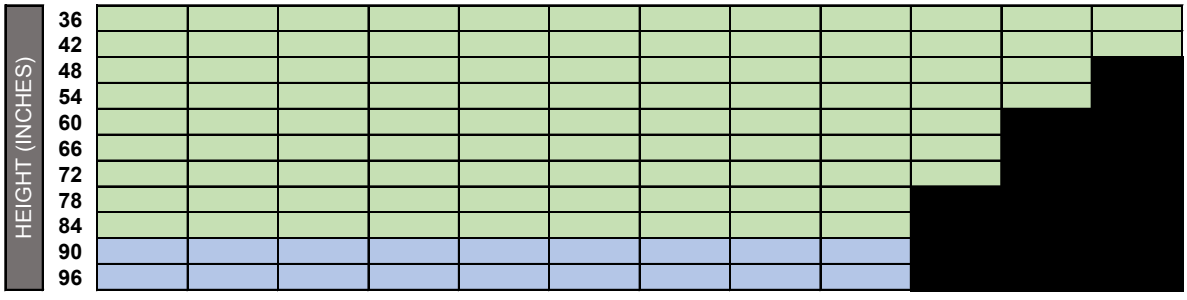


| Control Systems | Minimum Width (Single Panel) | Overall Minimum Width (2 on 1) | Minimum Height | Top Treatment |
|---|---|---|---|---|
| PerfectPlacement™ - Cordless | 18" | N/A | 24" | All |

No-Drill Headrail available on PerfectPlacement™ Cordless with Medium Cassette only: Minimum Width is 18 1/2". Minimum height is 24". Not available at all Retailers.


# PRODUCT SIZE SPECIFICATIONS

| Collection Code | Collection Name | Max Width Non-Railroaded | Max Width Railroaded | Available with Seam |
|---|---|---|---|---|
| LF056 | Oxford | 94" | N/A | No |

- Railroad Fabrics (turned width for length) will have a visible seam when fabricated longer than the maximum roll width less 16".
- **Red Box** in spec chart indicates shade sizes Heat Sealed Hem Bar for these sizes.
- Maximum width of continuous Fabric Valance = Maximum published non-railroaded width less 8"
- Maximum Width and Height for No-Drill Headrail is 84". Not available at all Retailers.

| Top Treatment | Legend | | |
|---|---|---|---|
| Medium Cassette | | | |
| Large Cassette | | | |
| Fabric Valance | | | |
| Open Roll | | | |

## Control System and Top Treatment Compatibility Chart - Continuous Cord Loop & InMotion™

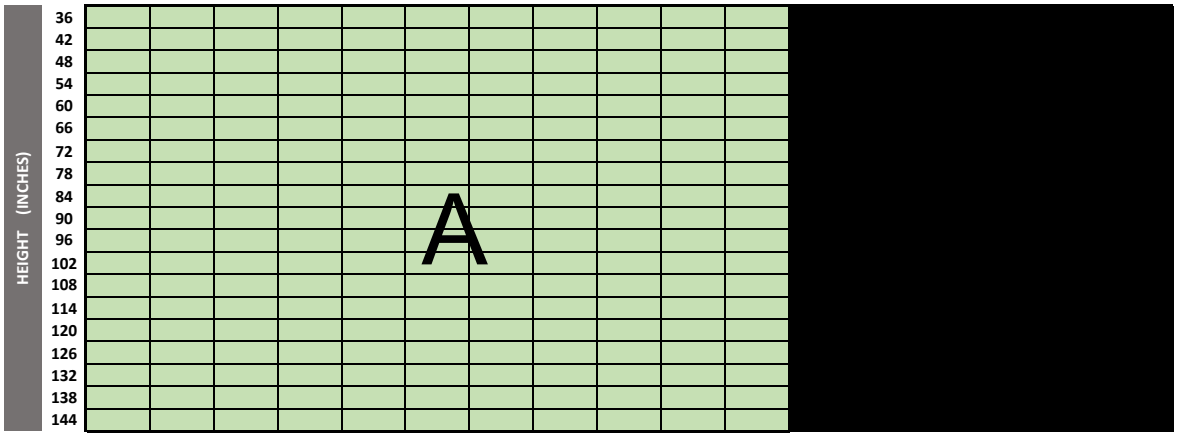


| Control Systems (Minimum height for all Control Systems is 12") | Minimium Width (Single Panel) | Minimum Height | Overall Minimium Width (2-on-1) | Specification Zone(s) |
|---|---|---|---|---|
| Continuous Cord Loop (Maximum height for 12" width is 60") | 12" | 12" | 24" | A, B & C |
| InMotion™ Wand | 21" | 12" | 43" | A & B |
| InMotion™ | 21 1/2" | 12" | 44" | A & B |


No-Drill Headrail available on InMotion™ with Medium Cassette only: Minimum Width for InMotion Wand is 22 1/2" and for InMotion Minimum Width is 22". Minimum height for both is 12". Not available at all Retailers.

| Collection Code | Collection Name | Max Width Non-Railroaded | Max Width Railroaded | Available with Seam |
|---|---|---|---|---|
| LF056 | Oxford | 94" | N/A | No |

*Maximum width of continuous Deluxe Valance = Maximum published non-railroaded width less 8"
Maximum Width and Height for No-Drill Headrail is 84". Not available at all Retailers.

| Top Treatment | Legend | |
|---|---|---|
| Medium Cassette | | |
| Large Cassette | | |
| *Fabric Valance | | |
| Open Roll with Mounting Bar | | |

## Control System and Top Treatment Compatibility Chart - Perfect Placement™ Cordless

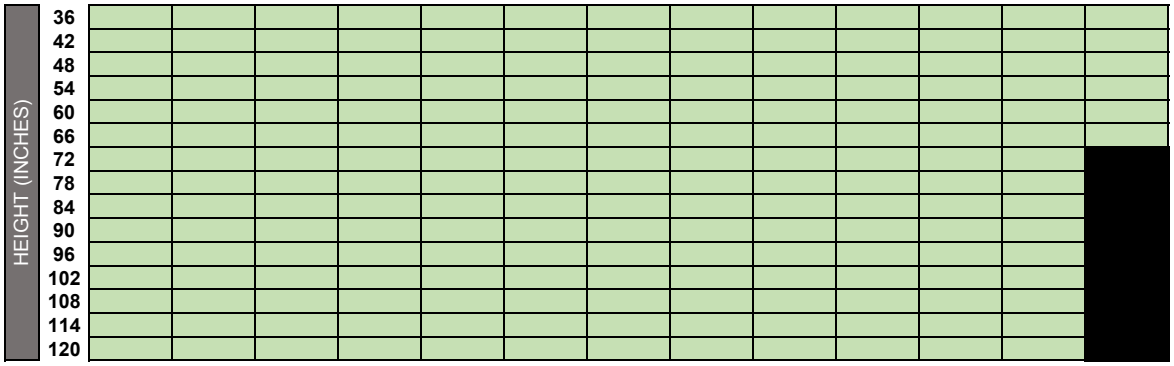


| Control Systems | Minimum Width (Single Panel) | Overall Minimum Width (2 on 1) | Minimum Height | Top Treatment |
|---|---|---|---|---|
| PerfectPlacement™ - Cordless | 18" | N/A | 24" | All |

No-Drill Headrail available on PerfectPlacement™ Cordless with Medium Cassette only: Minimum Width is 18 1/2". Minimum height is 24". Not available at all Retailers.


# PRODUCT SIZE SPECIFICATIONS

| Collection Code | Collection Name | Max Width Non-Railroaded | Max Width Railroaded | Available with Seam |
|---|---|---|---|---|
| LB056 | Oxford Blackout | 118" | N/A | No |

- Railroad Fabrics (turned width for length) will have a visible seam when fabricated longer than the maximum roll width less 16".
- **Red Box** in spec chart indicates shade sizes Heat Sealed Hem Bar for these sizes.
- Maximum width of continuous Fabric Valance = Maximum published non-railroaded width less 8"
- Maximum Width and Height for No-Drill Headrail is 84". Not available at all Retailers.

| Top Treatment | Legend | | |
|---|---|---|---|
| Medium Cassette | | | |
| Large Cassette | | | |
| Fabric Valance | | | |
| Open Roll | | | |

## Control System and Top Treatment Compatibility Chart - Continuous Cord Loop & InMotion™

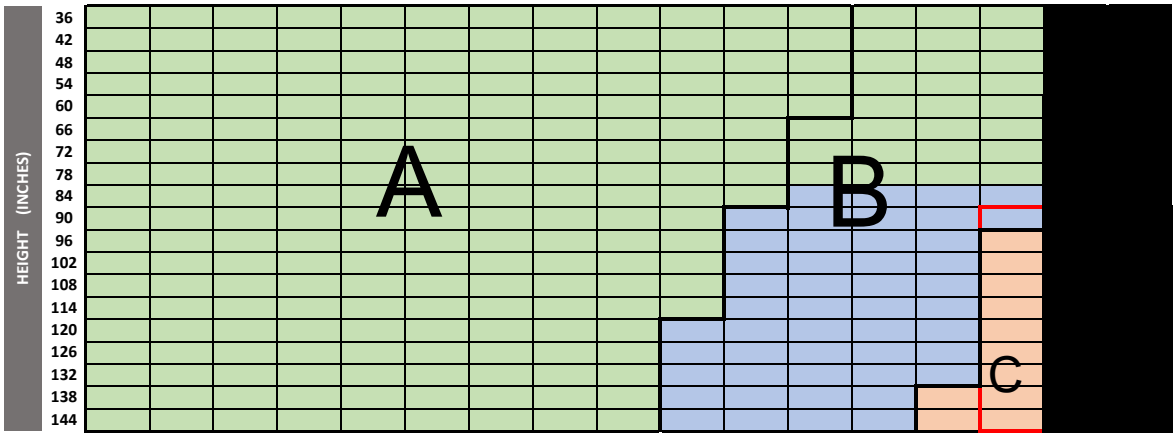


| Control Systems (Minimum height for all Control Systems is 12") | Minimium Width (Single Panel) | Minimum Height | Overall Minimium Width (2-on-1) | Specification Zone(s) |
|---|---|---|---|---|
| Continuous Cord Loop (Maximum height for 12" width is 60") | 12" | 12" | 24" | A, B & C |
| InMotion™ Wand | 21" | 12" | 43" | A & B |
| InMotion™ | 21 1/2" | 12" | 44" | A & B |


No-Drill Headrail available on InMotion™ with Medium Cassette only: Minimum Width for InMotion Wand is 22 1/2" and for InMotion Minimum Width is 22". Minimum height for both is 12". Not available at all Retailers.

| Collection Code | Collection Name | Max Width Non-Railroaded | Max Width Railroaded | Available with Seam |
|---|---|---|---|---|
| LB056 | Oxford Blackout | 94" | N/A | No |

*Maximum width of continuous Deluxe Valance = Maximum published non-railroaded width less 8"
Maximum Width and Height for No-Drill Headrail is 84". Not available at all Retailers.

| Top Treatment | Legend | |
|---|---|---|
| Medium Cassette | | |
| Large Cassette | | |
| *Fabric Valance | | |
| Open Roll with Mounting Bar | | |

## Control System and Top Treatment Compatibility Chart - Perfect Placement™ Cordless

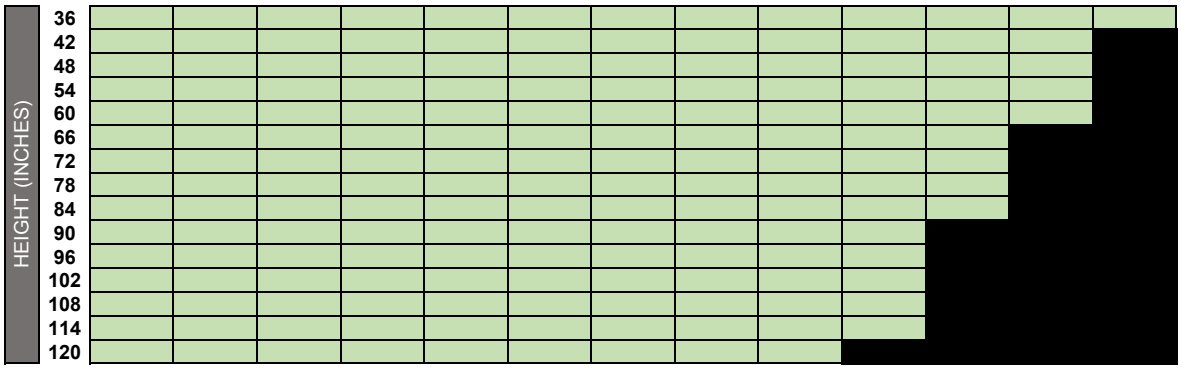


| Control Systems | Minimum Width (Single Panel) | Overall Minimum Width (2 on 1) | Minimum Height | Top Treatment |
|---|---|---|---|---|
| PerfectPlacement™ - Cordless | 18" | N/A | 24" | All |

No-Drill Headrail available on PerfectPlacement™ Cordless with Medium Cassette only: Minimum Width is 18 1/2". Minimum height is 24". Not available at all Retailers.


# PRODUCT SIZE SPECIFICATIONS

| Collection Code | Collection Name | Max Width Non-Railroaded | Max Width Railroaded | Available with Seam |
|---|---|---|---|---|
| LF027 | Providence | 113" | N/A | No |

- Railroad Fabrics (turned width for length) will have a visible seam when fabricated longer than the maximum roll width less 16".
- **Red Box** in spec chart indicates shade sizes Heat Sealed Hem Bar for these sizes.
- Maximum width of continuous Fabric Valance = Maximum published non-railroaded width less 8"
- Maximum Width and Height for No-Drill Headrail is 84". Not available at all Retailers.

| Top Treatment | Legend | | |
|---|---|---|---|
| Medium Cassette | | | |
| Large Cassette | | | |
| Fabric Valance | | | |
| Open Roll | | | |

## Control System and Top Treatment Compatibility Chart - Continuous Cord Loop & InMotion™

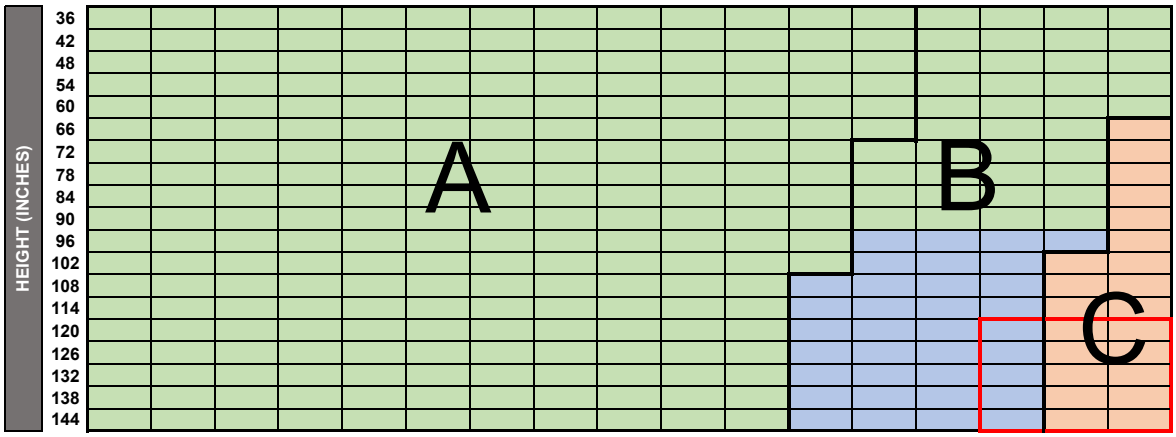


| Control Systems (Minimum height for all Control Systems is 12") | Minimum Width (Single Panel) | Minimum Height | Overall Minimum Width (2-on-1) | Specification Zone(s) |
|---|---|---|---|---|
| Continuous Cord Loop (Maximum height for 12" width is 60") | 12" | 12" | 24" | A, B & C |
| InMotion™ Wand | 21" | 12" | 43" | A & B |
| InMotion™ | 21 1/2" | 12" | 44" | A & B |


No-Drill Headrail available on InMotion™ with Medium Cassette only: Minimum Width for InMotion Wand is 22 1/2" and for InMotion Minimum Width is 22". Minimum height for both is 12". Not available at all Retailers.

| Collection Code | Collection Name | Max Width Non-Railroaded | Max Width Railroaded | Available with Seam |
|---|---|---|---|---|
| LF027 | Providence | 108" | N/A | No |

*Maximum width of continuous Deluxe Valance = Maximum published non-railroaded width less 8"
Maximum Width and Height for No-Drill Headrail is 84". Not available at all Retailers.

| Top Treatment | Legend | |
|---|---|---|
| Medium Cassette | | |
| Large Cassette | | |
| *Fabric Valance | | |
| Open Roll with Mounting Bar | | |

## Control System and Top Treatment Compatibility Chart - Perfect Placement™ Cordless

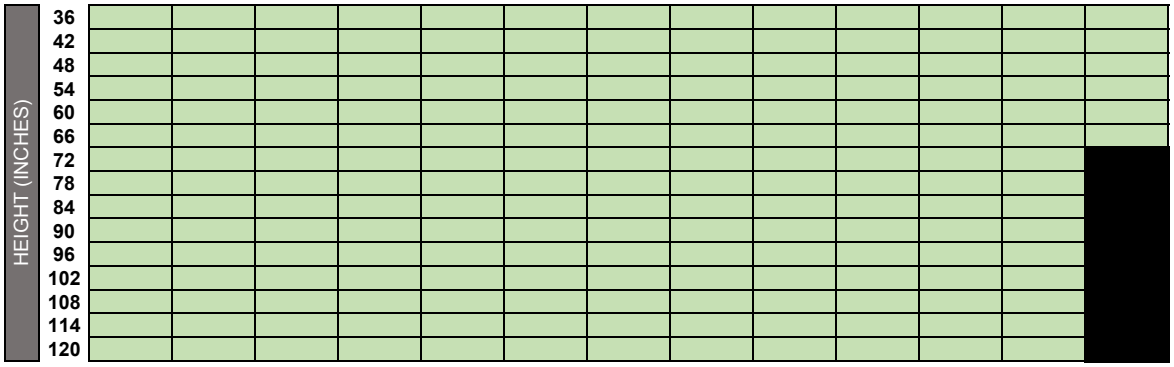


| Control Systems | Minimum Width (Single Panel) | Overall Minimum Width (2 on 1) | Minimum Height | Top Treatment |
|---|---|---|---|---|
| PerfectPlacement™ - Cordless | 18" | N/A | 24" | All |

No-Drill Headrail available on PerfectPlacement™ Cordless with Medium Cassette only: Minimum Width is 18 1/2". Minimum height is 24". Not available at all Retailers.


# PRODUCT SIZE SPECIFICATIONS

| Collection Code | Collection Name | Max Width Non-Railroaded | Max Width Railroaded | Available with Seam |
|---|---|---|---|---|
| LB027 | Providence Blackout | 113" | N/A | No |

- Railroad Fabrics (turned width for length) will have a visible seam when fabricated longer than the maximum roll width less 16".
- **Red Box** in spec chart indicates shade sizes Heat Sealed Hem Bar for these sizes.
- Maximum width of continuous Fabric Valance = Maximum published non-railroaded width less 8"
- Maximum Width and Height for No-Drill Headrail is 84". Not available at all Retailers.

| Top Treatment | Legend | | |
|---|---|---|---|
| Medium Cassette | | | |
| Large Cassette | | | |
| Fabric Valance | | | |
| Open Roll | | | |

## Control System and Top Treatment Compatibility Chart - Continuous Cord Loop & InMotion™

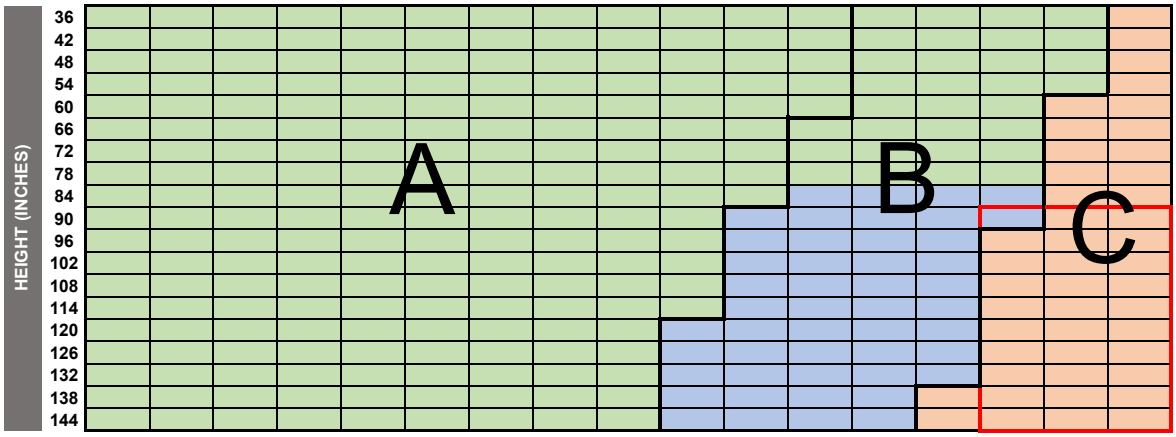


| Control Systems (Minimum height for all Control Systems is 12") | Minimum Width (Single Panel) | Minimum Height | Overall Minimum Width (2-on-1) | Specification Zone(s) |
|---|---|---|---|---|
| Continuous Cord Loop (Maximum height for 12" width is 60") | 12" | 12" | 24" | A, B & C |
| InMotion™ Wand | 21" | 12" | 43" | A & B |
| InMotion™ | 21 1/2" | 12" | 44" | A & B |


No-Drill Headrail available on InMotion™ with Medium Cassette only: Minimum Width for InMotion Wand is 22 1/2" and for InMotion Minimum Width is 22". Minimum height for both is 12". Not available at all Retailers.

| Collection Code | Collection Name | Max Width Non-Railroaded | Max Width Railroaded | Available with Seam |
|---|---|---|---|---|
| LB027 | Providence Blackout | 108" | N/A | No |

*Maximum width of continuous Deluxe Valance = Maximum published non-railroaded width less 8"
Maximum Width and Height for No-Drill Headrail is 84". Not available at all Retailers.

| Top Treatment | Legend | |
|---|---|---|
| Medium Cassette | | |
| Large Cassette | | |
| *Fabric Valance | | |
| Open Roll with Mounting Bar | | |

## Control System and Top Treatment Compatibility Chart - Perfect Placement™ Cordless

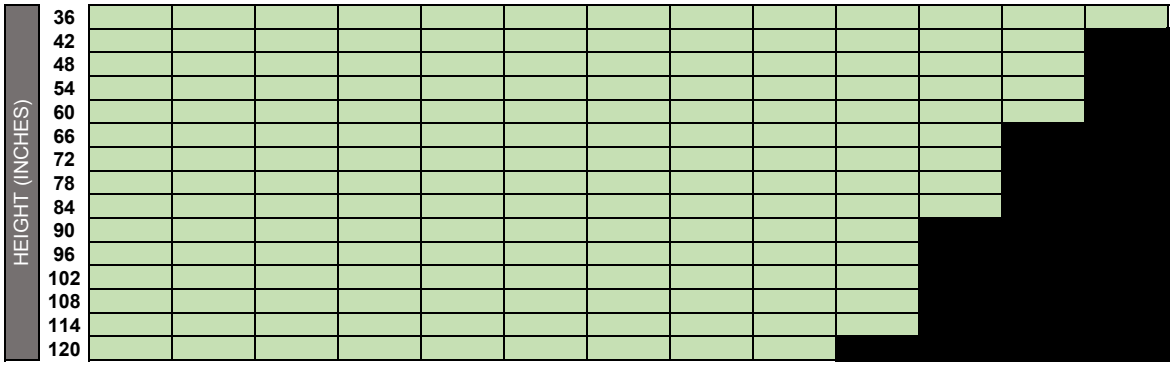


| Control Systems | Minimum Width (Single Panel) | Overall Minimum Width (2 on 1) | Minimum Height | Top Treatment |
|---|---|---|---|---|
| PerfectPlacement™ - Cordless | 18" | N/A | 24" | All |

No-Drill Headrail available on PerfectPlacement™ Cordless with Medium Cassette only: Minimum Width is 18 1/2". Minimum height is 24". Not available at all Retailers.


# PRODUCT SIZE SPECIFICATIONS

| Collection Code | Collection Name | Max Width Non-Railroaded | Max Width Railroaded | Available with Seam |
|---|---|---|---|---|
| LF039 | Ravello | 110" | 132" | Yes |

- Railroad Fabrics (turned width for length) will have a visible seam when fabricated longer than the maximum roll width less 16".
- **Red Box** in spec chart indicates shade sizes Heat Sealed Hem Bar for these sizes.
- Maximum width of continuous Fabric Valance = Maximum published non-railroaded width less 8"
- Maximum Width and Height for No-Drill Headrail is 84". Not available at all Retailers.

| Top Treatment | Legend | | |
|---|---|---|---|
| Medium Cassette | | | |
| Large Cassette | | | |
| Fabric Valance | | | |
| Open Roll | | | |

## Control System and Top Treatment Compatibility Chart - Continuous Cord Loop & InMotion™

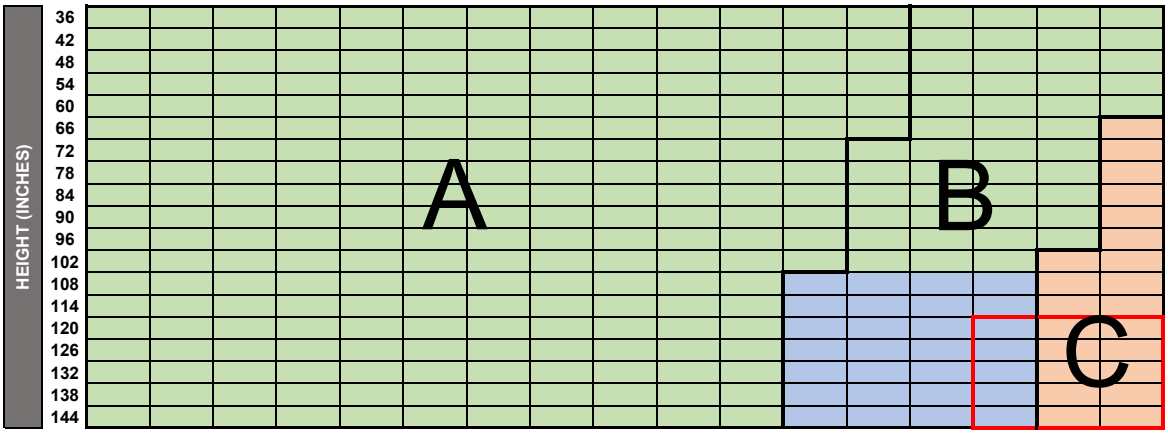


| Control Systems (Minimum height for all Control Systems is 12") | Minimum Width (Single Panel) | Minimum Height | Overall Minimum Width (2-on-1) | Specification Zone(s) |
|---|---|---|---|---|
| Continuous Cord Loop (Maximum height for 12" width is 60") | 12" | 12" | 24" | A, B & C |
| InMotion™ Wand | 21" | 12" | 43" | A & B |
| InMotion™ | 21 1/2" | 12" | 44" | A & B |


No-Drill Headrail available on InMotion™ with Medium Cassette only: Minimum Width for InMotion Wand is 22 1/2" and for InMotion Minimum Width is 22". Minimum height for both is 12". Not available at all Retailers.

| Collection Code | Collection Name | Max Width Non-Railroaded | Max Width Railroaded | Available with Seam |
|---|---|---|---|---|
| LF039 | Ravello | 108" | 108" | Yes |

*Maximum width of continuous Deluxe Valance = Maximum published non-railroaded width less 8"
Maximum Width and Height for No-Drill Headrail is 84". Not available at all Retailers.

| Top Treatment | Legend | |
|---|---|---|
| Medium Cassette | | |
| Large Cassette | | |
| *Fabric Valance | | |
| Open Roll with Mounting Bar | | |

## Control System and Top Treatment Compatibility Chart - Perfect Placement™ Cordless

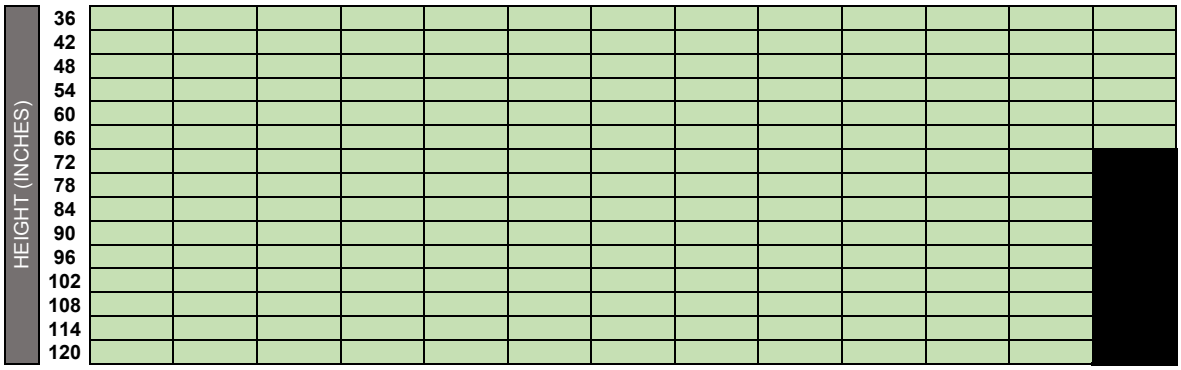


| Control Systems | Minimum Width (Single Panel) | Overall Minimum Width (2 on 1) | Minimum Height | Top Treatment |
|---|---|---|---|---|
| PerfectPlacement™ - Cordless | 18" | N/A | 24" | All |

No-Drill Headrail available on PerfectPlacement™ Cordless with Medium Cassette only: Minimum Width is 18 1/2". Minimum height is 24". Not available at all Retailers.


# PRODUCT SIZE SPECIFICATIONS

| Collection Code | Collection Name | Max Width Non-Railroaded | Max Width Railroaded | Available with Seam |
|---|---|---|---|---|
| LF047 | Revival | 105" | N/A | No |

- Railroad Fabrics (turned width for length) will have a visible seam when fabricated longer than the maximum roll width less 16".
- **Red Box** in spec chart indicates shade sizes Heat Sealed Hem Bar for these sizes.
- Maximum width of continuous Fabric Valance = Maximum published non-railroaded width less 8"
- Maximum Width and Height for No-Drill Headrail is 84". Not available at all Retailers.

| Top Treatment | Legend | | |
|---|---|---|---|
| Medium Cassette | | | |
| Large Cassette | | | |
| Fabric Valance | | | |
| Open Roll | | | |

## Control System and Top Treatment Compatibility Chart - Continuous Cord Loop & InMotion™

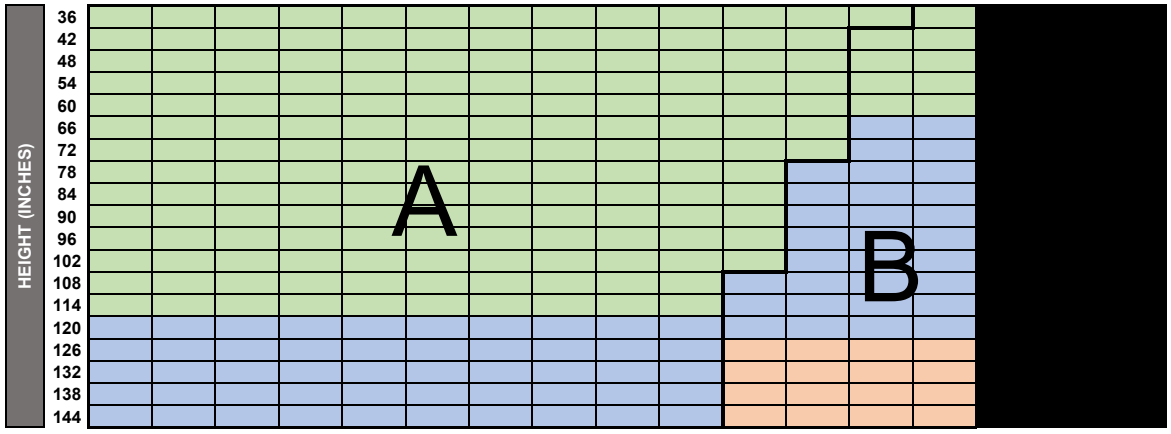


| Control Systems (Minimum height for all Control Systems is 12") | Minimum Width (Single Panel) | Minimum Height | Overall Minimum Width (2-on-1) | Specification Zone(s) |
|---|---|---|---|---|
| Continuous Cord Loop (Maximum height for 12" width is 60") | 12" | 12" | 24" | A, B & C |
| InMotion™ Wand | 21" | 12" | 43" | A & B |
| InMotion™ | 21 1/2" | 12" | 44" | A & B |


No-Drill Headrail available on InMotion™ with Medium Cassette only: Minimum Width for InMotion Wand is 22 1/2" and for InMotion Minimum Width is 22". Minimum height for both is 12". Not available at all Retailers.

| Collection Code | Collection Name | Max Width Non-Railroaded | Max Width Railroaded | Available with Seam |
|---|---|---|---|---|
| LF047 | Revival | 108" | N/A | No |

*Maximum width of continuous Deluxe Valance = Maximum published non-railroaded width less 8"
Maximum Width and Height for No-Drill Headrail is 84". Not available at all Retailers.

| Top Treatment | Legend | |
|---|---|---|
| Medium Cassette | | |
| Large Cassette | | |
| *Fabric Valance | | |
| Open Roll with Mounting Bar | | |

## Control System and Top Treatment Compatibility Chart - Perfect Placement™ Cordless

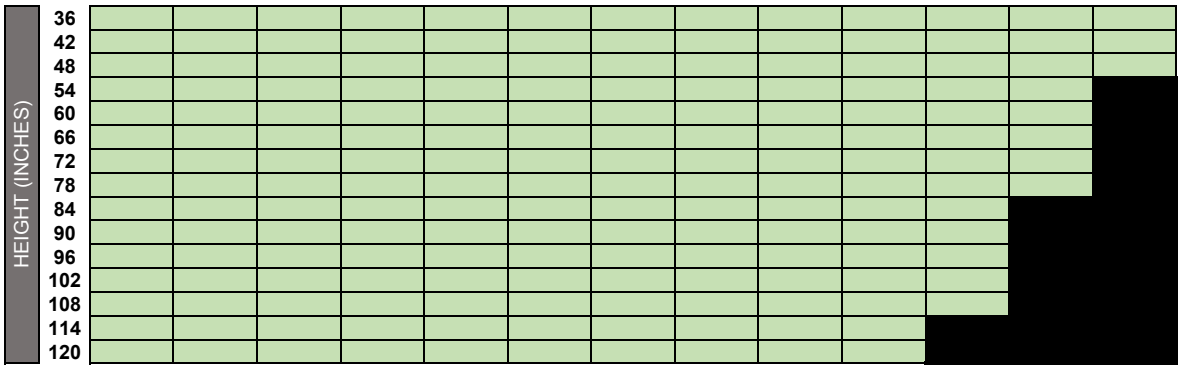


| Control Systems | Minimum Width (Single Panel) | Overall Minimum Width (2 on 1) | Minimum Height | Top Treatment |
|---|---|---|---|---|
| PerfectPlacement™ - Cordless | 18" | N/A | 24" | All |

No-Drill Headrail available on PerfectPlacement™ Cordless with Medium Cassette only: Minimum Width is 18 1/2". Minimum height is 24". Not available at all Retailers.


# PRODUCT SIZE SPECIFICATIONS

| Collection Code | Collection Name | Max Width Non-Railroaded | Max Width Railroaded | Available with Seam |
|---|---|---|---|---|
| LB047 | Revival Blackout | 105" | N/A | No |

- Railroad Fabrics (turned width for length) will have a visible seam when fabricated longer than the maximum roll width less 16".
- **Red Box** in spec chart indicates shade sizes Heat Sealed Hem Bar for these sizes.
- Maximum width of continuous Fabric Valance = Maximum published non-railroaded width less 8"
- Maximum Width and Height for No-Drill Headrail is 84". Not available at all Retailers.

| Top Treatment | Legend | | |
|---|---|---|---|
| Medium Cassette | | | |
| Large Cassette | | | |
| Fabric Valance | | | |
| Open Roll | | | |

## Control System and Top Treatment Compatibility Chart - Continuous Cord Loop & InMotion™

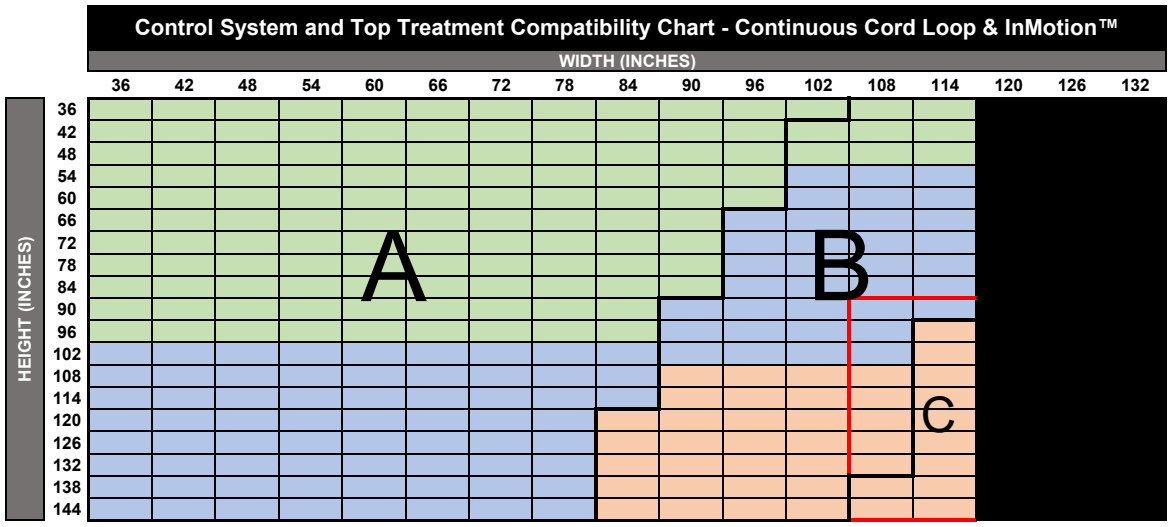


| Control Systems (Minimum height for all Control Systems is 12") | Minimum Width (Single Panel) | Minimum Height | Overall Minimum Width (2-on-1) | Specification Zone(s) |
|---|---|---|---|---|
| Continuous Cord Loop (Maximum height for 12" width is 60") | 12" | 12" | 24" | A, B & C |
| InMotion™ Wand | 21" | 12" | 43" | A & B |
| InMotion™ | 21 1/2" | 12" | 44" | A & B |


No-Drill Headrail available on InMotion™ with Medium Cassette only: Minimum Width for InMotion Wand is 22 1/2" and for InMotion Minimum Width is 22". Minimum height for both is 12". Not available at all Retailers.

| Collection Code | Collection Name | Max Width Non-Railroaded | Max Width Railroaded | Available with Seam |
|---|---|---|---|---|
| LB047 | Revival Blackout | 102" | N/A | No |

*Maximum width of continuous Deluxe Valance = Maximum published non-railroaded width less 8"
Maximum Width and Height for No-Drill Headrail is 84". Not available at all Retailers.

| Top Treatment | Legend | |
|---|---|---|
| Medium Cassette | | |
| Large Cassette | | |
| *Fabric Valance | | |
| Open Roll with Mounting Bar | | |

## Control System and Top Treatment Compatibility Chart - Perfect Placement™ Cordless

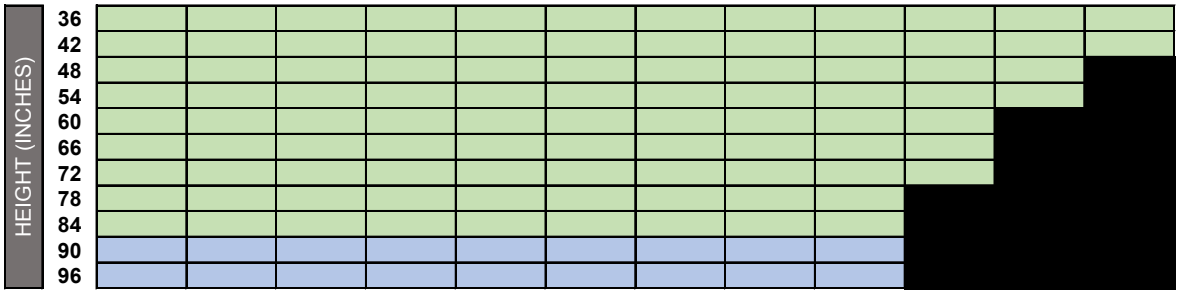


| Control Systems | Minimum Width (Single Panel) | Overall Minimum Width (2 on 1) | Minimum Height | Top Treatment |
|---|---|---|---|---|
| PerfectPlacement™ - Cordless | 18" | N/A | 24" | All |

No-Drill Headrail available on PerfectPlacement™ Cordless with Medium Cassette only: Minimum Width is 18 1/2". Minimum height is 24". Not available at all Retailers.


# PRODUCT SIZE SPECIFICATIONS

| Collection Code | Collection Name | Max Width Non-Railroaded | Max Width Railroaded | Available with Seam |
|---|---|---|---|---|
| LF028 | Shangrila | 113" | N/A | No |

- Railroad Fabrics (turned width for length) will have a visible seam when fabricated longer than the maximum roll width less 16".
- **Red Box** in spec chart indicates shade sizes Heat Sealed Hem Bar for these sizes.
- Maximum width of continuous Fabric Valance = Maximum published non-railroaded width less 8"
- Maximum Width and Height for No-Drill Headrail is 84". Not available at all Retailers.

| Top Treatment | Legend | | |
|---|---|---|---|
| Medium Cassette | | | |
| Large Cassette | | | |
| Fabric Valance | | | |
| Open Roll | | | |

## Control System and Top Treatment Compatibility Chart - Continuous Cord Loop & InMotion™

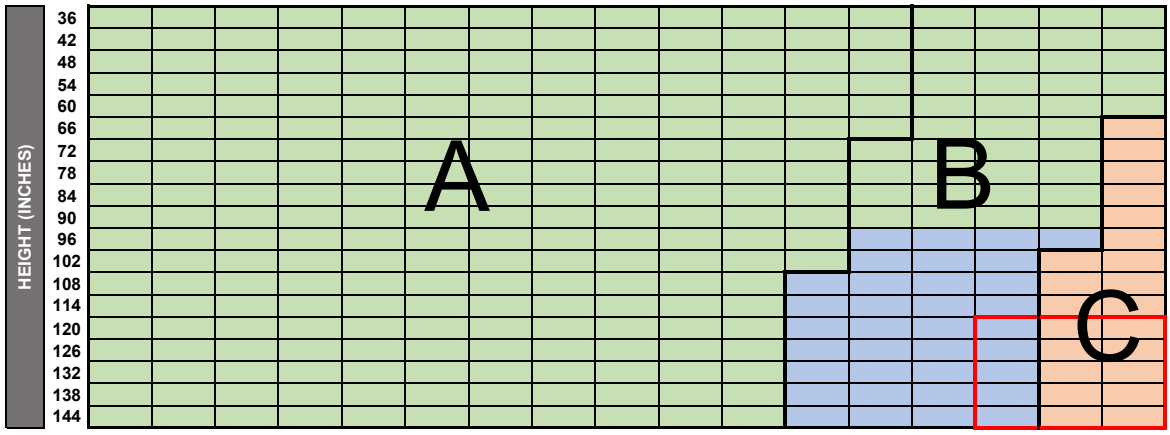


| Control Systems (Minimum height for all Control Systems is 12") | Minimum Width (Single Panel) | Minimum Height | Overall Minimum Width (2-on-1) | Specification Zone(s) |
|---|---|---|---|---|
| Continuous Cord Loop (Maximum height for 12" width is 60") | 12" | 12" | 24" | A, B & C |
| InMotion™ Wand | 21" | 12" | 43" | A & B |
| InMotion™ | 21 1/2" | 12" | 44" | A & B |


No-Drill Headrail available on InMotion™ with Medium Cassette only: Minimum Width for InMotion Wand is 22 1/2" and for InMotion Minimum Width is 22". Minimum height for both is 12". Not available at all Retailers.

| Collection Code | Collection Name | Max Width Non-Railroaded | Max Width Railroaded | Available with Seam |
|---|---|---|---|---|
| LF028 | Shangrila | 108" | N/A | No |

*Maximum width of continuous Deluxe Valance = Maximum published non-railroaded width less 8"
Maximum Width and Height for No-Drill Headrail is 84". Not available at all Retailers.

| Top Treatment | Legend | |
|---|---|---|
| Medium Cassette | | |
| Large Cassette | | |
| *Fabric Valance | | |
| Open Roll with Mounting Bar | | |

## Control System and Top Treatment Compatibility Chart - Perfect Placement™ Cordless

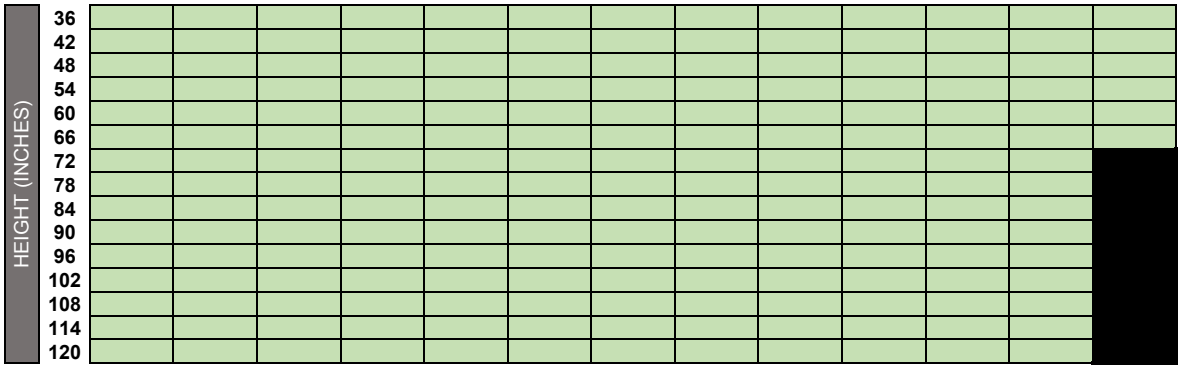


| Control Systems | Minimum Width (Single Panel) | Overall Minimum Width (2 on 1) | Minimum Height | Top Treatment |
|---|---|---|---|---|
| PerfectPlacement™ - Cordless | 18" | N/A | 24" | All |

No-Drill Headrail available on PerfectPlacement™ Cordless with Medium Cassette only: Minimum Width is 18 1/2". Minimum height is 24". Not available at all Retailers.


# PRODUCT SIZE SPECIFICATIONS

| Collection Code | Collection Name | Max Width Non-Railroaded | Max Width Railroaded | Available with Seam |
|---|---|---|---|---|
| LB028 | Shangrila Blackout | 113" | N/A | No |

- Railroad Fabrics (turned width for length) will have a visible seam when fabricated longer than the maximum roll width less 16".
- **Red Box** in spec chart indicates shade sizes Heat Sealed Hem Bar for these sizes.
- Maximum width of continuous Fabric Valance = Maximum published non-railroaded width less 8"
- Maximum Width and Height for No-Drill Headrail is 84". Not available at all Retailers.

| Top Treatment | Legend | | |
|---|---|---|---|
| Medium Cassette | | | |
| Large Cassette | | | |
| Fabric Valance | | | |
| Open Roll | | | |

## Control System and Top Treatment Compatibility Chart - Continuous Cord Loop & InMotion™

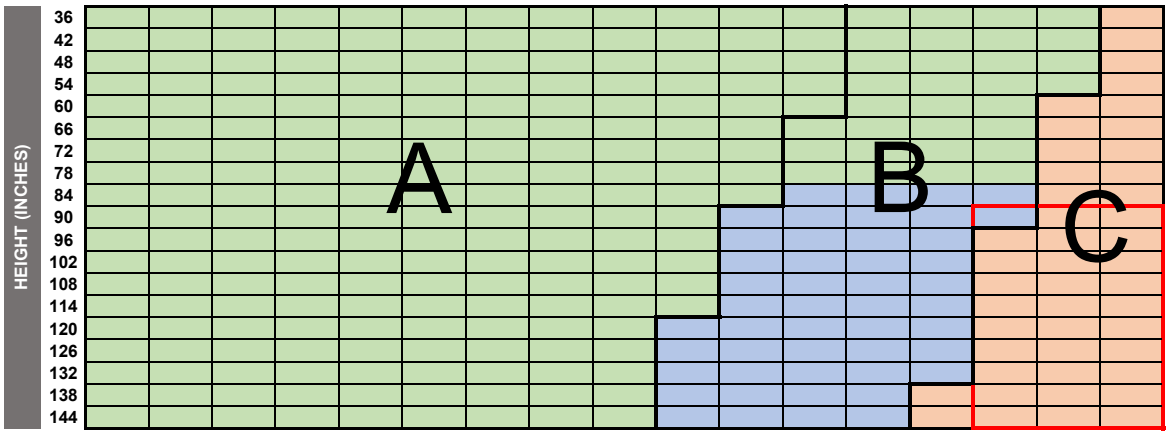


| Control Systems (Minimum height for all Control Systems is 12") | Minimum Width (Single Panel) | Minimum Height | Overall Minimium Width (2-on-1) | Specification Zone(s) |
|---|---|---|---|---|
| Continuous Cord Loop (Maximum height for 12" width is 60") | 12" | 12" | 24" | A, B & C |
| InMotion™ Wand | 21" | 12" | 43" | A & B |
| InMotion™ | 21 1/2" | 12" | 44" | A & B |


No-Drill Headrail available on InMotion™ with Medium Cassette only: Minimum Width for InMotion Wand is 22 1/2" and for InMotion Minimum Width is 22". Minimum height for both is 12". Not available at all Retailers.

| Collection Code | Collection Name | Max Width Non-Railroaded | Max Width Railroaded | Available with Seam |
|---|---|---|---|---|
| LB028 | Shangrila Blackout | 108" | N/A | No |

*Maximum width of continuous Deluxe Valance = Maximum published non-railroaded width less 8"
Maximum Width and Height for No-Drill Headrail is 84". Not available at all Retailers.

| Top Treatment | Legend | |
|---|---|---|
| Medium Cassette | | |
| Large Cassette | | |
| *Fabric Valance | | |
| Open Roll with Mounting Bar | | |

## Control System and Top Treatment Compatibility Chart - Perfect Placement™ Cordless

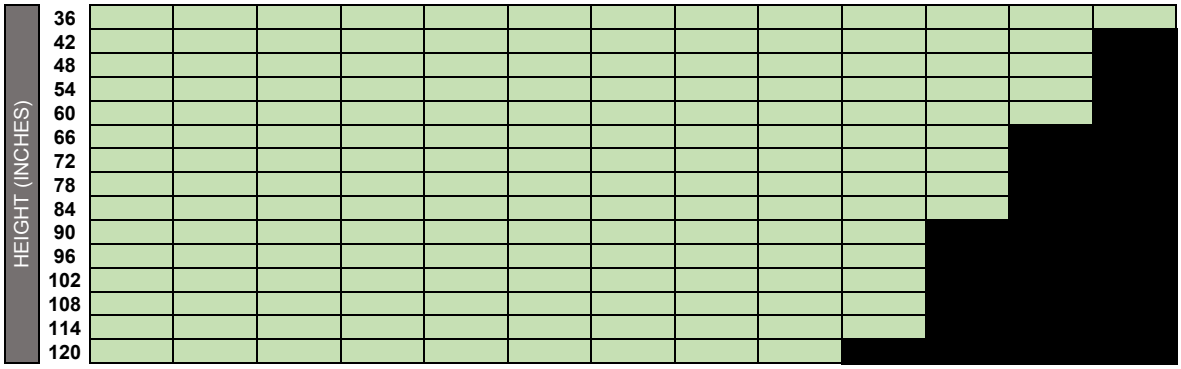


| Control Systems | Minimum Width (Single Panel) | Overall Minimum Width (2 on 1) | Minimum Height | Top Treatment |
|---|---|---|---|---|
| PerfectPlacement™ - Cordless | 18" | N/A | 24" | All |

No-Drill Headrail available on PerfectPlacement™ Cordless with Medium Cassette only: Minimum Width is 18 1/2". Minimum height is 24". Not available at all Retailers.


# PRODUCT SIZE SPECIFICATIONS

| Collection Code | Collection Name | Max Width Non-Railroaded | Max Width Railroaded | Available with Seam |
|---|---|---|---|---|
| LF045 | Stonewash | 105" | N/A | No |

- Railroad Fabrics (turned width for length) will have a visible seam when fabricated longer than the maximum roll width less 16".
- **Red Box** in spec chart indicates shade sizes Heat Sealed Hem Bar for these sizes.
- Maximum width of continuous Fabric Valance = Maximum published non-railroaded width less 8"
- Maximum Width and Height for No-Drill Headrail is 84". Not available at all Retailers.

| Top Treatment | Legend | | |
|---|---|---|---|
| Medium Cassette | | | |
| Large Cassette | | | |
| Fabric Valance | | | |
| Open Roll | | | |

## Control System and Top Treatment Compatibility Chart - Continuous Cord Loop & InMotion™

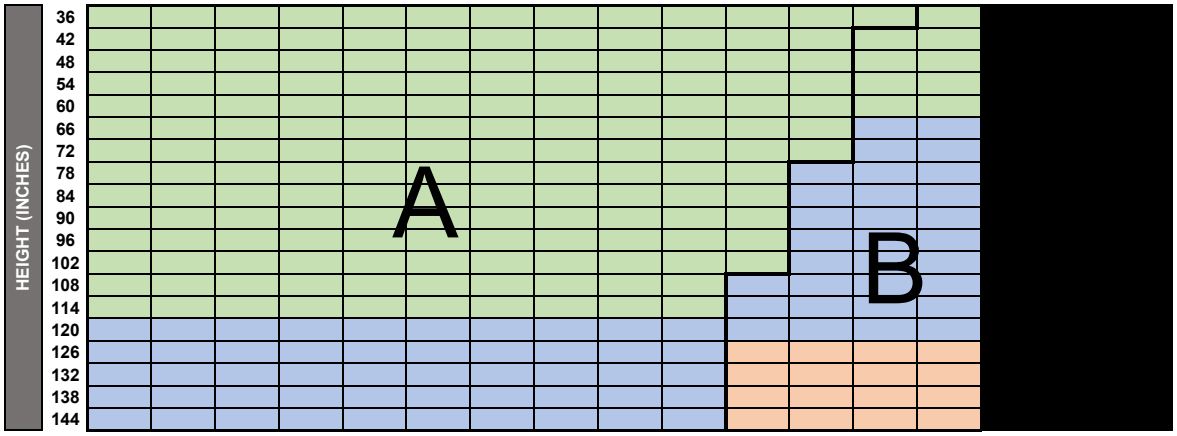


| Control Systems (Minimum height for all Control Systems is 12") | Minimium Width (Single Panel) | Minimum Height | Overall Minimium Width (2-on-1) | Specification Zone(s) |
|---|---|---|---|---|
| Continuous Cord Loop (Maximum height for 12" width is 60") | 12" | 12" | 24" | A, B & C |
| InMotion™ Wand | 21" | 12" | 43" | A & B |
| InMotion™ | 21 1/2" | 12" | 44" | A & B |


No-Drill Headrail available on InMotion™ with Medium Cassette only: Minimum Width for InMotion Wand is 22 1/2" and for InMotion Minimum Width is 22". Minimum height for both is 12". Not available at all Retailers.

| Collection Code | Collection Name | Max Width Non-Railroaded | Max Width Railroaded | Available with Seam |
|---|---|---|---|---|
| LF045 | Stonewash | 105" | N/A | No |

*Maximum width of continuous Deluxe Valance = Maximum published non-railroaded width less 8"
Maximum Width and Height for No-Drill Headrail is 84". Not available at all Retailers.

| Top Treatment | Legend | |
|---|---|---|
| Medium Cassette | | |
| Large Cassette | | |
| *Fabric Valance | | |
| Open Roll with Mounting Bar | | |

## Control System and Top Treatment Compatibility Chart - Perfect Placement™ Cordless

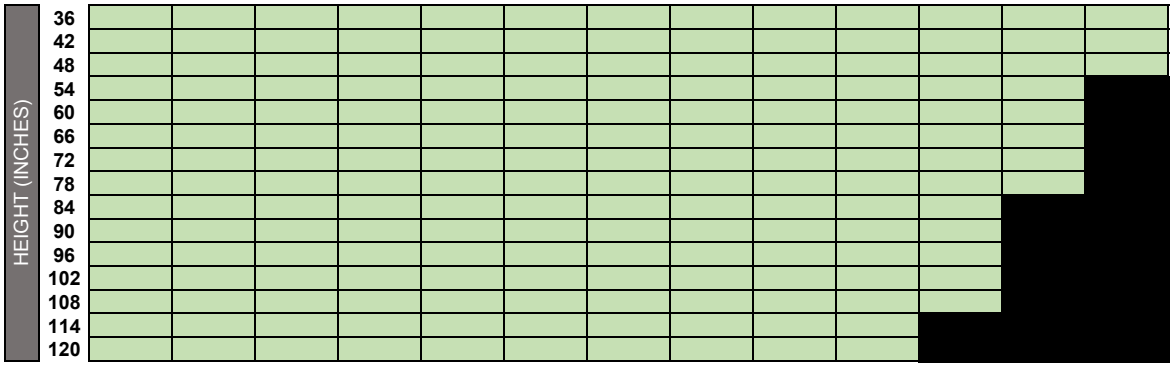


| Control Systems | Minimum Width (Single Panel) | Overall Minimum Width (2 on 1) | Minimum Height | Top Treatment |
|---|---|---|---|---|
| PerfectPlacement™ - Cordless | 18" | N/A | 24" | All |

No-Drill Headrail available on PerfectPlacement™ Cordless with Medium Cassette only: Minimum Width is 18 1/2". Minimum height is 24". Not available at all Retailers.


# PRODUCT SIZE SPECIFICATIONS

| Collection Code | Collection Name | Max Width Non-Railroaded | Max Width Railroaded | Available with Seam |
|---|---|---|---|---|
| LB045 | Stonewash Blackout | 105" | N/A | No |

- Railroad Fabrics (turned width for length) will have a visible seam when fabricated longer than the maximum roll width less 16".
- **Red Box** in spec chart indicates shade sizes Heat Sealed Hem Bar for these sizes.
- Maximum width of continuous Fabric Valance = Maximum published non-railroaded width less 8"
- Maximum Width and Height for No-Drill Headrail is 84". Not available at all Retailers.

| Top Treatment | Legend | | |
|---|---|---|---|
| Medium Cassette | | | |
| Large Cassette | | | |
| Fabric Valance | | | |
| Open Roll | | | |

## Control System and Top Treatment Compatibility Chart - Continuous Cord Loop & InMotion™

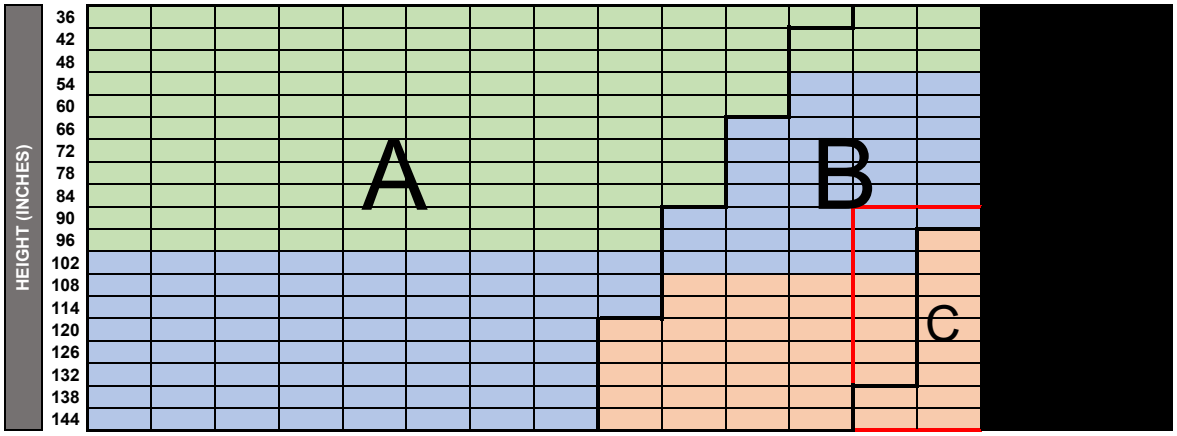


| Control Systems (Minimum height for all Control Systems is 12") | Minimium Width (Single Panel) | Minimum Height | Overall Minimium Width (2-on-1) | Specification Zone(s) |
|---|---|---|---|---|
| Continuous Cord Loop (Maximum height for 12" width is 60") | 12" | 12" | 24" | A, B & C |
| InMotion™ Wand | 21" | 12" | 43" | A & B |
| InMotion™ | 21 1/2" | 12" | 44" | A & B |


No-Drill Headrail available on InMotion™ with Medium Cassette only: Minimum Width for InMotion Wand is 22 1/2" and for InMotion Minimum Width is 22". Minimum height for both is 12". Not available at all Retailers.

| Collection Code | Collection Name | Max Width Non-Railroaded | Max Width Railroaded | Available with Seam |
|---|---|---|---|---|
| LB045 | Stonewash Blackout | 102" | N/A | No |

*Maximum width of continuous Deluxe Valance = Maximum published non-railroaded width less 8"
Maximum Width and Height for No-Drill Headrail is 84". Not available at all Retailers.

| Top Treatment | Legend | |
|---|---|---|
| Medium Cassette | | |
| Large Cassette | | |
| *Fabric Valance | | |
| Open Roll with Mounting Bar | | |

## Control System and Top Treatment Compatibility Chart - Perfect Placement™ Cordless

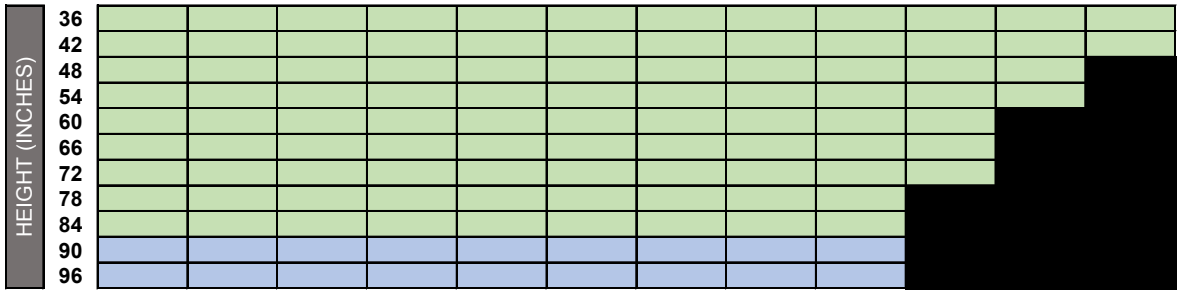


| Control Systems | Minimum Width (Single Panel) | Overall Minimum Width (2 on 1) | Minimum Height | Top Treatment |
|---|---|---|---|---|
| PerfectPlacement™ - Cordless | 18" | N/A | 24" | All |

No-Drill Headrail available on PerfectPlacement™ Cordless with Medium Cassette only: Minimum Width is 18 1/2". Minimum height is 24". Not available at all Retailers.


# PRODUCT SIZE SPECIFICATIONS

| Collection Code | Collection Name | Max Width Non-Railroaded | Max Width Railroaded | Available with Seam |
|---|---|---|---|---|
| LF048 | Toulouse | 110" | N/A | No |

- Railroad Fabrics (turned width for length) will have a visible seam when fabricated longer than the maximum roll width less 16".
- **Red Box** in spec chart indicates shade sizes Heat Sealed Hem Bar for these sizes.
- Maximum width of continuous Fabric Valance = Maximum published non-railroaded width less 8"
- Maximum Width and Height for No-Drill Headrail is 84". Not available at all Retailers.

| Top Treatment | Legend | | |
|---|---|---|---|
| Medium Cassette | | | |
| Large Cassette | | | |
| Fabric Valance | | | |
| Open Roll | | | |

## Control System and Top Treatment Compatibility Chart - Continuous Cord Loop & InMotion™

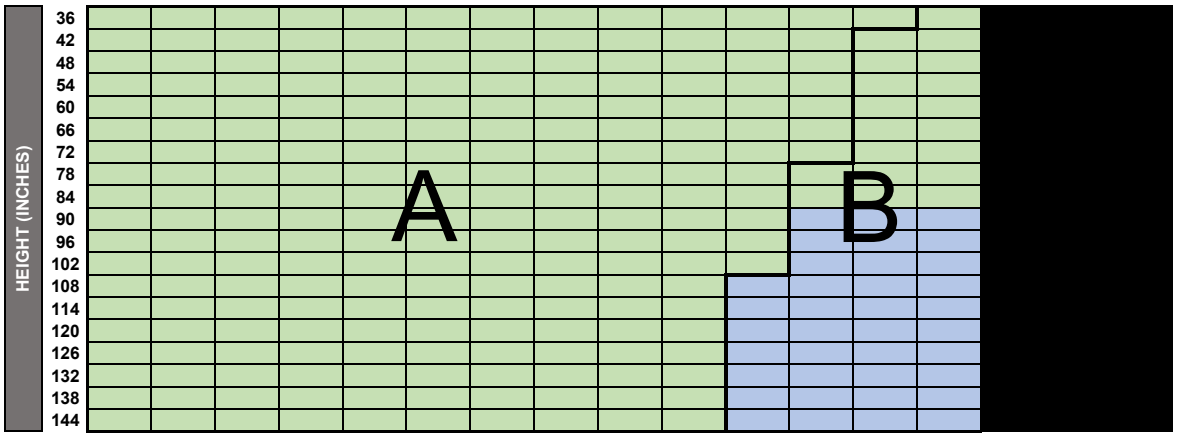


| Control Systems (Minimum height for all Control Systems is 12") | Minimium Width (Single Panel) | Minimum Height | Overall Minimium Width (2-on-1) | Specification Zone(s) |
|---|---|---|---|---|
| Continuous Cord Loop (Maximum height for 12" width is 60") | 12" | 12" | 24" | A, B & C |
| InMotion™ Wand | 21" | 12" | 43" | A & B |
| InMotion™ | 21 1/2" | 12" | 44" | A & B |


No-Drill Headrail available on InMotion™ with Medium Cassette only: Minimum Width for InMotion Wand is 22 1/2" and for InMotion Minimum Width is 22". Minimum height for both is 12". Not available at all Retailers.

| Collection Code | Collection Name | Max Width Non-Railroaded | Max Width Railroaded | Available with Seam |
|---|---|---|---|---|
| LF048 | Toulouse | 108" | N/A | No |

*Maximum width of continuous Deluxe Valance = Maximum published non-railroaded width less 8"
Maximum Width and Height for No-Drill Headrail is 84". Not available at all Retailers.

| Top Treatment | Legend | |
|---|---|---|
| Medium Cassette | | |
| Large Cassette | | |
| *Fabric Valance | | |
| Open Roll with Mounting Bar | | |

## Control System and Top Treatment Compatibility Chart - Perfect Placement™ Cordless

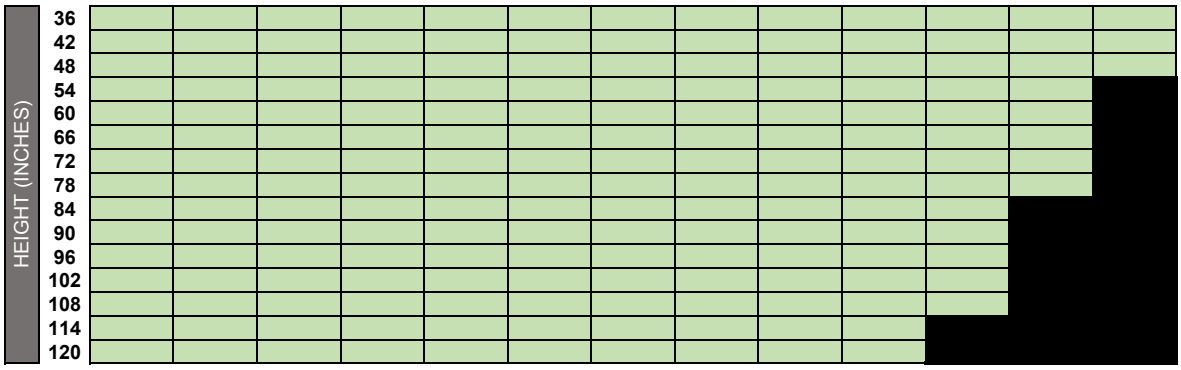


| Control Systems | Minimum Width (Single Panel) | Overall Minimum Width (2 on 1) | Minimum Height | Top Treatment |
|---|---|---|---|---|
| PerfectPlacement™ - Cordless | 18" | N/A | 24" | All |

No-Drill Headrail available on PerfectPlacement™ Cordless with Medium Cassette only: Minimum Width is 18 1/2". Minimum height is 24". Not available at all Retailers.


# PRODUCT SIZE SPECIFICATIONS

| Collection Code | Collection Name | Max Width Non-Railroaded | Max Width Railroaded | Available with Seam |
|---|---|---|---|---|
| LB048 | Toulouse Blackout | 110" | N/A | No |

- Railroad Fabrics (turned width for length) will have a visible seam when fabricated longer than the maximum roll width less 16".
- **Red Box** in spec chart indicates shade sizes Heat Sealed Hem Bar for these sizes.
- Maximum width of continuous Fabric Valance = Maximum published non-railroaded width less 8"
- Maximum Width and Height for No-Drill Headrail is 84". Not available at all Retailers.

| Top Treatment | Legend | | |
|---|---|---|---|
| Medium Cassette | | | |
| Large Cassette | | | |
| Fabric Valance | | | |
| Open Roll | | | |

## Control System and Top Treatment Compatibility Chart - Continuous Cord Loop & InMotion™

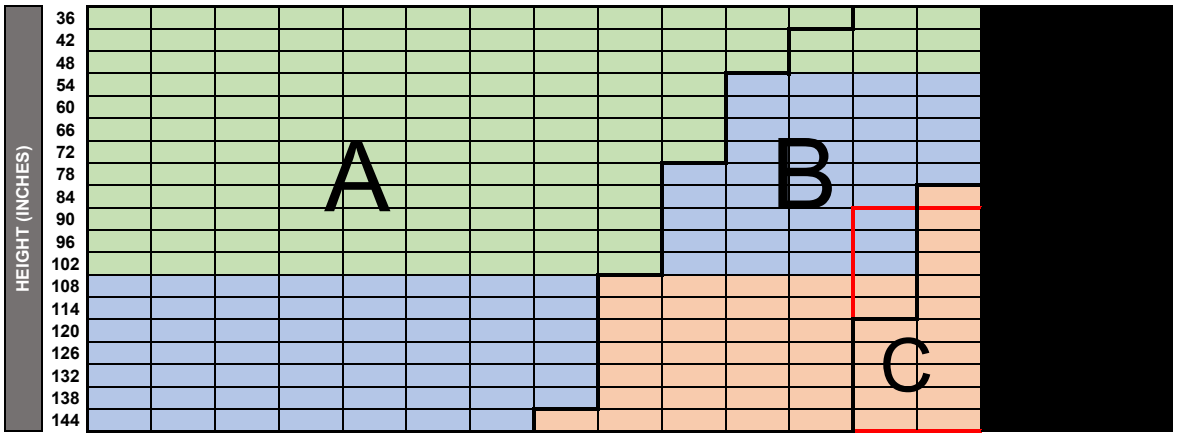


| Control Systems (Minimum height for all Control Systems is 12") | Minimum Width (Single Panel) | Minimum Height | Overall Minimum Width (2-on-1) | Specification Zone(s) |
|---|---|---|---|---|
| Continuous Cord Loop (Maximum height for 12" width is 60") | 12" | 12" | 24" | A, B & C |
| InMotion™ Wand | 21" | 12" | 43" | A & B |
| InMotion™ | 21 1/2" | 12" | 44" | A & B |


No-Drill Headrail available on InMotion™ with Medium Cassette only: Minimum Width for InMotion Wand is 22 1/2" and for InMotion Minimum Width is 22". Minimum height for both is 12". Not available at all Retailers.

| Collection Code | Collection Name | Max Width Non-Railroaded | Max Width Railroaded | Available with Seam |
|---|---|---|---|---|
| LB048 | Toulouse Blackout | 102" | N/A | No |

*Maximum width of continuous Deluxe Valance = Maximum published non-railroaded width less 8"
Maximum Width and Height for No-Drill Headrail is 84". Not available at all Retailers.

| Top Treatment | Legend | |
|---|---|---|
| Medium Cassette | | |
| Large Cassette | | |
| *Fabric Valance | | |
| Open Roll with Mounting Bar | | |

## Control System and Top Treatment Compatibility Chart - Perfect Placement™ Cordless

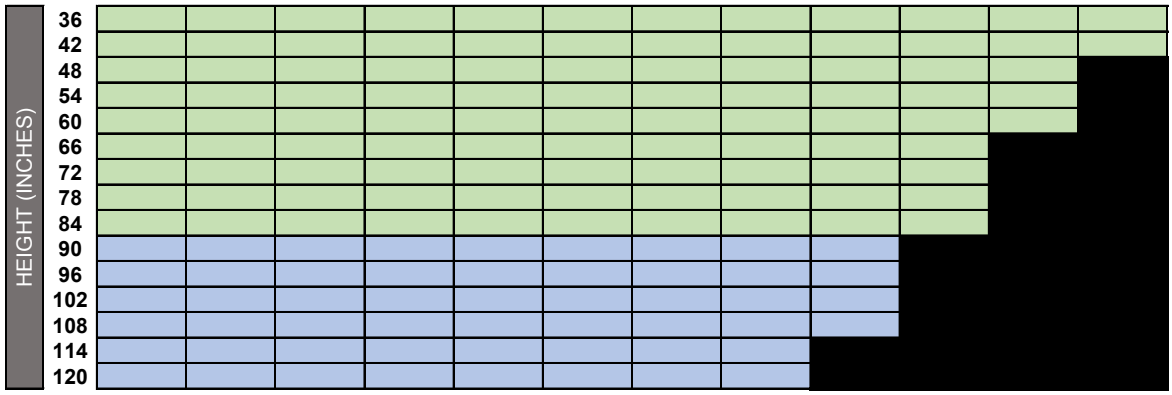


| Control Systems | Minimum Width (Single Panel) | Overall Minimum Width (2 on 1) | Minimum Height | Top Treatment |
|---|---|---|---|---|
| PerfectPlacement™ - Cordless | 18" | N/A | 24" | All |

No-Drill Headrail available on PerfectPlacement™ Cordless with Medium Cassette only: Minimum Width is 18 1/2". Minimum height is 24". Not available at all Retailers.


# PRODUCT SIZE SPECIFICATIONS

| Collection Code | Collection Name | Max Width Non-Railroaded | Max Width Railroaded | Available with Seam |
|---|---|---|---|---|
| LF053 | Valentina | 122" | 132" | Yes |

- Railroad Fabrics (turned width for length) will have a visible seam when fabricated longer than the maximum roll width less 16".
- **Red Box** in spec chart indicates shade sizes Heat Sealed Hem Bar for these sizes.
- Maximum width of continuous Fabric Valance = Maximum published non-railroaded width less 8"
- Maximum Width and Height for No-Drill Headrail is 84". Not available at all Retailers.

| Top Treatment | Legend | | |
|---|---|---|---|
| Medium Cassette | | | |
| Large Cassette | | | |
| Fabric Valance | | | |
| Open Roll | | | |

## Control System and Top Treatment Compatibility Chart - Continuous Cord Loop & InMotion™

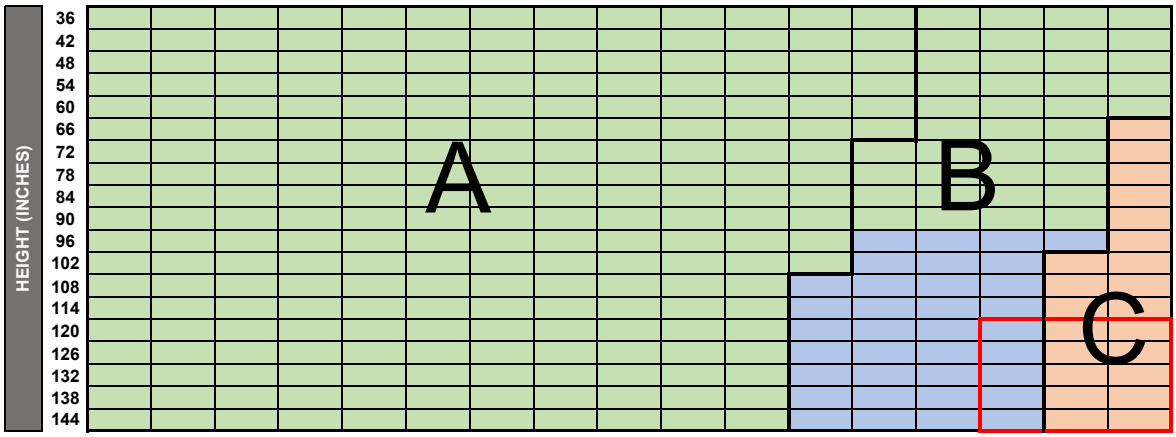


| Control Systems (Minimum height for all Control Systems is 12") | Minimum Width (Single Panel) | Minimum Height | Overall Minimum Width (2-on-1) | Specification Zone(s) |
|---|---|---|---|---|
| Continuous Cord Loop (Maximum height for 12" width is 60") | 12" | 12" | 24" | A, B & C |
| InMotion™ Wand | 21" | 12" | 43" | A & B |
| InMotion™ | 21 1/2" | 12" | 44" | A & B |


No-Drill Headrail available on InMotion™ with Medium Cassette only: Minimum Width for InMotion Wand is 22 1/2" and for InMotion Minimum Width is 22". Minimum height for both is 12". Not available at all Retailers.

| Collection Code | Collection Name | Max Width Non-Railroaded | Max Width Railroaded | Available with Seam |
|---|---|---|---|---|
| LF053 | Valentina | 108" | 108" | Yes |

*Maximum width of continuous Deluxe Valance = Maximum published non-railroaded width less 8"
Maximum Width and Height for No-Drill Headrail is 84". Not available at all Retailers.

| Top Treatment | Legend | |
|---|---|---|
| Medium Cassette | | |
| Large Cassette | | |
| *Fabric Valance | | |
| Open Roll with Mounting Bar | | |

## Control System and Top Treatment Compatibility Chart - Perfect Placement™ Cordless

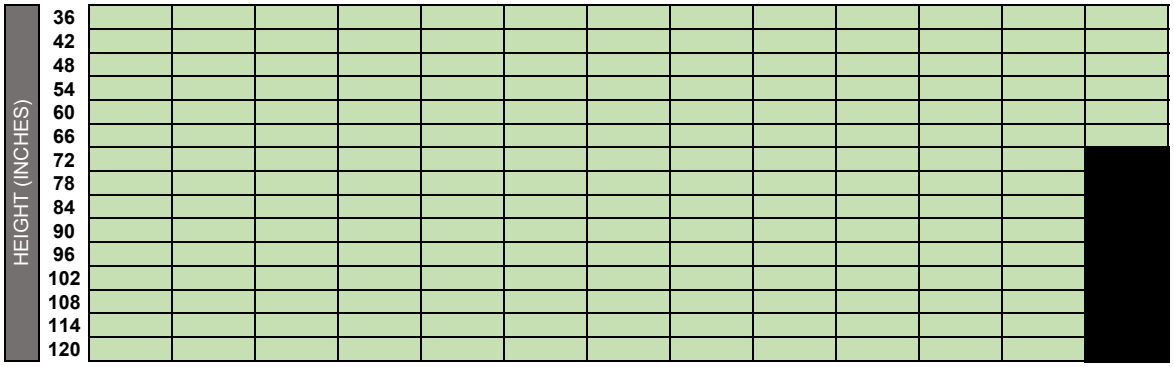


| Control Systems | Minimum Width (Single Panel) | Overall Minimum Width (2 on 1) | Minimum Height | Top Treatment |
|---|---|---|---|---|
| PerfectPlacement™ - Cordless | 18" | N/A | 24" | All |

No-Drill Headrail available on PerfectPlacement™ Cordless with Medium Cassette only: Minimum Width is 18 1/2". Minimum height is 24". Not available at all Retailers.


# PRODUCT SIZE SPECIFICATIONS

| Collection Code | Collection Name | Max Width Non-Railroaded | Max Width Railroaded | Available with Seam |
|---|---|---|---|---|
| LB053 | Valentina Blackout | 120" | 132" | Yes |

- Railroad Fabrics (turned width for length) will have a visible seam when fabricated longer than the maximum roll width less 16".
- **Red Box** in spec chart indicates shade sizes Heat Sealed Hem Bar for these sizes.
- Maximum width of continuous Fabric Valance = Maximum published non-railroaded width less 8"
- Maximum Width and Height for No-Drill Headrail is 84". Not available at all Retailers.

| Top Treatment | Legend | | |
|---|---|---|---|
| Medium Cassette | | | |
| Large Cassette | | | |
| Fabric Valance | | | |
| Open Roll | | | |

## Control System and Top Treatment Compatibility Chart - Continuous Cord Loop & InMotion™

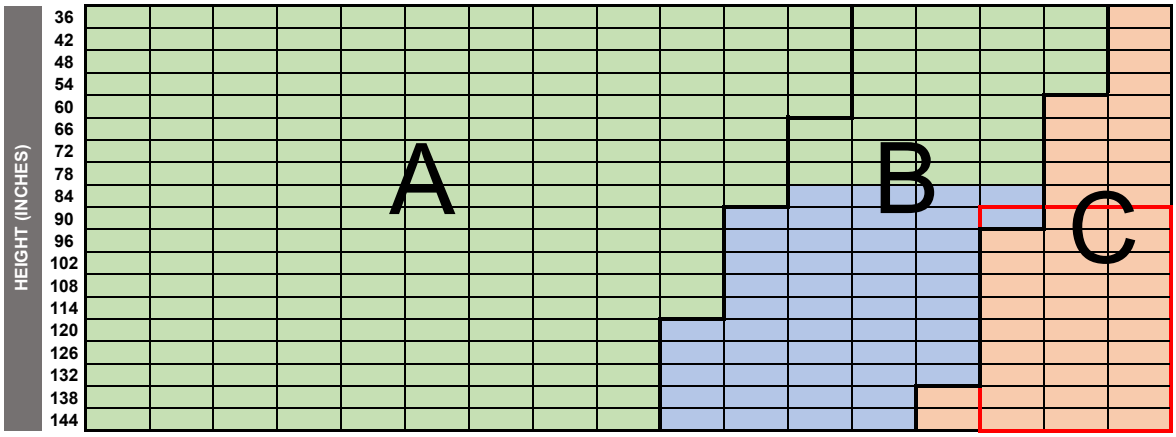


| Control Systems (Minimum height for all Control Systems is 12") | Minimum Width (Single Panel) | Minimum Height | Overall Minimum Width (2-on-1) | Specification Zone(s) |
|---|---|---|---|---|
| Continuous Cord Loop (Maximum height for 12" width is 60") | 12" | 12" | 24" | A, B & C |
| InMotion™ Wand | 21" | 12" | 43" | A & B |
| InMotion™ | 21 1/2" | 12" | 44" | A & B |


No-Drill Headrail available on InMotion™ with Medium Cassette only: Minimum Width for InMotion Wand is 22 1/2" and for InMotion Minimum Width is 22". Minimum height for both is 12". Not available at all Retailers.

| Collection Code | Collection Name | Max Width Non-Railroaded | Max Width Railroaded | Available with Seam |
|---|---|---|---|---|
| LB053 | Valentina Blackout | 108" | 108" | Yes |

*Maximum width of continuous Deluxe Valance = Maximum published non-railroaded width less 8"
Maximum Width and Height for No-Drill Headrail is 84". Not available at all Retailers.

| Top Treatment | Legend | |
|---|---|---|
| Medium Cassette | | |
| Large Cassette | | |
| *Fabric Valance | | |
| Open Roll with Mounting Bar | | |

## Control System and Top Treatment Compatibility Chart - Perfect Placement™ Cordless

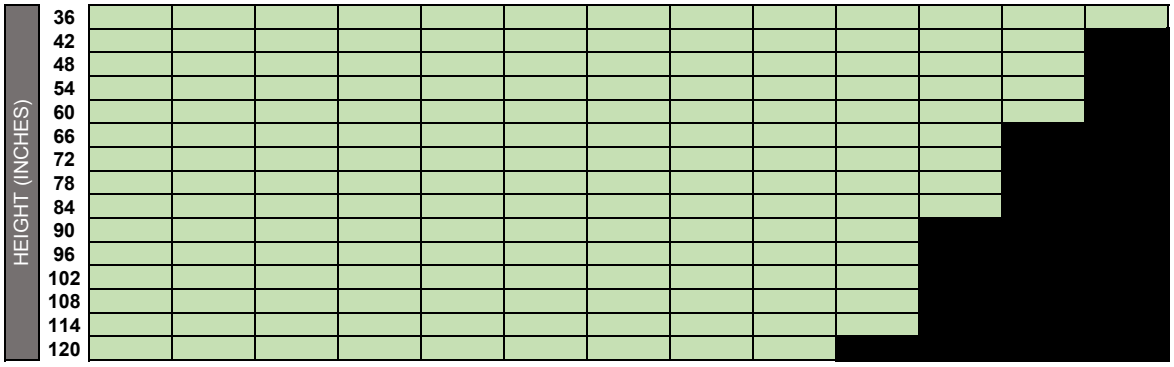


| Control Systems | Minimum Width (Single Panel) | Overall Minimum Width (2 on 1) | Minimum Height | Top Treatment |
|---|---|---|---|---|
| PerfectPlacement™ - Cordless | 18" | N/A | 24" | All |

No-Drill Headrail available on PerfectPlacement™ Cordless with Medium Cassette only: Minimum Width is 18 1/2". Minimum height is 24". Not available at all Retailers.


# PRODUCT SIZE SPECIFICATIONS

| Collection Code | Collection Name | Max Width Non-Railroaded | Max Width Railroaded | Available with Seam |
|---|---|---|---|---|
| LF040 | Valhalla | 110" | N/A | No |

- Railroad Fabrics (turned width for length) will have a visible seam when fabricated longer than the maximum roll width less 16".
- **Red Box** in spec chart indicates shade sizes Heat Sealed Hem Bar for these sizes.
- Maximum width of continuous Fabric Valance = Maximum published non-railroaded width less 8"
- Maximum Width and Height for No-Drill Headrail is 84". Not available at all Retailers.

| Top Treatment | Legend | | |
|---|---|---|---|
| Medium Cassette | | | |
| Large Cassette | | | |
| Fabric Valance | | | |
| Open Roll | | | |

## Control System and Top Treatment Compatibility Chart - Continuous Cord Loop & InMotion™

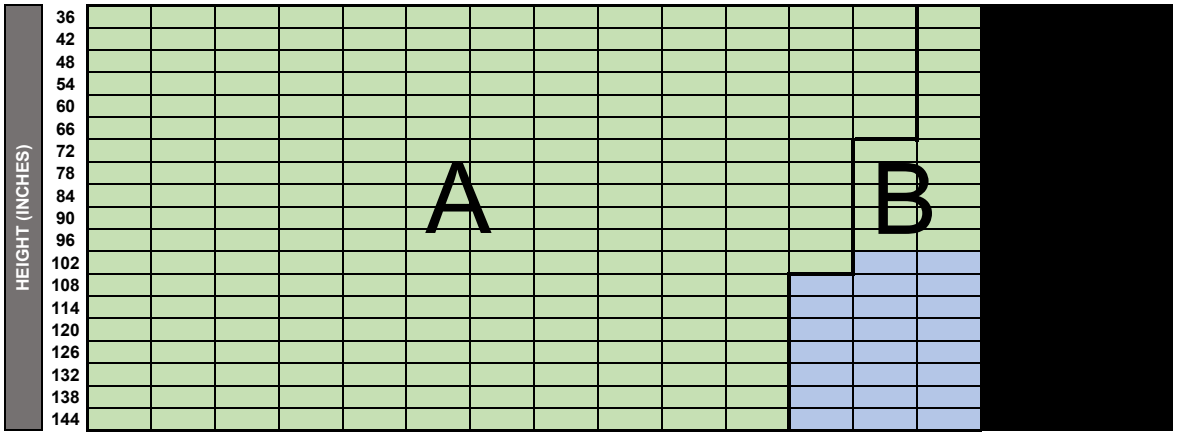


| Control Systems (Minimum height for all Control Systems is 12") | Minimium Width (Single Panel) | Minimum Height | Overall Minimium Width (2-on-1) | Specification Zone(s) |
|---|---|---|---|---|
| Continuous Cord Loop (Maximum height for 12" width is 60") | 12" | 12" | 24" | A, B & C |
| InMotion™ Wand | 21" | 12" | 43" | A & B |
| InMotion™ | 21 1/2" | 12" | 44" | A & B |


No-Drill Headrail available on InMotion™ with Medium Cassette only: Minimum Width for InMotion Wand is 22 1/2" and for InMotion Minimum Width is 22". Minimum height for both is 12". Not available at all Retailers.

| Collection Code | Collection Name | Max Width Non-Railroaded | Max Width Railroaded | Available with Seam |
|---|---|---|---|---|
| LF040 | Valhalla | 108 | N/A | No |

*Maximum width of continuous Deluxe Valance = Maximum published non-railroaded width less 8"
Maximum Width and Height for No-Drill Headrail is 84". Not available at all Retailers.

| Top Treatment | Legend | |
|---|---|---|
| Medium Cassette | | |
| Large Cassette | | |
| *Fabric Valance | | |
| Open Roll with Mounting Bar | | |

## Control System and Top Treatment Compatibility Chart - Perfect Placement™ Cordless

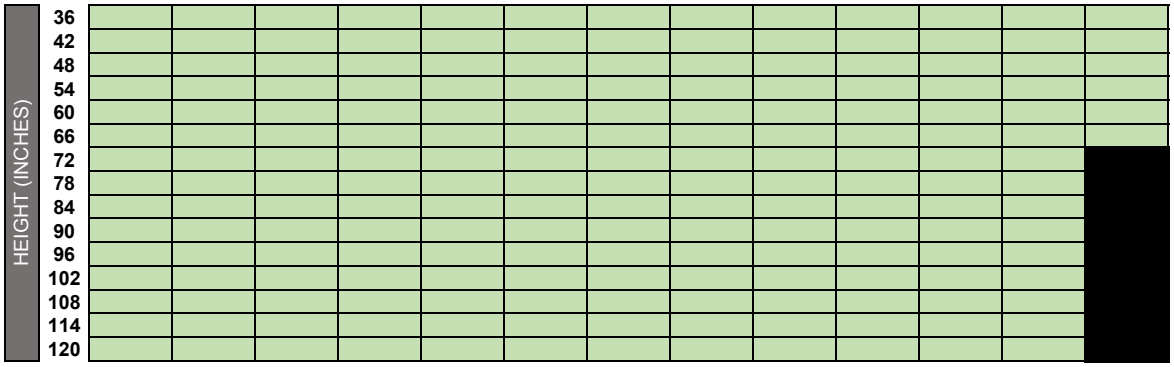


| Control Systems | Minimum Width (Single Panel) | Overall Minimum Width (2 on 1) | Minimum Height | Top Treatment |
|---|---|---|---|---|
| PerfectPlacement™ - Cordless | 18" | N/A | 24" | All |

No-Drill Headrail available on PerfectPlacement™ Cordless with Medium Cassette only: Minimum Width is 18 1/2". Minimum height is 24". Not available at all Retailers.


# PRODUCT SIZE SPECIFICATIONS

| Collection Code | Collection Name | Max Width Non-Railroaded | Max Width Railroaded | Available with Seam |
|---|---|---|---|---|
| LB058 | Vitality Blackout | 72" | 132" | Yes |

- Railroad Fabrics (turned width for length) will have a visible seam when fabricated longer than the maximum roll width less 16".
- **Red Box** in spec chart indicates shade sizes Heat Sealed Hem Bar for these sizes.
- Maximum width of continuous Fabric Valance = Maximum published non-railroaded width less 8"
- Maximum Width and Height for No-Drill Headrail is 84". Not available at all Retailers.

| Top Treatment | Legend | | |
|---|---|---|---|
| Medium Cassette | | | |
| Large Cassette | | | |
| Fabric Valance | | | |
| Open Roll | | | |

## Control System and Top Treatment Compatibility Chart - Continuous Cord Loop & InMotion™

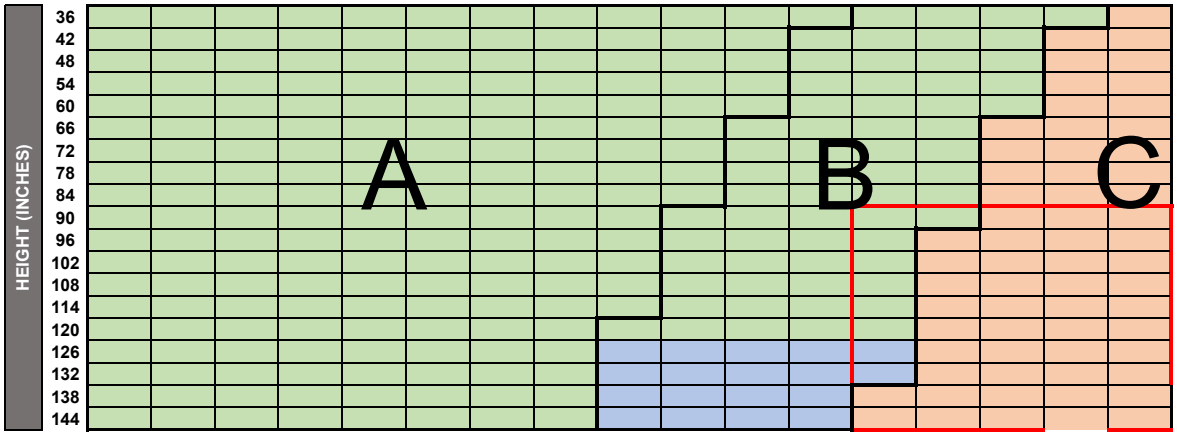


| Control Systems (Minimum height for all Control Systems is 12") | Minimum Width (Single Panel) | Minimum Height | Overall Minimum Width (2-on-1) | Specification Zone(s) |
|---|---|---|---|---|
| Continuous Cord Loop (Maximum height for 12" width is 60") | 12" | 12" | 24" | A, B & C |
| InMotion™ Wand | 21" | 12" | 43" | A & B |
| InMotion™ | 21 1/2" | 12" | 44" | A & B |


No-Drill Headrail available on InMotion™ with Medium Cassette only: Minimum Width for InMotion Wand is 22 1/2" and for InMotion Minimum Width is 22". Minimum height for both is 12". Not available at all Retailers.

| Collection Code | Collection Name | Max Width Non-Railroaded | Max Width Railroaded | Available with Seam |
|---|---|---|---|---|
| LB058 | Vitality Blackout | 72" | 102" | Yes |

*Maximum width of continuous Deluxe Valance = Maximum published non-railroaded width less 8"
Maximum Width and Height for No-Drill Headrail is 84". Not available at all Retailers.

| Top Treatment | Legend | |
|---|---|---|
| Medium Cassette | | |
| Large Cassette | | |
| *Fabric Valance | | |
| Open Roll with Mounting Bar | | |

## Control System and Top Treatment Compatibility Chart - Perfect Placement™ Cordless

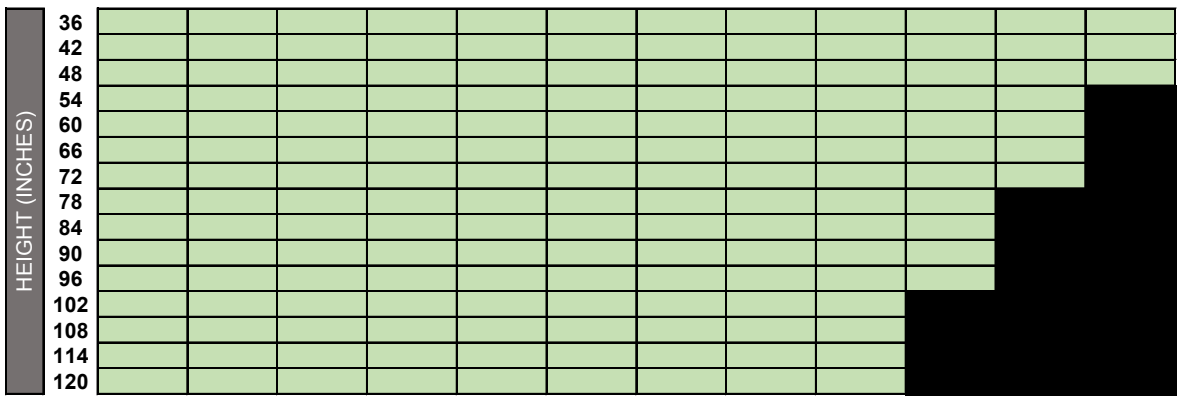


| Control Systems | Minimum Width (Single Panel) | Overall Minimum Width (2 on 1) | Minimum Height | Top Treatment |
|---|---|---|---|---|
| PerfectPlacement™ - Cordless | 18" | N/A | 24" | All |

No-Drill Headrail available on PerfectPlacement™ Cordless with Medium Cassette only: Minimum Width is 18 1/2". Minimum height is 24". Not available at all Retailers.


# PRODUCT SIZE SPECIFICATIONS

| Collection Code | Collection Name | Max Width Non-Railroaded | Max Width Railroaded | Available with Seam |
|---|---|---|---|---|
| LF035 | Waverly | 118" | N/A | No |

- Railroad Fabrics (turned width for length) will have a visible seam when fabricated longer than the maximum roll width less 16".
- **Red Box** in spec chart indicates shade sizes Heat Sealed Hem Bar for these sizes.
- Maximum width of continuous Fabric Valance = Maximum published non-railroaded width less 8"
- Maximum Width and Height for No-Drill Headrail is 84". Not available at all Retailers.

| Top Treatment | Legend | | |
|---|---|---|---|
| Medium Cassette | | | |
| Large Cassette | | | |
| Fabric Valance | | | |
| Open Roll | | | |

## Control System and Top Treatment Compatibility Chart - Continuous Cord Loop & InMotion™

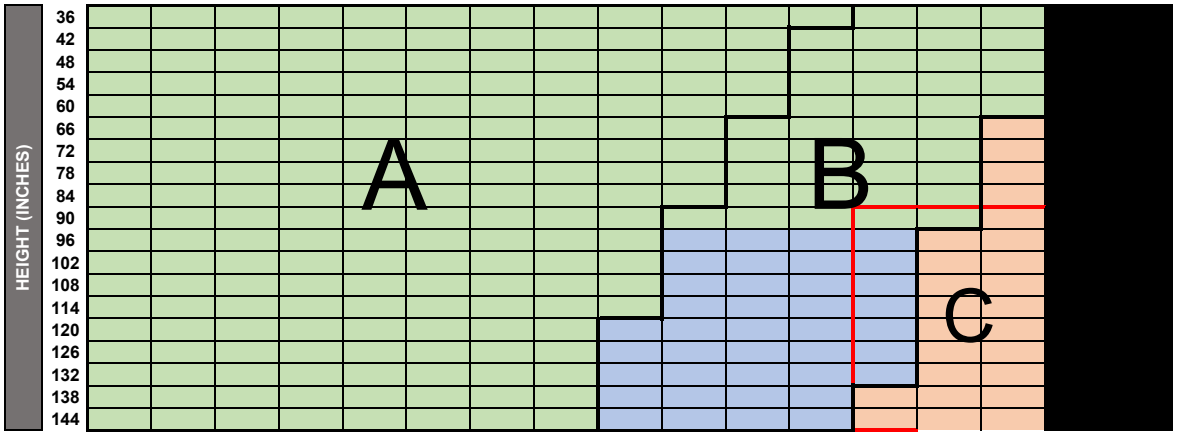


| Control Systems (Minimum height for all Control Systems is 12") | Minimium Width (Single Panel) | Minimum Height | Overall Minimium Width (2-on-1) | Specification Zone(s) |
|---|---|---|---|---|
| Continuous Cord Loop (Maximum height for 12" width is 60") | 12" | 12" | 24" | A, B & C |
| InMotion™ Wand | 21" | 12" | 43" | A & B |
| InMotion™ | 21 1/2" | 12" | 44" | A & B |


No-Drill Headrail available on InMotion™ with Medium Cassette only: Minimum Width for InMotion Wand is 22 1/2" and for InMotion Minimum Width is 22". Minimum height for both is 12". Not available at all Retailers.

| Collection Code | Collection Name | Max Width Non-Railroaded | Max Width Railroaded | Available with Seam |
|---|---|---|---|---|
| LF035 | Waverly | 108" | N/A | No |

*Maximum width of continuous Deluxe Valance = Maximum published non-railroaded width less 8"
Maximum Width and Height for No-Drill Headrail is 84". Not available at all Retailers.

| Top Treatment | Legend | |
|---|---|---|
| Medium Cassette | | |
| Large Cassette | | |
| *Fabric Valance | | |
| Open Roll with Mounting Bar | | |

## Control System and Top Treatment Compatibility Chart - Perfect Placement™ Cordless

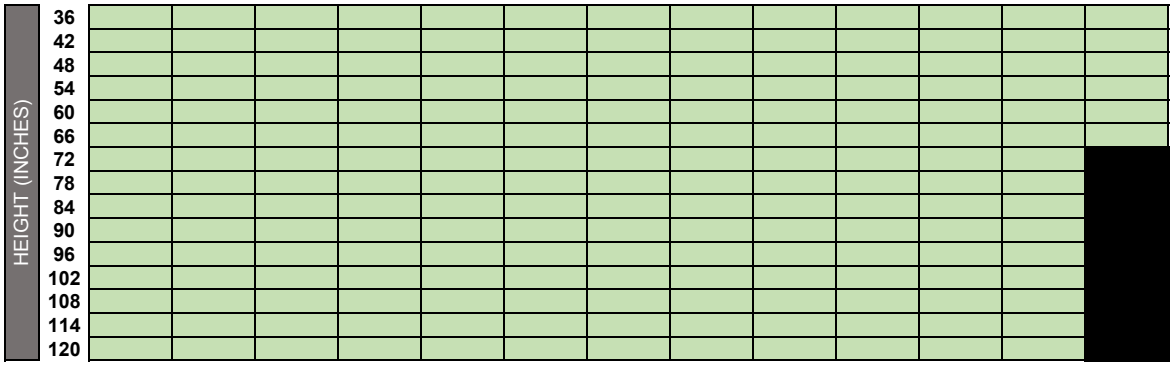


| Control Systems | Minimum Width (Single Panel) | Overall Minimum Width (2 on 1) | Minimum Height | Top Treatment |
|---|---|---|---|---|
| PerfectPlacement™ - Cordless | 18" | N/A | 24" | All |

No-Drill Headrail available on PerfectPlacement™ Cordless with Medium Cassette only: Minimum Width is 18 1/2". Minimum height is 24". Not available at all Retailers.


# PRODUCT SIZE SPECIFICATIONS

| Collection Code | Collection Name | Max Width Non-Railroaded | Max Width Railroaded | Available with Seam |
|---|---|---|---|---|
| LB035 | Waverly Blackout | 118" | N/A | No |

- Railroad Fabrics (turned width for length) will have a visible seam when fabricated longer than the maximum roll width less 16".
- **Red Box** in spec chart indicates shade sizes Heat Sealed Hem Bar for these sizes.
- Maximum width of continuous Fabric Valance = Maximum published non-railroaded width less 8"
- Maximum Width and Height for No-Drill Headrail is 84". Not available at all Retailers.

| Top Treatment | Legend | | |
|---|---|---|---|
| Medium Cassette | | | |
| Large Cassette | | | |
| Fabric Valance | | | |
| Open Roll | | | |

## Control System and Top Treatment Compatibility Chart - Continuous Cord Loop & InMotion™

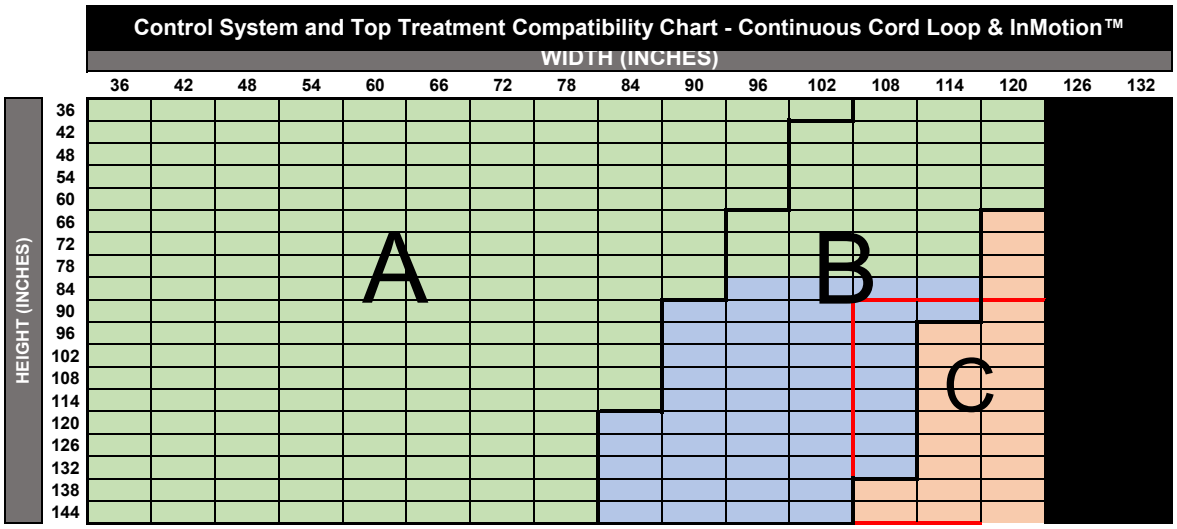


| Control Systems (Minimum height for all Control Systems is 12") | Minimium Width (Single Panel) | Minimum Height | Overall Minimium Width (2-on-1) | Specification Zone(s) |
|---|---|---|---|---|
| Continuous Cord Loop (Maximum height for 12" width is 60") | 12" | 12" | 24" | A, B & C |
| InMotion™ Wand | 21" | 12" | 43" | A & B |
| InMotion™ | 21 1/2" | 12" | 44" | A & B |


No-Drill Headrail available on InMotion™ with Medium Cassette only: Minimum Width for InMotion Wand is 22 1/2" and for InMotion Minimum Width is 22". Minimum height for both is 12". Not available at all Retailers.

| Collection Code | Collection Name | Max Width Non-Railroaded | Max Width Railroaded | Available with Seam |
|---|---|---|---|---|
| LB035 | Waverly Blackout | 108" | N/A | No |

*Maximum width of continuous Deluxe Valance = Maximum published non-railroaded width less 8"
Maximum Width and Height for No-Drill Headrail is 84". Not available at all Retailers.

| Top Treatment | Legend | |
|---|---|---|
| Medium Cassette | | |
| Large Cassette | | |
| *Fabric Valance | | |
| Open Roll with Mounting Bar | | |

## Control System and Top Treatment Compatibility Chart - Perfect Placement™ Cordless

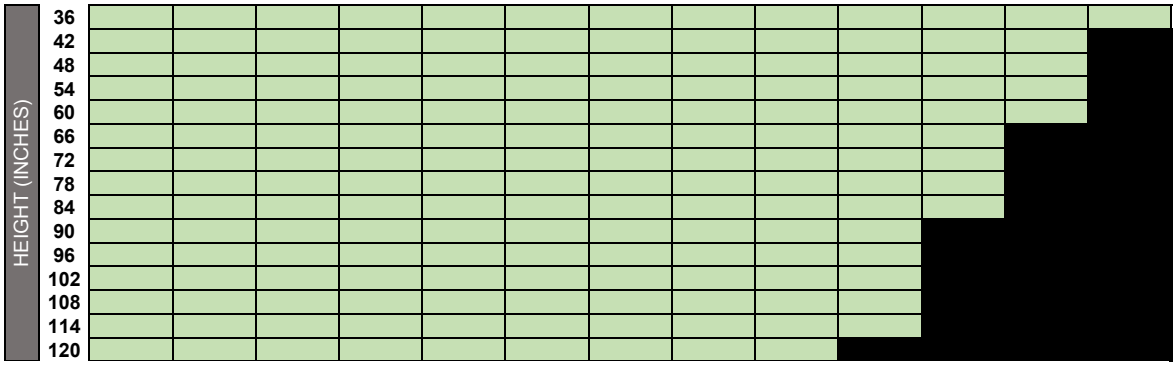


| Control Systems | Minimum Width (Single Panel) | Overall Minimum Width (2 on 1) | Minimum Height | Top Treatment |
|---|---|---|---|---|
| PerfectPlacement™ - Cordless | 18" | N/A | 24" | All |

No-Drill Headrail available on PerfectPlacement™ Cordless with Medium Cassette only: Minimum Width is 18 1/2". Minimum height is 24". Not available at all Retailers.


# PRODUCT SIZE SPECIFICATIONS

| Collection Code | Collection Name | Max Width Non-Railroaded | Max Width Railroaded | Available with Seam |
|---|---|---|---|---|
| LF020 | Westport | 118" | N/A | No |

- Railroad Fabrics (turned width for length) will have a visible seam when fabricated longer than the maximum roll width less 16".
- **Red Box** in spec chart indicates shade sizes Heat Sealed Hem Bar for these sizes.
- Maximum width of continuous Fabric Valance = Maximum published non-railroaded width less 8"
- Maximum Width and Height for No-Drill Headrail is 84". Not available at all Retailers.

| Top Treatment | Legend | | |
|---|---|---|---|
| Medium Cassette | | | |
| Large Cassette | | | |
| Fabric Valance | | | |
| Open Roll | | | |

## Control System and Top Treatment Compatibility Chart - Continuous Cord Loop & InMotion™

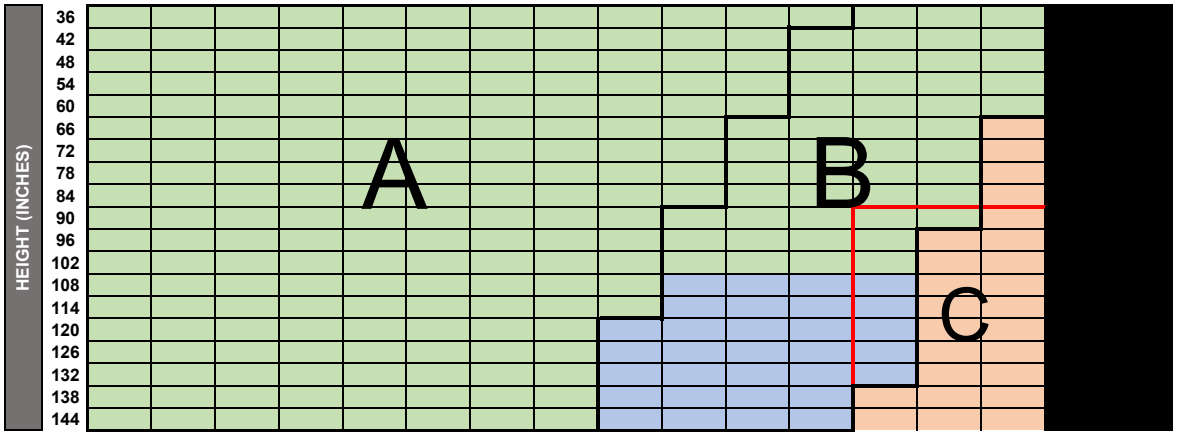


| Control Systems (Minimum height for all Control Systems is 12") | Minimum Width (Single Panel) | Minimum Height | Overall Minimum Width (2-on-1) | Specification Zone(s) |
|---|---|---|---|---|
| Continuous Cord Loop (Maximum height for 12" width is 60") | 12" | 12" | 24" | A, B & C |
| InMotion™ Wand | 21" | 12" | 43" | A & B |
| InMotion™ | 21 1/2" | 12" | 44" | A & B |


No-Drill Headrail available on InMotion™ with Medium Cassette only: Minimum Width for InMotion Wand is 22 1/2" and for InMotion Minimum Width is 22". Minimum height for both is 12". Not available at all Retailers.

| Collection Code | Collection Name | Max Width Non-Railroaded | Max Width Railroaded | Available with Seam |
|---|---|---|---|---|
| LF020 | Westport | 108" | N/A | No |

*Maximum width of continuous Deluxe Valance = Maximum published non-railroaded width less 8"
Maximum Width and Height for No-Drill Headrail is 84". Not available at all Retailers.

| Top Treatment | Legend | |
|---|---|---|
| Medium Cassette | | |
| Large Cassette | | |
| *Fabric Valance | | |
| Open Roll with Mounting Bar | | |

## Control System and Top Treatment Compatibility Chart - Perfect Placement™ Cordless

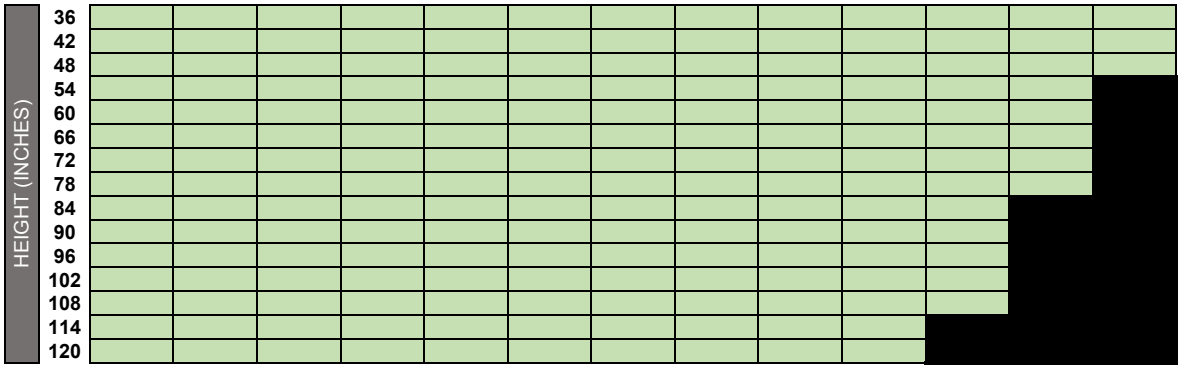


| Control Systems | Minimum Width (Single Panel) | Overall Minimum Width (2 on 1) | Minimum Height | Top Treatment |
|---|---|---|---|---|
| PerfectPlacement™ - Cordless | 18" | N/A | 24" | All |

No-Drill Headrail available on PerfectPlacement™ Cordless with Medium Cassette only: Minimum Width is 18 1/2". Minimum height is 24". Not available at all Retailers.


# PRODUCT SIZE SPECIFICATIONS

| Collection Code | Collection Name | Max Width Non-Railroaded | Max Width Railroaded | Available with Seam |
|---|---|---|---|---|
| LB020 | Westport Blackout | 114" | N/A | No |

- Railroad Fabrics (turned width for length) will have a visible seam when fabricated longer than the maximum roll width less 16".
- **Red Box** in spec chart indicates shade sizes Heat Sealed Hem Bar for these sizes.
- Maximum width of continuous Fabric Valance = Maximum published non-railroaded width less 8"
- Maximum Width and Height for No-Drill Headrail is 84". Not available at all Retailers.

| Top Treatment | Legend | | |
|---|---|---|---|
| Medium Cassette | | | |
| Large Cassette | | | |
| Fabric Valance | | | |
| Open Roll | | | |

## Control System and Top Treatment Compatibility Chart - Continuous Cord Loop & InMotion™

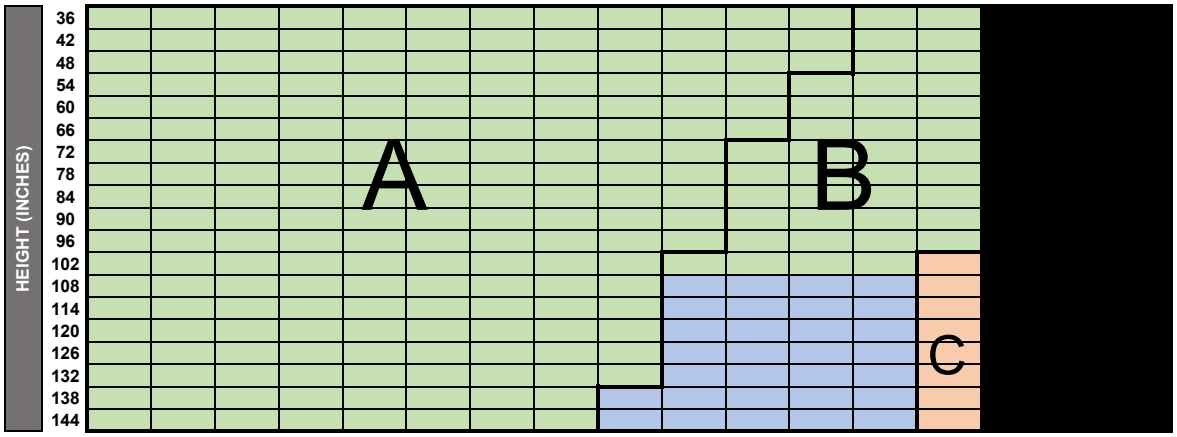


| Control Systems (Minimum height for all Control Systems is 12") | Minimium Width (Single Panel) | Minimum Height | Overall Minimium Width (2-on-1) | Specification Zone(s) |
|---|---|---|---|---|
| Continuous Cord Loop (Maximum height for 12" width is 60") | 12" | 12" | 24" | A, B & C |
| InMotion™ Wand | 21" | 12" | 43" | A & B |
| InMotion™ | 21 1/2" | 12" | 44" | A & B |


No-Drill Headrail available on InMotion™ with Medium Cassette only: Minimum Width for InMotion Wand is 22 1/2" and for InMotion Minimum Width is 22". Minimum height for both is 12". Not available at all Retailers.

| Collection Code | Collection Name | Max Width Non-Railroaded | Max Width Railroaded | Available with Seam |
|---|---|---|---|---|
| LB020 | Westport Blackout | 102" | N/A | No |

*Maximum width of continuous Deluxe Valance = Maximum published non-railroaded width less 8"
Maximum Width and Height for No-Drill Headrail is 84". Not available at all Retailers.

| Top Treatment | Legend | |
|---|---|---|
| Medium Cassette | | |
| Large Cassette | | |
| *Fabric Valance | | |
| Open Roll with Mounting Bar | | |

## Control System and Top Treatment Compatibility Chart - Perfect Placement™ Cordless

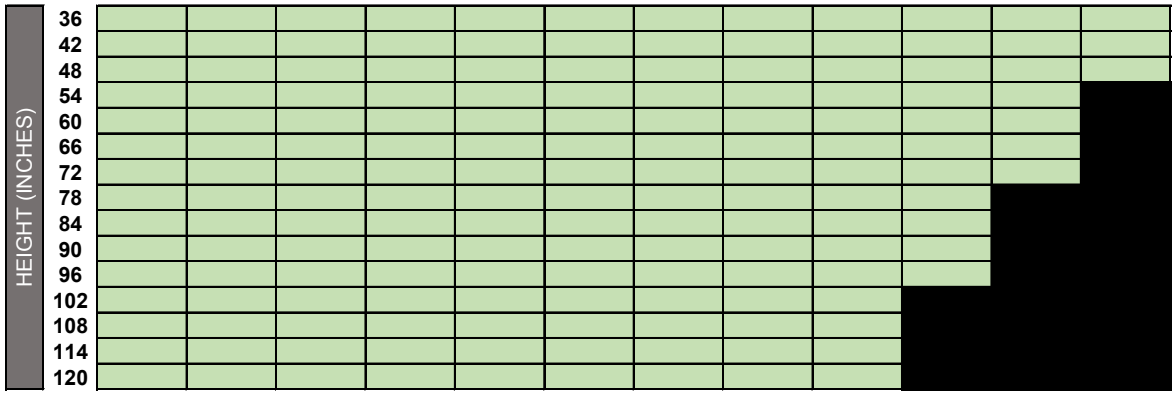


| Control Systems | Minimum Width (Single Panel) | Overall Minimum Width (2 on 1) | Minimum Height | Top Treatment |
|---|---|---|---|---|
| PerfectPlacement™ - Cordless | 18" | N/A | 24" | All |

No-Drill Headrail available on PerfectPlacement™ Cordless with Medium Cassette only: Minimum Width is 18 1/2". Minimum height is 24". Not available at all Retailers.

# OPERATING SYSTEM: CONTINUOUS CORD LOOP

**Continuous Cord Loop**

This operating systems features a continuous bead chain loop with tensioner. As the clutch with attached chain is pulled up and down, it rotates the roller tube, enabling the roller shade to be lowered and raised. Bead stops are included to set at upper and lower shade limits.

• Universal brackets – color coordinated to clutch (Black or White)



### Defaulted Chain Loop Length

| Shade Height | Loop Drop |
|---|---|
| **12" to 15 7/8" | 2/3 of Shade Height |
| **16" to 31 7/8" | 2/3 of Shade Height |
| 32" to 37 7/8" | 24" loop |
| 38" to 43 7/8" | 30" loop |
| 44" to 52 7/8" | 36" loop |
| 53" to 61 7/8" | 42" loop |
| 62" to 70 7/8" | 48" loop |
| 71" to 79 7/8" | 54" loop |
| 80" to 88 7/8" | 60" loop |
| 89" to 96 7/8" | 66" loop |
| 97" to 105 7/8" | 72" loop |
| 106" to 123 7/8" | 84" loop |
| 124" to 144" | 96" loop |

**Sizes require metal chain

Tensioner will color coordinate with fabric color.
(Changing the tensioner color is not an available option.)

Plastic bead chains are available in the following colors:
• Black • Bronze • Vanilla • White • Gray

Stainless Steel chain is available at no additional charge

**NOTE:** Stainless steel chain is recommended for all shades over 108" x 90". To avoid heavy pull force with the Continuous Cord Loop shade, InMotion™ is a great options with a minimal surcharge.



Black Gray White Vanilla Bronze

# OPERATING SYSTEMS: PERFECTPLACEMENT™ CORDLESS

**PerfectPlacement™ Cordless**

- Effortless positioning of the shade by simply raising & lowering the shade to the desired position.
- Maximum Size: 108" x 120" (varies by fabric)
- Minimum Size: 18" x 24"
- Available with
  - All fabric & screen collections and top treatments
  - Standard or reversed roll (Reversed roll is not available with curved cassette)
  - Single shade (not available 2-on-1 or 3-on-1)
  - Omni Curved Wrapped, Bottom Rail
  - Handles are enclosed to help keep fabric-wrapped bottomrail clean. 2 handles will be provided for shades wider than 42"
  - Extension pole is available to use with handles on curved Omni Bottom rail when shades are hard to reach. Surcharge applies.



# TOP TREATMENT – CASSETTES

**Curved Cassette**

- Sizes: Medium (3-1/8" height x 3-3/4" depth)
  Large (3-7/8" height x 3-7/8" depth)
- Available in Matte Colors – White, Vanilla, Silver, Bronze, Black
- Features a fabric insert in the same fabric used for the shade. Insert fabric will run the same direction as the fabric of the shade.
- Available with all operating systems except for AC motors
- No Reverse Roll



# OVERVIEW INMOTION™ WAND

**OPTIONS:**

Wand colors: White, Vanilla, Gray, Bronze, Black. (Preselected based on fabric color)
Wand lengths: 1 ft (12"), 2 ft (24"), 3 ft (36"), 4 ft (48"), 5 ft (60), 6 ft (72")
Can be ordered for right or left side placement
One plug-in charger is required for each order






## Motorization Overview

**LEVOLOR® INMOTION™**


Experience motorization like never before with smart home integration and automated scheduling.
Take full control of your shades using voice command, the intuitive app, or remote.

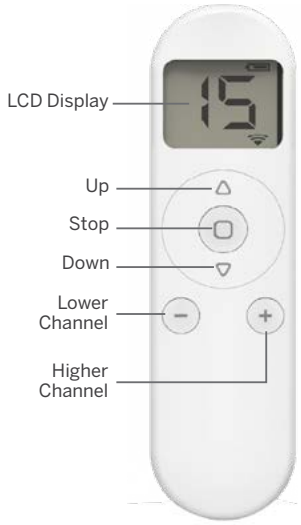


**Standard Remote**
Requires 2 x AAA batteries, included.



**Hub**
Requires 5V 2A adapter, included.
Connect up to 30 shades per hub.

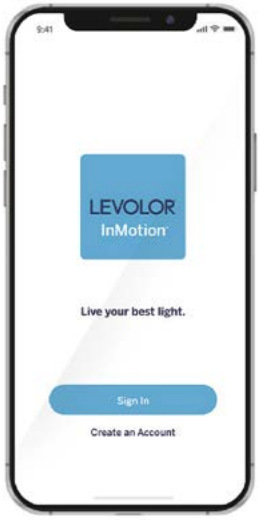


**App**
Phone sold separately

**App Requirements:**
- LEVOLOR Hub
- 2.4 GHz Wi-Fi Network
- Apple® iOS10.0 or newer
- Android™4 .1 or newer

**Works With:**
- Amazon Alexa
- Google Home
- IFTT
- Samsung SmartThings
- Siri

- Upgrade to motorization to control shades with remote or app.
- Powered by an integrated, rechargable lithium-ion battery.
- Recharge with included magnetic micro-USB charger.
- Control shades with the 15-channel remote (sold separately).
- Add the hub (sold separately) to sync with your Wi-Fi to enable app control and smart home integration.
- Organize shades by room.
- See real-time shade position and battery charge status.
- Store preset shade positions as scenes.
- Create routines by scheduling scenes by day of week and time of day, even proximity to sunrise or sunset.
- Adjust shades when you are away from home.
- App available to download for iOS and Android devices.

**Visit LEVOLOR.com/InMotion for additional information.**

**NOTE:** LEVOLOR® InMotion™ is not compatible with products from the previous LEVOLOR® motorization program.
This includes blinds/shades that are controlled with the previous LEVOLOR app, 3-channel remote, and 6-channel remote.

For additional information visit LEVOLOR.com

# InMotion™ Accessories Overview

## LEVOLOR® INMOTION™ WALL SWITCH



The InMotion™ Wall Remote lets you achieve effortless light control with the touch of a button, mounted to a wall to avoid misplacement. A great solution for hard to reach windows or in grand rooms with various automated solutions.

- Integrates with the LEVOLOR InMotion™ App or simply works by itself
- Operates an unlimited number of LEVOLOR motorized window coverings
- Features a clean, modern design with easy to use controls
- Activate group control and favorite position with a touch of a button
- Control up to 15-channels from one remote
- Hide unused channels for faster channel selection and scrolling
- Locking feature to prevent accidental programming changes
- No need to cut in to wall with the wireless design
- Dimensions: 3.4" L x 3.4" W x 0.7" D

## LEVOLOR® INMOTION™ SOLAR PANEL



Harness the power of solar energy to power your motorized blinds and shades, ensuring reliable and efficient performance. A great choice for hard to reach windows.

- One Solar Panel per shade or blind is needed
- Easy to install and the low profile design is easy to conceal
- Provides a continuous charge to internal rechargeable batteries
- Syncs with the LEVOLOR InMotion™ App to show battery level
- Not recommended on north facing windows
- Micro USB charging cable, 59" long (included)
- Can be added to any existing InMotion™ blind or shade
- Dimensions: 18.7" L x 2" W x .30" D

## FABRIC VALANCE


- Available with Roller Shade or as a stand alone cornice.
- Has clear edge groovers to hold the coordinating fabric in place.
- Standard height 3-5/8”
- Direction of fabric insert follows shade installed below.
- If valance is wider than material width, and shade below is not railroaded; valance fabric insert will be made with a center seamed like image shown below.





- Default return length:
  - Inside Mount: No returns
  - Outside Mount: 3 1/2" (overall length 4 1/4")


**Note:** When ordering returns, valance corner cap adds 3/4” to the valance return depth.

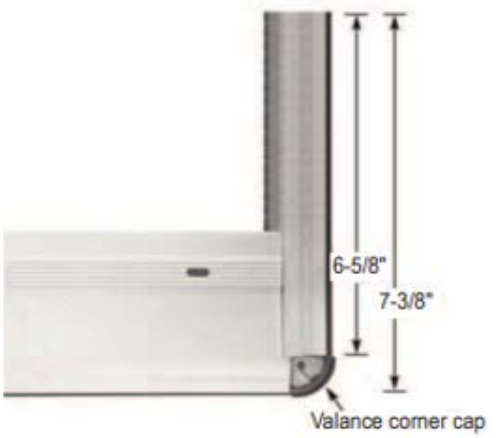


## PRIVACY SIDE CHANNELS

**Privacy Side Channels**

- Available in 5 colors: White, Gray, Vanilla, Bronze and Black
- Inside Mount Only
- High quality PVC light block installs in minutes
- Option offers additional privacy and room darkening
- Available with Cordless, InMotion™ Wand and InMotion™ operating systems
- If Privacy Side Channels are selected, a 1/2” will be deducted in addition to the 1/4” for inside mount

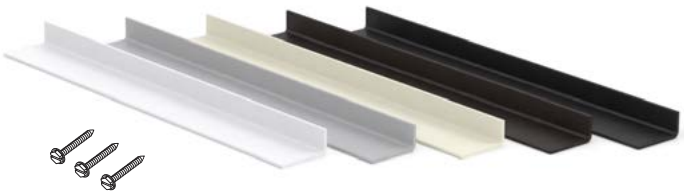

Surcharge applies.

# RAILROADED MATERIAL

**Railroaded Material**
Railroaded material is when the fabric is turned on its side; using the material roll length for the shade width to increase the maximum width when available. Depending on the weaves/construction, many of the fabric collections can be railroaded but with visible seam when the shade is extended. Fabrics that are railroaded may curl along the edge.


When a shade needs to be railroaded, it is highly recommended to railroad all other shades within the same room for a uniform look.

Seams may be visible when the shade is fully extended. Seams will be placed as close to the tube as possible, location may varied depending upon roll width and shade height.

Although we maintain the highest quality standards, an exact pattern match at the seam on individual shades cannot be guaranteed. Pattern matches from shade to shade, horizontally or vertically, on multiple shade orders cannot be guaranteed.



# BOTTOMRAIL OPTIONS

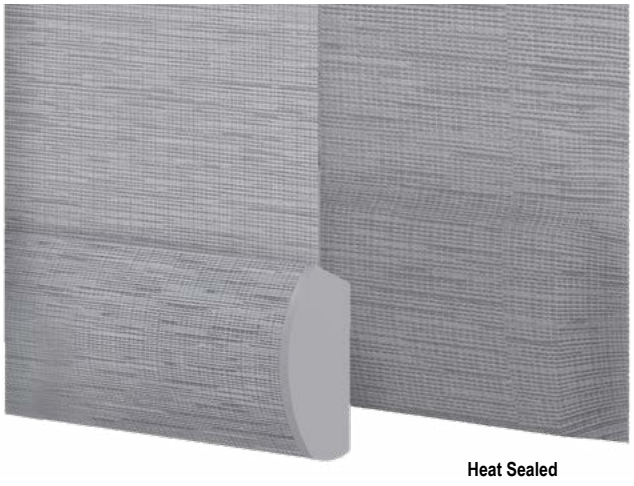

**Heat Sealed**


**Omni Curved (Wrapped)**

**Heat Sealed Aluminum (1-1/4")**
The aluminum bar is inserted and heat sealed into the hem pocket. Heat Seal Hem bar is highly recommended on bigger and wider shades made with railroaded or heavier material to improve appearance of the shades. The hem bar helps reduce waviness, twisting, cupping & curling.

Not available on all styles. Please refer to the Collection Information section on pages 2-3.



Heat sealed hem to back pocket edges come sealed



*Heat sealed hem bar is highly recommended when shade is ordered with railroaded material or when shade is equal, wider than 108" or longer than 90".*

**Omni Bottom Rail (~1-1/8")**
Available in White, Vanilla, Bronze, Black, and Silver matte finishes. Only front face of rail is wrapped.


Bottomrail End Caps are color coordinated to the bottomrail. Changing color of the end cap is not an option.

# ADDITIONAL OPTIONS


## ROLL DIRECTION

When ordering, please be sure to specify **ROLL DIRECTION**

- Extended Projection Bracket
  (not available with Curved Cassette)



Standard – Toward the glass



Reverse – Away from the glass
(available under No Top Treatment, and Fabric Cornice)


## 2-ON-1 OPTIONS – SPECIFY ON ORDER

- A two-on-on shade is two individual shades housed under one continuous top treatment.
- Top Treatment: Medium/Large Curved Cassette.
- Operating System: Continuous Cord Loop, InMotion™ Wand and InMotion™.
- Control Position: Left for left panel and right for right panel.
- Middle gap between the 2 shades is 1/2". Please refer to the Product Size Specifications for individual shade sizes and Feature & Options for option availability.
  - Tolerance: Height <= 60", +1/4"; Height <=120", +3/8"; Height > 120", +1/2"
- Price as 2 separate shades added together.
- Heat sealed hem bottom rail is strongly recommended to improve the appearance of the shade. It will help minimize waviness, twisting, cupping, and curling, especially on shade greater than 108" x 90".

NOTE: There is a 1/2" Continuous Cord Loop Control between the two shades. Please refer to the Product Size Specifications for individual shade sizes and Features and Options for option availability.

## MAGNETIC HOLD DOWN BRACKET

- Available for all control systems
- Available with all bottom rail options
- Outside Mount Only
- Shade will ship with magnets attached onto the bottom rail
- Not available for reverse roll
- Magnet and Catch are Silver Color



## CLEANING AND CARE INFORMATION

- Periodic vacuum using an upholstery attachment when shade is dusty. Dust also can gently remove with a dusting cloth.
- Do not immerse the shade in the water. Shade may be gently clean with a damp cloth. After cleaning, keep the shade lowered to allow the shade to dry completely before raising the shade.
- Loose fibers may appear on material edges from time to time. This is normal and does not affect the overall integrity of the shade. Simply trim off the loose fibers with a pair of sharp scissors.

**Fabric & Shade Recommendations**

- To ensure color consistency and minimize dye lot variation, order all shades for the same room at the same time.
- When a shade needs to be railroaded, railroad all other shades within the same room for uniform look.
- Heat sealed hem bar is highly recommended with large shades for best shade appearance.
- Heavy shades may require some assistance to lift. PerfectPlacement™ Cordless, and InMotion™ Wand are an affordable way to replace Continuous Cord Loop and transition to a contemporary look.

**Large Roller Shades Solutions**

Most fabrics can be railroaded as an option for wider roller shades. Railroad is when material is turned 90° clockwise (using the roll length for the shade width). LEVOLOR® has performed extensive testing on all fabrics at various width to ensure customers are provided with high quality shades. However, there may be some visual differences when fabric is railroaded for shades wider than 90". These differences are consider normal characteristics.

- Fabrics may curl along the edge or have slight overall waviness
- A slight V may appear in the center of the shade due to the weight of the fabric
- Tube deflection

As the above characteristics are normal and expected with very wide shades, requests for remakes and/or credits will not be considered. We suggest reducing the shade width by splitting the one wide shade to two or more individual shades.







# MOUNTING REQUIREMENTS

| INSIDE MOUNT (IM) | Minimum Mounting Depth | Flush Mounting Depth |
|---|---|---|
| No Top Treatment | 1-3/8" | 2-1/8" to 4" (depending on roll diameter) |
| PerfectPlacement™ Cordless Lift | 1-3/8" | 2-1/8" to 4" (depending on roll diameter) |
| Medium Curved Cassette | 1-1/2" | 3-3/4" |
| Large Curved Cassette | 1-1/2" | 4-3/8" |
| Fabric Valance (with returns) | 1-7/8" | 4-1/4" |
| Fabric Valance (without returns) | 1-1/4" | 3-1/8" |
| Medium Curved Cassette with No-Drill Headrail | N/A | 4" |

**NOTE:** No-Drill Headrail not available at all Retailers.

| OUTSIDE MOUNT (OM) | Minimum Mounting Surface Height |
|---|---|
| Continuous Cord Loop | 1-5/8" |
| PerfectPlacement™ Cordless Lift | 1-5/8" |
| Medium Curved Cassette | 3-1/8" |
| Large Curved Cassette | 4" |
| Fabric Valance | 2" |

| TWO ON ONE SHADE SIZE STANDARDS | |
|---|---|
| Minimum ordered width - Cassette Valance | 16" |
| Maximum ordered width - Cassette Valance | 144" |
| Maximum Height | See Spec Chart |
| Center Gap | *1/2" |

*Not available for PerfectPlacement™ Cordless Lift

# TOP TREATMENT ONLY

| FABRIC VALANCE (ONLY) | INSIDE MOUNT (IM) | OUTSIDE MOUNT (OM) |
|---|---|---|
| Valance Width Tip to Tip (no returns) | 3/16 less than ordered width | N/A |
| Valance Width Tip to Tip (with returns) | N/A | 1-3/8 **greater** than ordered width |

# FINISHED DIMENSIONS

**Adjustments are taken from ordered dimensions. Width and height may vary ± 1/8"**

## Continuous Cord Loop Shades

**For all options, Shade Height = Ordered Height**

| | | Inside Mount (IM) | Outside Mount (OM) |
|---|---|---|---|
| **Open Roll** (No Top Treatment) | Shade Width | 3/16" less than ordered width | Ordered Width |
| | Fabric & Tube Width (no end caps) | 1-3/16" less than ordered width | N/A |
| | Fabric & Tube Width (with end caps) | 1-5/16" less than ordered width | 1-1/8" less than ordered width |
| | *Control Side (in)* | 11/16" | 9/16" |
| | *Idler Side (in)* | 1/2" | 7/16" |

| | | | |
|---|---|---|---|
| **Fabric Valance** | Valance Width (no returns) | 3/16" less than ordered width | Ordered Width |
| | Valance Width (with returns) | 1-3/8" **greater** than ordered width | 1-3/8" **greater** than ordered width |
| | Fabric & Tube Width | 1-3/16" less than ordered width | 1-1/8" less than ordered width |
| | *Control Side (in) - Skyline* | 11/16" | 9/16" |
| | *Idler Side (in) - Skyline* | 1/2" | 7/16" |

| | | | |
|---|---|---|---|
| **Medium/Large Curved Cassette** | Cassette Width | 3/16" less than ordered width | Ordered Width |
| | Fabric & Tube Width | 1-5/16" less than ordered width | 1-1/8" less than ordered width |
| | *Control Side (in)* | 13/16" | 11/16" |
| | *Idler Side (in)* | 1/2" | 7/16" |

## PERFECTPLACEMENT™ CORDLESS LIFT

**For all options, Shade Height = Ordered Height**

| | | Inside Mount (IM) | Outside Mount (OM) |
|---|---|---|---|
| **Open Roll** (No Top Treatment) | Shade Width (with end caps) | 1/8" less than order width | Ordered width |
| | Fabric/Tube Width (with end caps) | 1 1/2" less than order width | 1-3/8" less than ordered width |
| | *Control Side (in)* | 13/16" | 3/4" |
| | *Idler Side (in)* | 11/16" | 5/8" |

| | | | |
|---|---|---|---|
| **Fabric Valance** | Valance Width (no returns) | 3/16" less than ordered width | Ordered width |
| | Valance Width (with returns) | 1-3/8" **greater** than ordered width | 1-3/8" **greater** than ordered width |
| | Fabric/Tube Width | 1-1/2" less than order width | 1-3/8" less than ordered width |
| | *Control Side (in)* | 13/16" | 3/4" |
| | *Idler Side (in)* | 11/16" | 5/8" |

| | | | |
|---|---|---|---|
| **Medium/Large Curved Cassette** | Cassette Width | 3/16" less than ordered width | Ordered width |
| | Fabric/Tube Width | 1-15/16" less than ordered width | 1-1/8" less than ordered width |
| | *Control Side (in)* | 7/8" | 3/4" |
| | *Idler Side (in)* | 1/2" | 7/16" |

- Fabric width + 1/4" to determine width of bottom rail with end caps. For shade with heat sealed hem bar, bottom rail width equates to fabric width.
- Shade width for open roll is measured from bracket end to bracket end (valance width measured separately).
- For shades with cassette, shade width is measured from cassette end cap to top treatment end cap.

# FINISHED DIMENSIONS

**Adjustments are taken from ordered dimensions. Width and height may vary ± 1/8"**

## INMOTION™ MOTORIZATION

**For all options, Shade Height = Ordered Height**

| | | Inside Mount (IM) | Outside Mount (OM) |
|---|---|---|---|
| **Open Roll** (No Top Treatment) | Shade Width | 3/16" less than ordered width | Ordered Width |
| | Fabric & Tube Width (no end caps) | 1-1/4" less than ordered width | 1-1/16" less than ordered width |
| | Fabric & Tube Width (with end caps) | 1-3/8" less than ordered width | 1-3/16" less than ordered width |
| | *Control Side (in)* | 13/16" | 11/16" |
| | *Idler Side (in)* | 7/16" | 3/8" |
| **Fabric Valance** | Valance Width (no returns) | 3/16" less than ordered width | Ordered Width |
| | Valance Width (with returns) | 1-3/8" **greater** than ordered width | 1-3/8" **greater** than ordered width |
| | Fabric & Tube Width | 1-1/4" less than ordered width | 1-3/16" less than ordered width |
| | *Control Side (in)* | 13/16" | 3/4" |
| | *Idler Side (in)* | 7/16" | 7/16" |
| **Medium/Large Curved Cassette** | Cassette Width | 3/16" less than ordered width | Ordered Width |
| | Fabric & Tube Width (with end caps) | 1-1/2" less than ordered width | 1-5/16" less than ordered width |
| | *Control Side (in)* | 7/8" | 3/4" |
| | *Idler Side (in)* | 5/8" | 9/16" |

## INMOTION™ WAND

**For all options, Shade Height = Ordered Height**

| | | Inside Mount (IM) | Outside Mount (OM) |
|---|---|---|---|
| **Open Roll** (No Top Treatment) | Shade Width | 3/16" less than ordered width | Ordered Width |
| | Fabric & Tube Width (no end caps) | 1-3/16" less than ordered width | 1" less than ordered width |
| | Fabric & Tube Width (with end caps) | 1-5/16" less than ordered width | 1-1/8" less than ordered width |
| | *Control Side (in)* | 13/16" | 11/16" |
| | *Idler Side (in)* | 3/8" | 5/16" |
| **Fabric Valance** | Valance Width (no returns) | 3/16" less than ordered width | Ordered Width |
| | Valance Width (with returns) | 1-3/8" **greater** than ordered width | 1-3/8" **greater** than ordered width |
| | Fabric & Tube Width | 1-3/16" less than ordered width | 1-1/8" less than ordered width |
| | *Control Side (in)* | 13/16" | 3/4" |
| | *Idler Side (in)* | 3/8" | 3/8" |
| **Medium/Large Curved Cassette** | Cassette Width | 3/16" less than ordered width | Ordered Width |
| | Fabric & Tube Width (with end caps) | 1-7/16" less than ordered width | 1-1/4" less than ordered width |
| | *Control Side (in)* | 7/8" | 3/4" |
| | *Idler Side (in)* | 9/16" | 1/2" |

- Fabric width + 1/4" to determine width of bottom rail with end caps. For shade with heat sealed hem bar, bottom rail width equates to fabric width.
- Shade width for open roll is measured from bracket end to bracket end (valance width measured separately).
- For shades with cassette, shade width is measured from cassette end cap to top treatment end cap.

# SOLAR OPTICAL INFORMATION

The following pages contain solar optical information by pattern and color, it is important to understand the numbers and how they work best to your need.

## OPENNESS FACTOR (OF):

OF is a property that is often used to describe a screen material. The definition of OF is the percentage of the screen's surface area that is “open". The OF only describes one of the factors that regulates the amount of light passing through a roller shade.

The OF and color coating together will decide how open the (shade) material will become. Different material colors absorb light differently. For example, a dark colored car is hotter than a light colored car.


Sunlight that hits the shade surface is divided into three parts that together make 100 % of the incoming light. The picture below illustrates the phenomenon.

**TRANSMISSION**: One part of the light will pass through the shade, and that is the part of the light that comes into the room. *The lower the number, the better.*

The transmission value tells how much light passes through the fabric. The transmission is dependent on three factors;
- the openness factor of the fabric
- the color of the fabric
- the coating on the fabric.

**REFLECTION**: One part of the light will be reflected when it hits the shade. *The higher the number, the better.*

**ABSORPTION**: The rest of the light will be absorbed by the shade. *The lower the number, the better.*

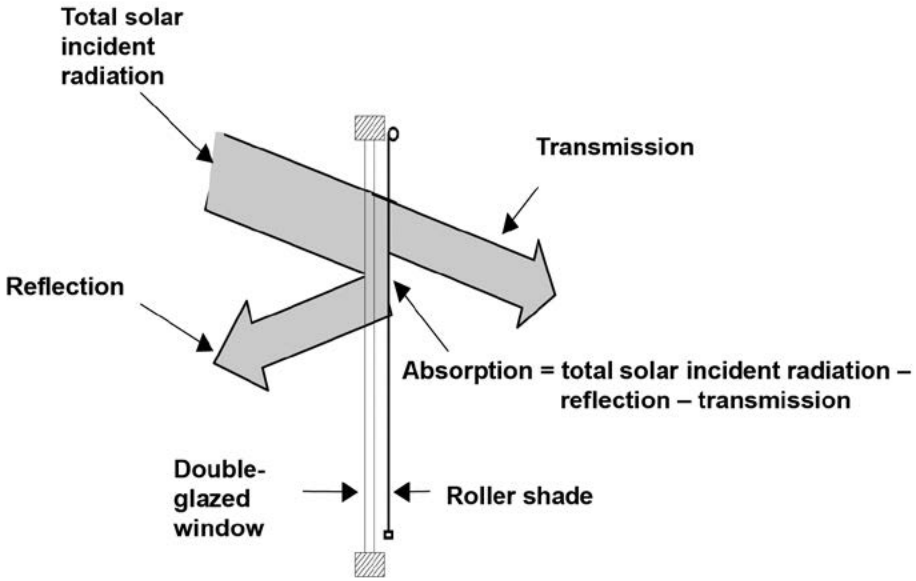


**UV PROTECTION (and Blackout Fabrics)**: The total solar incident radiation of wavelengths between 280 nm and 2500 nm is measured and optical values are reported. UV-light is included in these wavelengths. For those of our fabrics that are Blackout the transmission of light is 0 %. This signifies 100 % blocking of all sunlight, including UV-light. The UV-protection is 100 % for the fabric. In order to get complete blocking of the light the fabric has to be fitted so that no light is transmitted on the sides of the fabric. *The higher the number, the better.*

# SOLAR OPTICAL CHART

| Collection Code | Collection Name | Color | Color Name | Openness | Transmission* | Reflection* | Absorption* | UV Rating |
|---|---|---|---|---|---|---|---|---|
| LS013 | 1% Catalina | 01 | Powder | 1% | 20 | 65 | 15 | 99% |
| LS013 | 1% Catalina | 02 | Bone | 1% | 18 | 55 | 27 | 99% |
| LS013 | 1% Catalina | 03 | Nickel | 1% | 14 | 50 | 36 | 99% |
| LS013 | 1% Catalina | 04 | Bronze | 1% | 1 | 4 | 95 | 99% |
| LS013 | 1% Catalina | 05 | Onyx | 1% | 1 | 3 | 96 | 99% |
| LS013 | 1% Catalina | 06 | Carbon | 1% | 4 | 14 | 82 | 99% |
| LS010 | 1% Newport | 01 | Powder | 1% | 10 | 65 | 25 | 99% |
| LS010 | 1% Newport | 02 | Bone | 1% | 15 | 58 | 27 | 99% |
| LS010 | 1% Newport | 03 | Nickel | 1% | 10 | 48 | 42 | 99% |
| LS010 | 1% Newport | 04 | Bronze | 1% | 1 | 5 | 94 | 99% |
| LS010 | 1% Newport | 05 | Onyx | 1% | 1 | 4 | 95 | 99% |
| LS010 | 1% Newport | 06 | Carbon | 1% | 4 | 10 | 86 | 99% |
| LS049 | 1% Solapur | 01 | Powder | 1% | 26 | 66 | 8 | 99% |
| LS049 | 1% Solapur | 03 | Onyx | 1% | 0 | 3 | 96 | 99% |
| LS049 | 1% Solapur | 04 | Bronze | 1% | 0 | 5 | 95 | 99% |
| LS049 | 1% Solapur | 05 | Bone | 1% | 12 | 73 | 15 | 99% |
| LS049 | 1% Solapur | 06 | Nickel | 1% | 5 | 58 | 37 | 99% |
| LS008 | 3% Acadia | 01 | Powder | 3% | 25 | 65 | 10 | 97% |
| LS008 | 3% Acadia | 02 | Bone | 3% | 25 | 53 | 22 | 97% |
| LS008 | 3% Acadia | 03 | Nickel | 3% | 16 | 40 | 44 | 97% |
| LS008 | 3% Acadia | 04 | Onyx | 3% | 5 | 6 | 89 | 97% |
| LS008 | 3% Acadia | 05 | Carbon | 3% | 7 | 21 | 72 | 97% |
| LS026 | 3% Barcelona | 01 | Westport Gray | 3% | N/A | N/A | N/A | 97% |
| LS026 | 3% Barcelona | 02 | Royal Navy | 3% | N/A | N/A | N/A | 97% |
| LS014 | 3% Catalina | 01 | Powder | 3% | 23 | 64 | 13 | 97% |
| LS014 | 3% Catalina | 02 | Bone | 3% | 17 | 51 | 32 | 97% |
| LS014 | 3% Catalina | 03 | Nickel | 3% | 15 | 44 | 41 | 97% |
| LS014 | 3% Catalina | 04 | Bronze | 3% | 4 | 5 | 91 | 97% |
| LS014 | 3% Catalina | 05 | Onyx | 3% | 4 | 5 | 91 | 97% |
| LS014 | 3% Catalina | 06 | Carbon | 3% | 4 | 13 | 83 | 97% |
| LS006 | 3% Malibu | 01 | Cinnamon | 3% | 6 | 22 | 72 | 97% |
| LS006 | 3% Malibu | 02 | Beechwood | 3% | 7 | 37 | 56 | 97% |
| LS006 | 3% Malibu | 03 | Cappuccino | 3% | 9 | 35 | 55 | 97% |
| LS006 | 3% Malibu | 04 | Honeywheat | 3% | 9 | 44 | 47 | 97% |
| LS011 | 3% Newport | 01 | Powder | 3% | 11 | 65 | 24 | 97% |
| LS011 | 3% Newport | 02 | Bone | 3% | 16 | 57 | 27 | 97% |
| LS011 | 3% Newport | 03 | Nickel | 3% | 12 | 47 | 41 | 97% |
| LS011 | 3% Newport | 04 | Bronze | 3% | 4 | 4 | 92 | 97% |
| LS011 | 3% Newport | 05 | Onyx | 3% | 4 | 3 | 93 | 97% |
| LS011 | 3% Newport | 06 | Carbon | 3% | 6 | 9 | 85 | 97% |
| LS027 | 3% Providence | 02 | Amore Pink | 3% | N/A | N/A | N/A | 97% |
| LS027 | 3% Providence | 03 | Silver | 3% | N/A | N/A | N/A | 97% |
| LS027 | 3% Providence | 04 | Soft Sky | 3% | N/A | N/A | N/A | 97% |
| LS027 | 3% Providence | 05 | Fair Haven | 3% | N/A | N/A | N/A | 97% |
| LS027 | 3% Providence | 06 | Seabrook | 3% | N/A | N/A | N/A | 97% |
| LS050 | 3% Revival | 01 | Static Noise | 3% | N/A | N/A | N/A | 97% |

# SOLAR OPTICAL CHART

| Collection Code | Collection Name | Color | Color Name | Openness | Transmission* | Reflection* | Absorption* | UV Rating |
|---|---|---|---|---|---|---|---|---|
| LS050 | 3% Revival | 02 | Paradise | 3% | N/A | N/A | N/A | 97% |
| LS050 | 3% Revival | 03 | Enchantment | 3% | N/A | N/A | N/A | 97% |
| LS028 | 3% Shangrila | 02 | Sand | 3% | N/A | N/A | N/A | 97% |
| LS028 | 3% Shangrila | 03 | Sea Grass | 3% | N/A | N/A | N/A | 97% |
| LS048 | 3% Solapur | 01 | Powder | 3% | 30 | 63 | 8 | 95% |
| LS048 | 3% Solapur | 03 | Onyx | 3% | 3 | 3 | 93 | 97% |
| LS048 | 3% Solapur | 04 | Bronze | 3% | 3 | 6 | 91 | 97% |
| LS048 | 3% Solapur | 05 | Bone | 3% | 15 | 70 | 15 | 97% |
| LS048 | 3% Solapur | 06 | Nickel | 3% | 8 | 51 | 40 | 97% |
| LS045 | 3% Stonewash | 01 | Fossil | 3% | N/A | N/A | N/A | 97% |
| LS045 | 3% Stonewash | 02 | Denim | 3% | N/A | N/A | N/A | 97% |
| LS045 | 3% Stonewash | 03 | Ocean | 3% | N/A | N/A | N/A | 97% |
| LS009 | 5% Acadia | 01 | Powder | 5% | 25 | 62 | 13 | 95% |
| LS009 | 5% Acadia | 02 | Bone | 5% | 24 | 52 | 24 | 95% |
| LS009 | 5% Acadia | 03 | Nickel | 5% | 16 | 38 | 46 | 95% |
| LS009 | 5% Acadia | 04 | Onyx | 5% | 6 | 5 | 89 | 95% |
| LS009 | 5% Acadia | 05 | Carbon | 5% | 7 | 16 | 77 | 95% |
| LS015 | 5% Catalina | 01 | Powder | 5% | 25 | 62 | 13 | 95% |
| LS015 | 5% Catalina | 02 | Bone | 5% | 23 | 51 | 26 | 95% |
| LS015 | 5% Catalina | 03 | Nickel | 5% | 18 | 44 | 38 | 95% |
| LS015 | 5% Catalina | 04 | Bronze | 5% | 4 | 5 | 91 | 95% |
| LS015 | 5% Catalina | 05 | Onyx | 5% | 5 | 5 | 90 | 95% |
| LS015 | 5% Catalina | 06 | Carbon | 5% | 6 | 12 | 82 | 95% |
| LS005 | 5% Key West | 01 | Cocoa | 5% | 6 | 12 | 82 | 95% |
| LS005 | 5% Key West | 02 | Doe | 5% | 12 | 37 | 51 | 95% |
| LS005 | 5% Key West | 03 | Mink | 5% | 9 | 24 | 68 | 95% |
| LS005 | 5% Key West | 04 | Oatmeal | 5% | 19 | 65 | 16 | 95% |
| LS005 | 5% Key West | 05 | Burlap | 5% | 16 | 45 | 39 | 95% |
| LS005 | 5% Key West | 06 | Barley | 5% | 19 | 56 | 24 | 95% |
| LS005 | 5% Key West | 07 | Iron Ore | 5% | 5 | 11 | 84 | 95% |
| LS012 | 5% Newport | 01 | Powder | 5% | 15 | 63 | 22 | 95% |
| LS012 | 5% Newport | 02 | Bone | 5% | 18 | 56 | 26 | 95% |
| LS012 | 5% Newport | 03 | Nickel | 5% | 14 | 46 | 40 | 95% |
| LS012 | 5% Newport | 04 | Bronze | 5% | 6 | 4 | 90 | 95% |
| LS012 | 5% Newport | 05 | Onyx | 5% | 6 | 4 | 90 | 95% |
| LS012 | 5% Newport | 06 | Carbon | 5% | 8 | 9 | 83 | 95% |
| LS047 | 5% Solapur | 01 | Powder | 5% | 32 | 61 | 8 | 95% |
| LS047 | 5% Solapur | 03 | Onyx | 5% | 6 | 3 | 91 | 95% |
| LS047 | 5% Solapur | 04 | Bronze | 5% | 7 | 6 | 87 | 95% |
| LS047 | 5% Solapur | 05 | Bone | 5% | 18 | 66 | 15 | 95% |
| LS047 | 5% Solapur | 06 | Nickel | 5% | 11 | 45 | 44 | 95% |
| LS007 | 5% Sonoma | 01 | Moss | 5% | N/A | N/A | N/A | 95% |
| LS007 | 5% Sonoma | 02 | Ocean | 5% | N/A | N/A | N/A | 95% |
| LS007 | 5% Sonoma | 03 | Biscuit | 5% | N/A | N/A | N/A | 95% |
| LS007 | 5% Sonoma | 04 | Sea Glass | 5% | N/A | N/A | N/A | 95% |
| LS007 | 5% Sonoma | 05 | Blush | 5% | N/A | N/A | N/A | 95% |
| LS007 | 5% Sonoma | 06 | Rosemary | 5% | 10 | 31 | 59 | 95% |
| LS007 | 5% Sonoma | 07 | Java | 5% | 8 | 15 | 77 | 95% |


# SOLAR OPTICAL CHART

| Collection Code | Collection Name | Color | Color Name | Openness | Transmission* | Reflection* | Absorption* | UV Rating |
|---|---|---|---|---|---|---|---|---|
| LS007 | 5% Sonoma | 08 | Pebble | 5% | 9 | 33 | 58 | 95% |
| LS007 | 5% Sonoma | 09 | Merlot | 5% | N/A | N/A | N/A | 95% |
| LS007 | 5% Sonoma | 10 | Toast | 5% | 12 | 42 | 46 | 95% |
| LS046 | 10% Solapur | 01 | Powder | 10% | 34 | 59 | 7 | 90% |
| LS046 | 10% Solapur | 03 | Onyx | 10% | 12 | 3 | 85 | 90% |
| LS046 | 10% Solapur | 04 | Bronze | 10% | 12 | 6 | 82 | 90% |
| LS046 | 10% Solapur | 05 | Bone | 10% | 22 | 66 | 12 | 90% |
| LS046 | 10% Solapur | 06 | Nickel | 10% | N/A | N/A | N/A | 90% |


*See **SOLAR OPTICAL INFORMATION** section for detail.

## Fabric Valance

| Isometric Item # | Part # | Description |
|---|---|---|
| 1 | Fabric PN | Fabric |
| 2 | 1003377 | Valance - ULTRA RS VALANCE 3.5 WHT 192 2 |
| 3 | 1003297 | Return - VAL RND CORNER 3.5X1001 |
| 4 | 1100071 | Valance Corner (FOR RETURN OPTION ONLY) - RND 3.5 WHT-CLR CAP |
| 5 | LBV20 | Instl. brackets - WALL BRACKETS 2IN - ULTRA RS V |
| 6 | KIT-RS-001R | Instl. screws - KIT SCREWS 02-70-9021 4PKI |

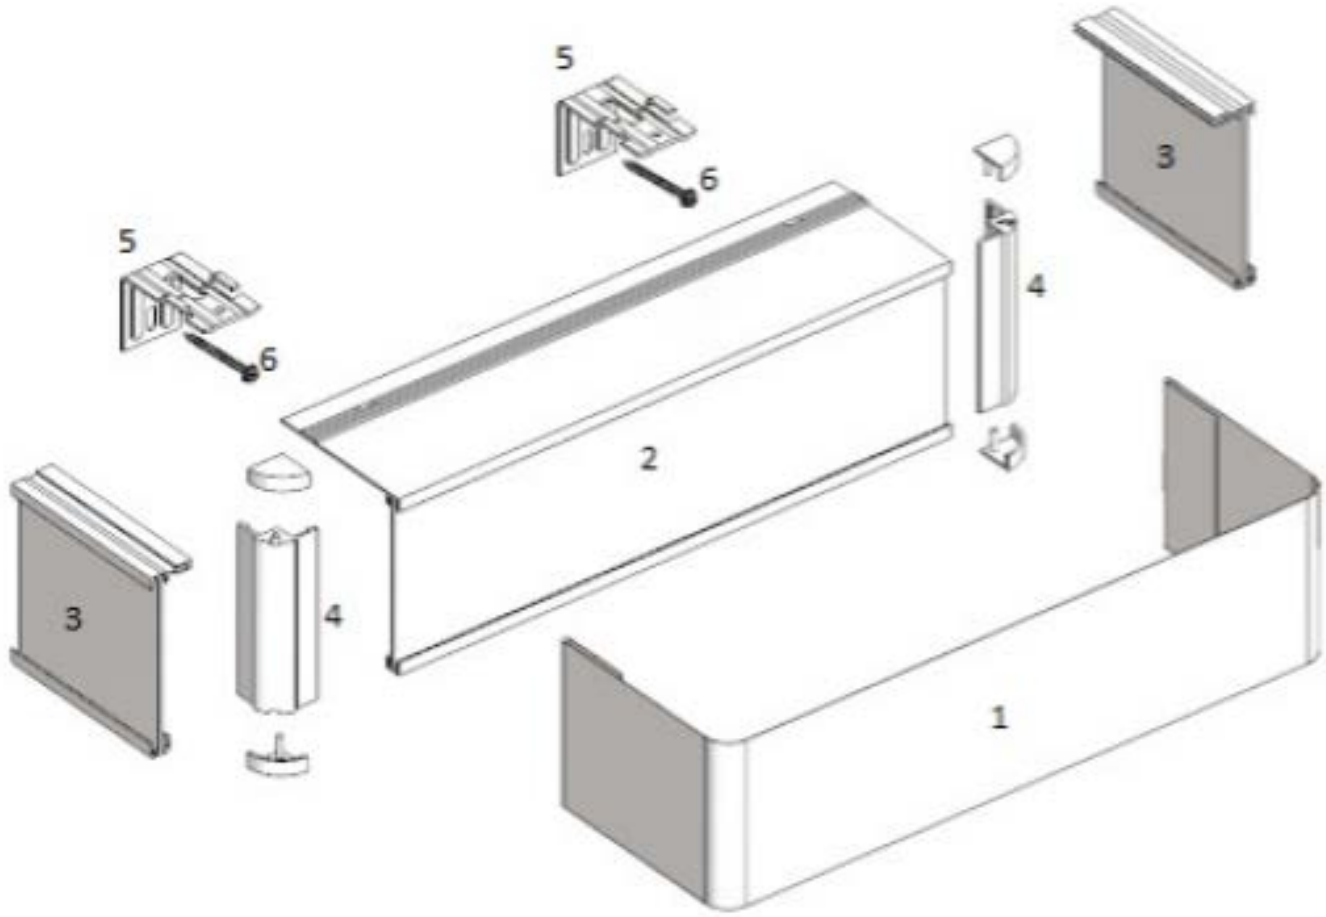

## Cordless Lift PerfectPlacement™ Open Roll

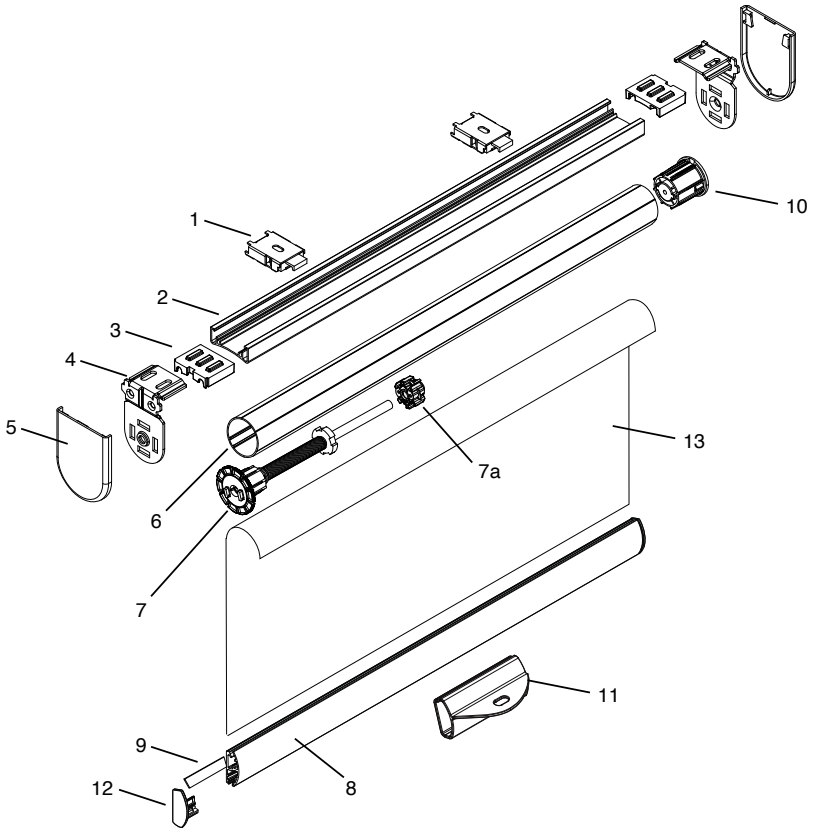


**1. Mounting Brackets**
KIT-RS-012R KIT CORDLESS BKT 2PK
KIT-RS-013R KIT CORDLESS BKT 3PK

**2. Mounting Bar**
1049285 - White
1049287 - Vanilla
1049286 - Anodized
1049288 - Bronze
1049284 - Black

**3. Filler Block**
1050873 - Clear Opaque

**4. Mounting Bar Bracket**
1049569 - 40mm White
1049570 - 40mm Vanilla
1049571 - 40mm Zinc
1049572 - 40mm Bronze
1049573 - 40mm Black
1049574 - 55mm White
1049575 - 55mm Vanilla
1049576 - 55mm Zinc
1049577 - 55mm Bronze
1049578 - 55mm Black

**5. Bracket Cover**
1044231 - 40mm White
1044232 - 40mm Vanilla
1044233 - 40mm Gray
1044235 - 40mm Bronze
1044234 - 40mm Black
1044236 - 55mm White
1044237 - 55mm Vanilla
1044238 - 55mm Gray
1044240 - 55mm Bronze
1044239 - 55mm Black

**6. Tube**
11181712-010101

**7. Springs**
1052393 Spring A
1052394 Spring B
1052395 Spring C
1052396 Spring D
1052397 Spring E
1052398 Spring F
1052399 Spring G
1052400 Spring H
1052401 Spring I
1052402 Spring J
1052403 Spring K
1052404 Spring L

Not shown:
1052405 Internal head lock
1052406 Internal head spring

**7a. Brake (if applicable)**
1051055

**8. Omni Bottom Rail**
1031843 - Matte Silver
1031844 - Matte White
1031845 - Matte Black
1031846 - Matte Vanilla
1031847 - Matte Bronze

**9. Spline**
RC445085


**10. Idler**
1053024

**11. Handle for Omni Bottomrail**
1042827 - Clear

**12. Endcap for Omni Bottomrail**
1045036 - White
1045037 - Vanilla
1045038 - Gray
1045039 - Black
1045040 - Bronze

**13. Roller Fabric**

## Cordless Lift PerfectPlacement™ Cassette

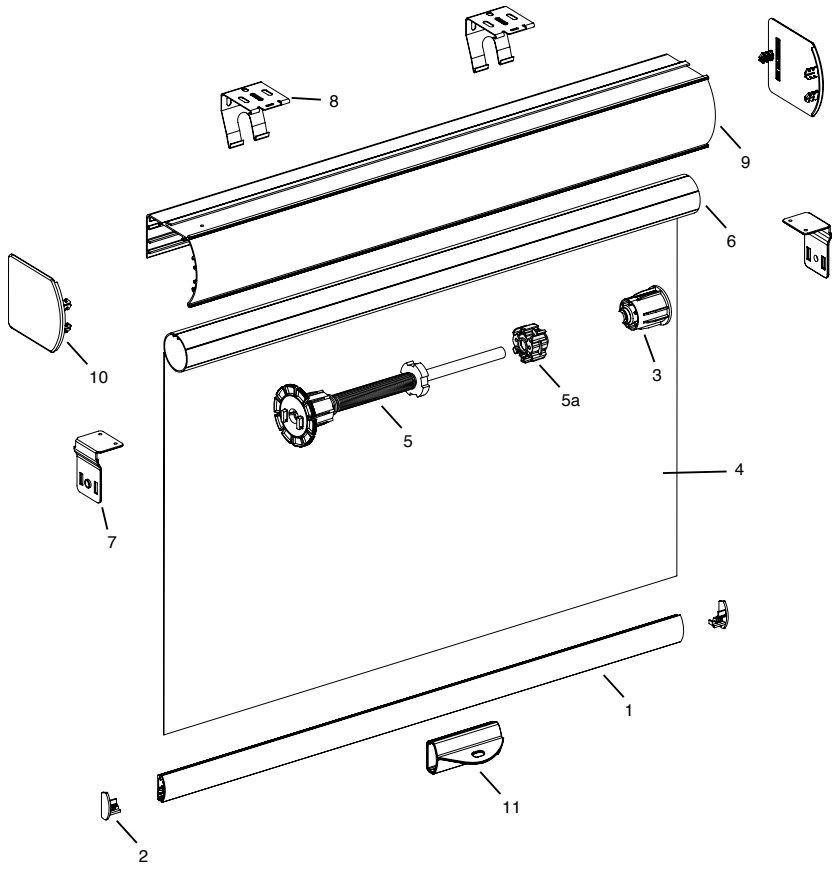


**1. Omni Bottom Rail**
1031843 - Silver
1031844 - White
1031845 - Black
1031846 - Vanilla
1031847 - Bronze

**2. Omni Bottom Rail End Cap**
1045036 - White
1045037 - Vanilla
1045038 - Gray
1045039 - Black
1045040 - Bronze

**3. Idler**
1053024

**4. Roller Fabric**

**5. Springs**
1052393 Spring A
1052394 Spring B
1052395 Spring C
1052396 Spring D
1052397 Spring E
1052398 Spring F
1052399 Spring G
1052400 Spring H
1052401 Spring I
1052402 Spring J
1052403 Spring K
1052404 Spring L

Not Shown:
1052405 Internal Head Lock
1052406 Internal Head Spring

**5a. Brake (if applicable)**
1051055

**6. Tube**
11181712-010101 - Tube 1.5"

**7. Bracket**
CRUSLB660

**8. Installation Bracket**
SB20-0202-025100 Cassette 100 Mounting Bracket Zinc
(KIT-RS-008R 2PK; KIT-RS-009R 3PK)
V2BKT Large Cassette Mounting Bracket
(KIT-RS-006R 2PK; KIT-RS-007R 3PK)

**9. Large Curved Cassette**
1033801 - Silver
1033800 - Black
1033802 - Bronze
1033799 - White
1033803 - Vanilla


**Medium Curved Cassette**
1033798 - White
1033795 - Black
1033796 - Bronze
1033797 - Vanilla
1033794 - Silver

**10. Large Curved End Cap**
1033814 - Black
1033815 - White
1033816 - Bronze
1033817 - Vanilla
1033818 - Gray

**Medium Curved End Cap**
1033813 - White
1033812 - Vanilla
1033811 - Bronze
1033810 - Black
1033809 - Gray

**11. Handle**
1042827 - Handle; Omni w/Tab

## Continuous Loop Control

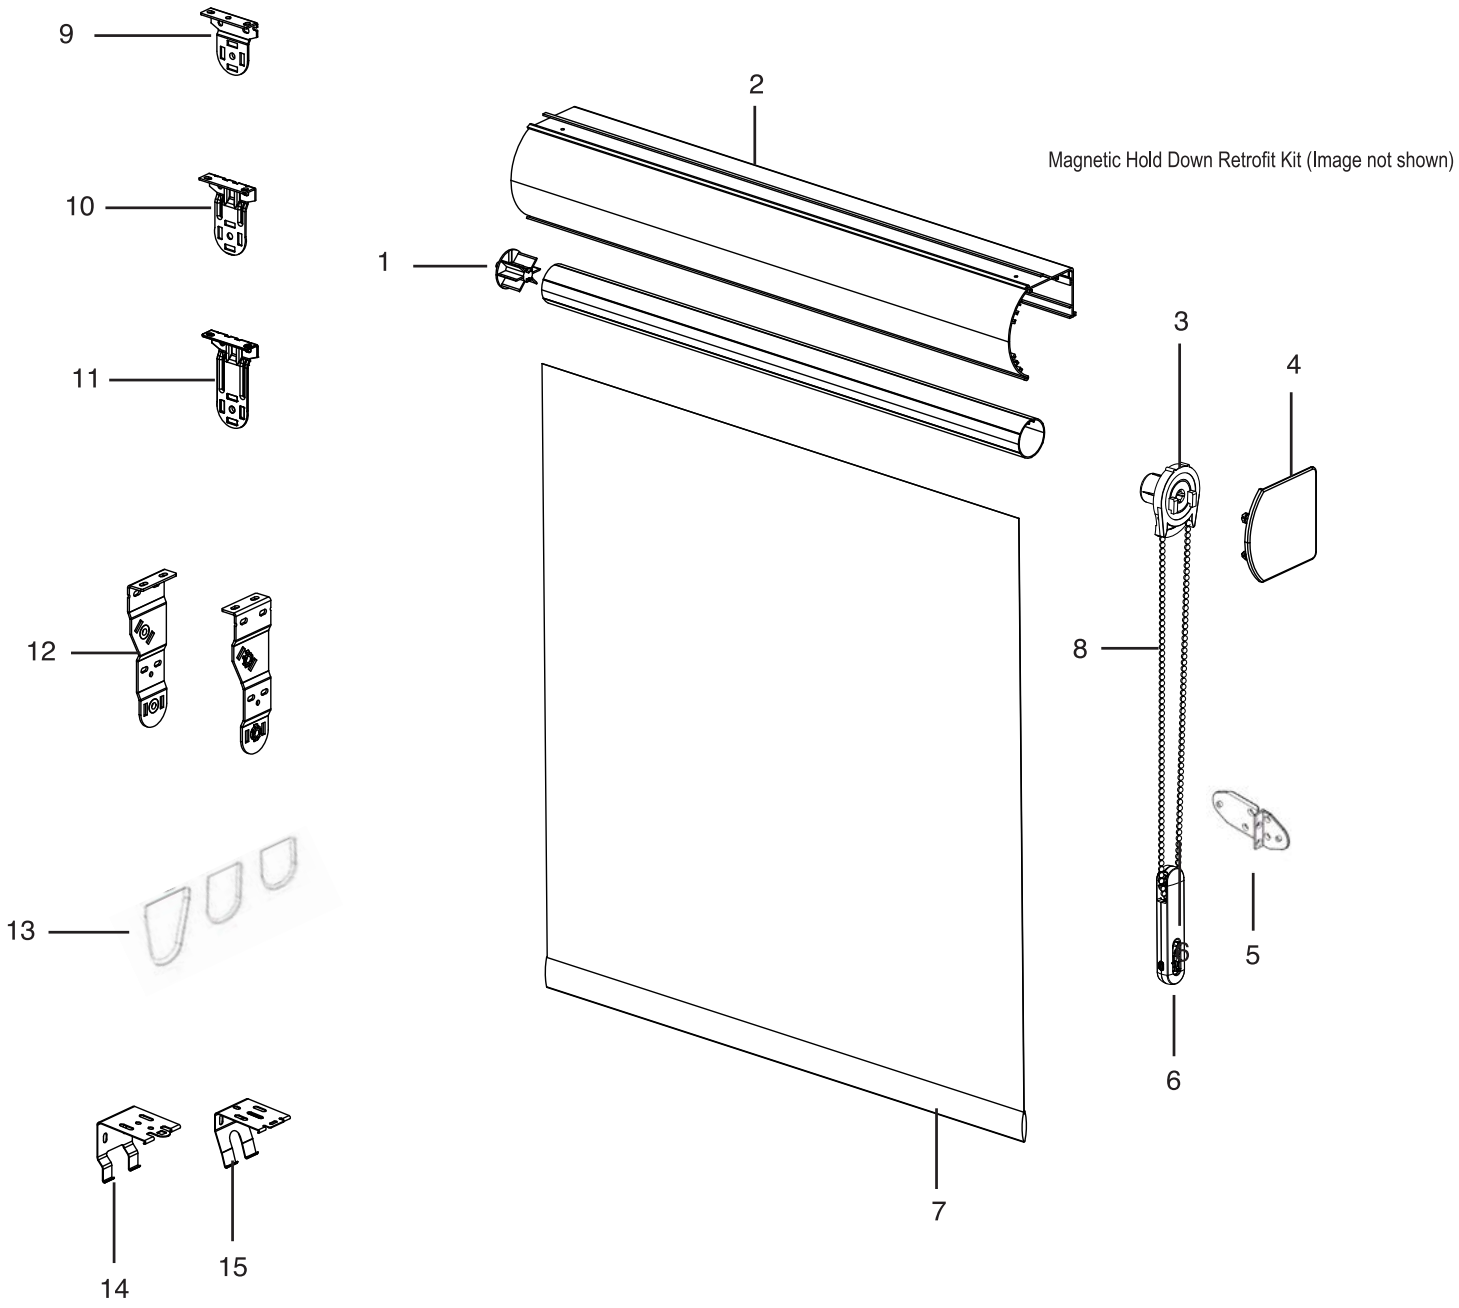

## Continuous Loop Control

**1. End Plug For 1.5" Tube**
3202504661 - White
3202504765 - Black
3202504048 - Gray

**For 2" Tube, Large Shades**
SLPEHD53W - White
SLPEHD53BK - Black

**2. Large Cassette**
1033801 - Silver
1033800 - Black
1033802 - Bronze
1033799 - White
1033803 - Vanilla

**Medium Cassette**
1033798 - White
1033795 - Black
1033796 - Bronze
1033797 - Vanilla
1033794 - Silver

**3. Clutch**
1043975 - White
1043976 - Black
SL20H53W - White
SL20H53BK - Black
SL30H53W - White
SL30H53BK - Black

**4. Large End Cap**
1033814 - Black
1033815 - White
1033816 - Bronze
1033817 - Vanilla
1033818 - Gray

**Medium End Cap**
1033813 - White
1033812 - Vanilla
1033811 - Bronze
1033810 - Black
1033809 - Gray

**5. Tensioner Bracket Mounting Kit**
1045675

**6. Tensioner**
1042235 - Black
1042236 - Bronze
1042237 - Stainless Steel
1044053 - Rich Cream
1044054 - White Tiara

**7. Heat Sealed Bottomrail**
2361-01-000

**8. Plastic Chain**
**White**
1045995 - 24"
1045996 - 30"
1045997 - 36"
1045998 - 42"
1045999 - 48"
1046000 - 54"
1046001 - 60"
1046002 - 66"
1046003 - 72"
1046005 - 84"
1046007 - 96"

**Grey**
1046008 - 24"
1046009 - 30"
1046010 - 36"
1046011 - 42"
1046012 - 48"
1046013 - 54"
1046014 - 60"
1046015 - 66"
1046016 - 72"
1046018 - 84"
1046020 - 96"

**Black**
1046021 - 24"
1046022 - 30"
1046023 - 36"
1046024 - 42"
1046025 - 48"
1046026 - 54"
1046027 - 60"
1046028 - 66"
1046029 - 72"
1046031 - 84"
1046033 - 96"

**Vanilla**
1046034 - 24"
1046035 - 30"
1046036 - 36"
1046037 - 42"
1046038 - 48"
1046039 - 54"
1046040 - 60"
1046041 - 66"
1046042 - 72"
1046044 - 84"
1046046 - 96"

**Brown**
1046047 - 24"
1046049 - 36"
1046050 - 42"
1046051 - 48"
1046052 - 54"
1046053 - 60"
1046054 - 66"
1046055 - 72"
1046057 - 84"
1046059 - 96"

**Metal Chain**
1034758 - Gun Metal
RC133307 - Stainless Steel
1044497 - Oil Rubbed Bronze

**9. Universal Brackets 40mm**
1021242 - 40mm White
1021244 - 40mm Black

**10. Universal Brackets 55mm**
1021245 - 55mm White
1021247 - 55mm Black

**11. Universal Brackets 75mm**
3200903661 - 75mm White
3200903048 - 75mm Black

**12. Dual Mounting Brackets**
XLB61 - White
XLB65 - Black

**13. Bracket Covers**
**40mm Cover**
1044231 - White
1044232 - Vanilla
1044233 - Gray
1044234 - Black
1044235 - Bronze


**55mm Cover**
1044236 - White
1044237 - Vanilla
1044238 - Gray
1044239 - Black
1044240 - Bronze

**75mm Cover**
1044241 - White
1044242 - Vanilla
1044243 - Gray
1044244 - Black
1044245 - Bronze

**14. Standard Bracket Large Curved Cassette**
KIT-RS-006R - 2 pack
KIT-RS-007R - 3 pack

**15. Standard Bracket Medium Curved Cassette**
KIT-RS-008R - 2 pack
KIT-RS-009R - 3 pack

**InMotion™ Wand**

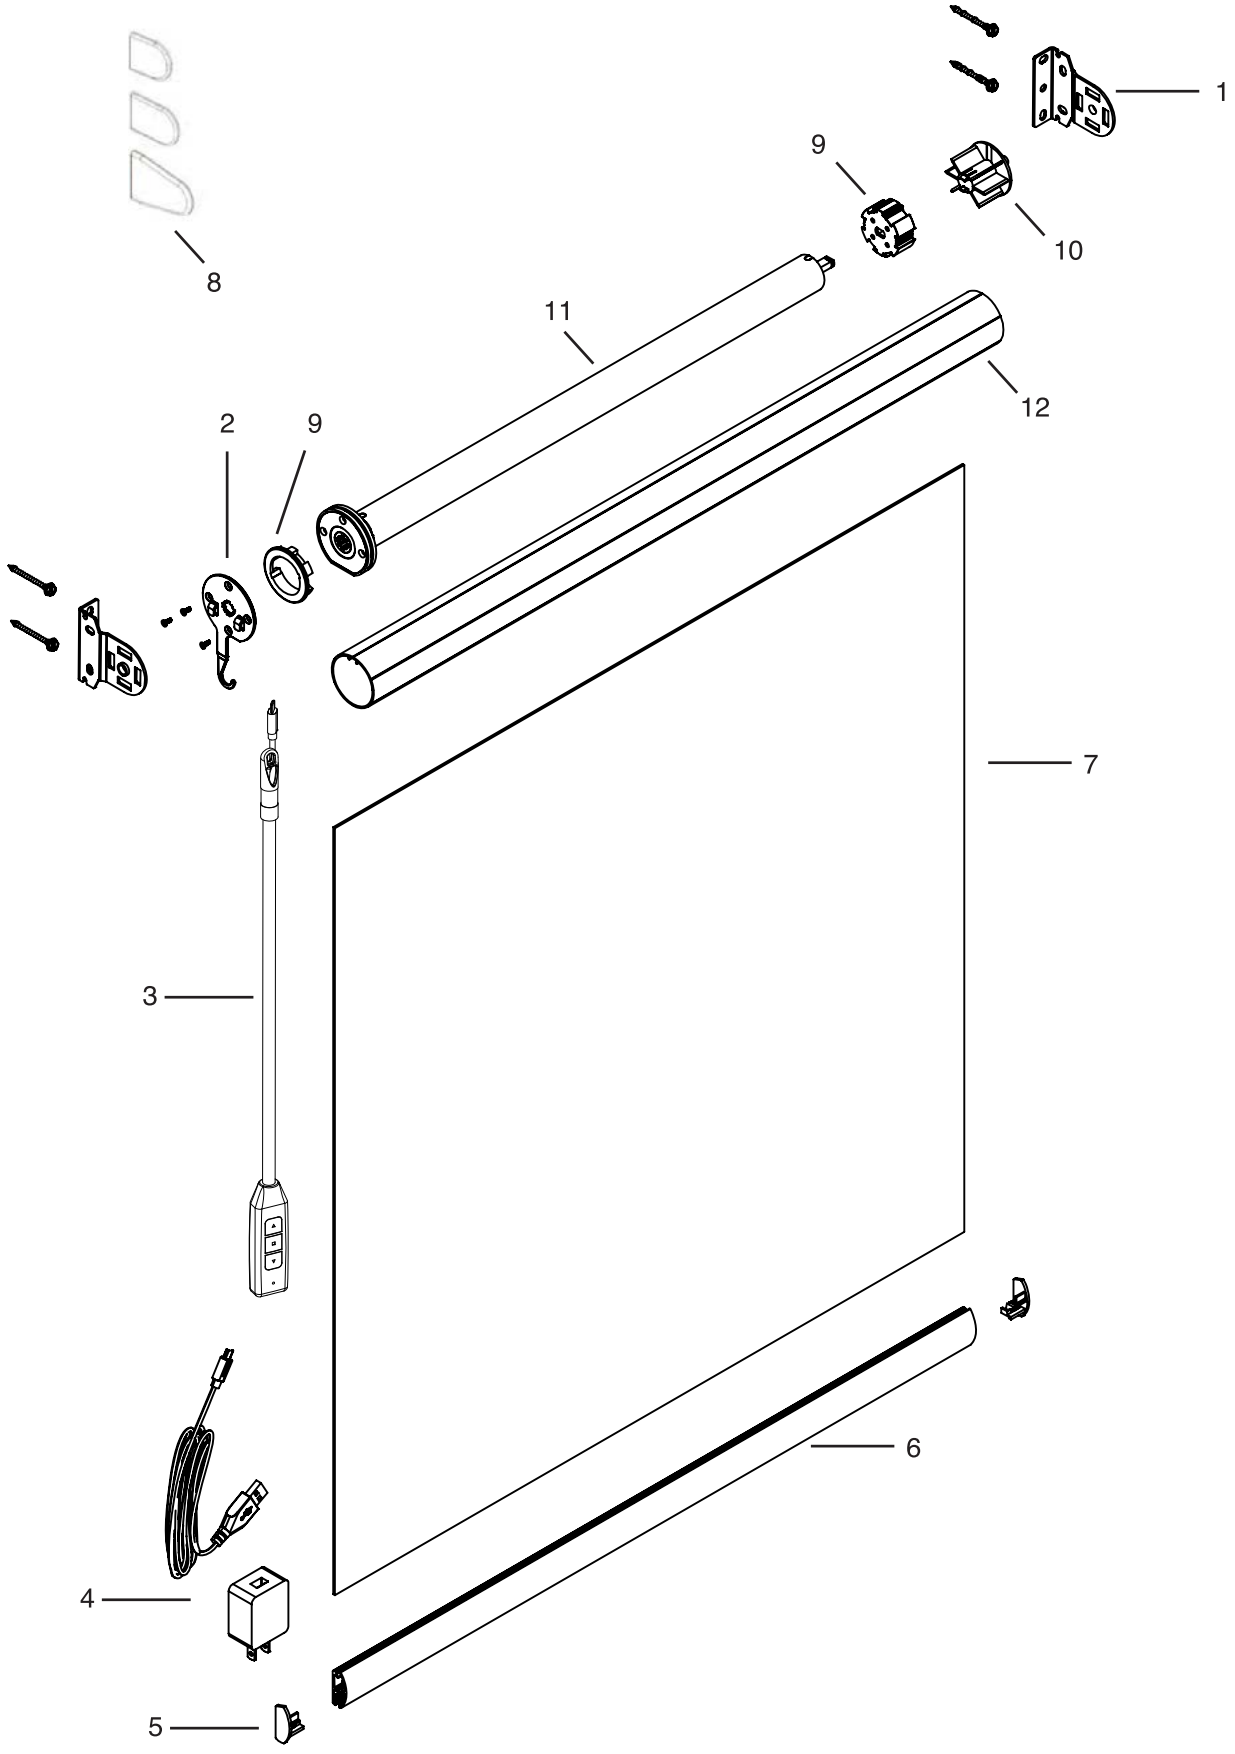

## InMotion™ Wand

1. **Bracket**
   1021242 - 40mm White
   1021244 - 40mm Black
   1021245 - 55mm White
   1021247 - 55mm Black
   3200903661 - 75mm White
   3200903048 - 75mm Black

2. **Hanger**
   1034422 - White
   1034423 - Black

3. **InMotion™ Wand**
   **1FT Wand**
   1034303 - White
   1034408 - Vanilla
   1034413 - Gray
   1034403 - Bronze
   1034308 - Black

   **2FT Wand**
   1034304 - White
   1034409 - Vanilla
   1034414 - Gray
   1034404 - Bronze
   1034309 - Black

   **3FT Wand**
   1034305 - White
   1034410 - Vanilla
   1034415 - Gray
   1034405 - Bronze
   1034400 - Black

   **4FT Wand**
   1034306 - White
   1034411 - Vanilla
   1034416 - Gray
   1034406 - Bronze
   1034401 - Black

   **5FT Wand**
   1034307 - White
   1034412 - Vanilla
   1034417 - Gray
   1034407 - Bronze
   1034402 - Black

   **6FT Wand**
   1040190 - White
   1040191 - Vanilla
   1040192 - Gray
   1040193 - Bronze
   1040194 - Black

4. **InMotion™ Wand Charger**
   1027720

5. **Omni Bottomrail Endcap**
   1045036 - White
   1045037 - Vanilla
   1045038 - Gray
   1045039 - Black
   1045040 - Bronze

6. **Omni Curved Bottomrail**
   1031843 - Silver
   1031844 - White
   1031845 - Black
   1031846 - Vanilla
   1031847 - Bronze

7. **Fabric**

8. **Open Roll Bracket Covers**
   **40mm Cover**
   1044231 - White
   1044232 - Vanilla
   1044233 - Gray
   1044234 - Black
   1044235 - Bronze

   **55mm Cover**
   1044236 - White
   1044237 - Vanilla
   1044238 - Gray
   1044239 - Black
   1044240 - Bronze

   **75mm Cover**
   1044241 - White
   1044242 - Vanilla
   1044243 - Gray
   1044244 - Black
   1044245 - Bronze

9. **Crown/Drive**
   1034420 25mm for 1.5" Tube

10. **End Plug**
    3202504765 Gray
    3202504661 White
    3202504048 Black

11. **Motor**
    1034419 - 1.0Nm
    1045483 - 2.0Nm

12. **Tube**
    11181712-010101 Tube 1.5"